

# ACED4820S



- 48 X 20W high-power RGBW 4in1 Leds
- 8 individually controllable segments
- LumenRadio W-DMX (optional)
- Excellent linear dimming and color mixing effects
- Seetronic IP Power TRUE1 and XLR connectors
- Easy-to-use diffuser and barndoor (optional)



## Light Source

Source: 48X20W 4-IN-1 RGBW LEDs  
Flicker free operation for broadcast TV and FILM  
Life Span: 50,000 hours  
The life span may vary depending on several following factors but not limited to:  
Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control, and Dimming, etc)

## Optics

48PCS high efficiency acrylic lens  
25° /35° /45° Lens optional  
Easy-to-use diffuser filter (customization options)  
Easy-to-use 8 way barndoors (optional)

## Colors

8 Segments controllable individually  
Sophisticated 4 colors RGBW mixed  
Even and soft light coverage with pure mixing  
Preset color macros

## Strobe Effect

0-25Hz high speed shutter/strobe effect with variable speed

## Dimming System

0-100% Smooth linear LED dimming  
Smoother dimming mode available

## Control System

8/13/16/21/33/48 DMX channels  
DMX512, RDM, Master-slave, Auto, W-DMX (optional)  
Multi preset internal programs  
Shielded input signal protection for stable signal without interference  
Seetronic IP65 3-Pin or 5-Pin XLR connectors IN/OUT

## Display System

1.77" TFT LCD display

English/Chinese menu

4 control touch buttons  
180° Reversible for LCD display  
Display auto OFF

## Cooling System

Active, Forced Air, Temperature regulated  
Over temperature protection management

## Power Supply

1100W power supply  
AC100-240V 50/60Hz  
Seetronic IP65 PowerCON TRUE1 IN/OUT

## Housing

Aluminium, steel, plastic PC/ASA, rubber, Lens PE and tempered glass front  
Tilt angle manually adjustable  
Two side handles on base  
Exterior finish: Black

## Installation

2\*1/4 turn fastening Omega Clamps  
1\*Safety attachment point

## Operating Condition

Operating positions:  
all (device on floor or fixed to a support)  
-25° to 45° ambient temperature  
IP65 protection rating

## Weight

N.W.: 10.6kg


## Dimensions

Product Dimensions:  
570(D)\*150(W)\*320(H)mm

## Accessories




8-way Barndoors (Optional)

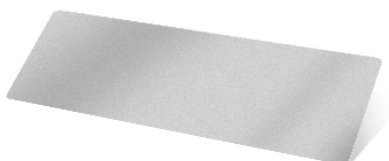

Diffuser (Optional)

# Dimension

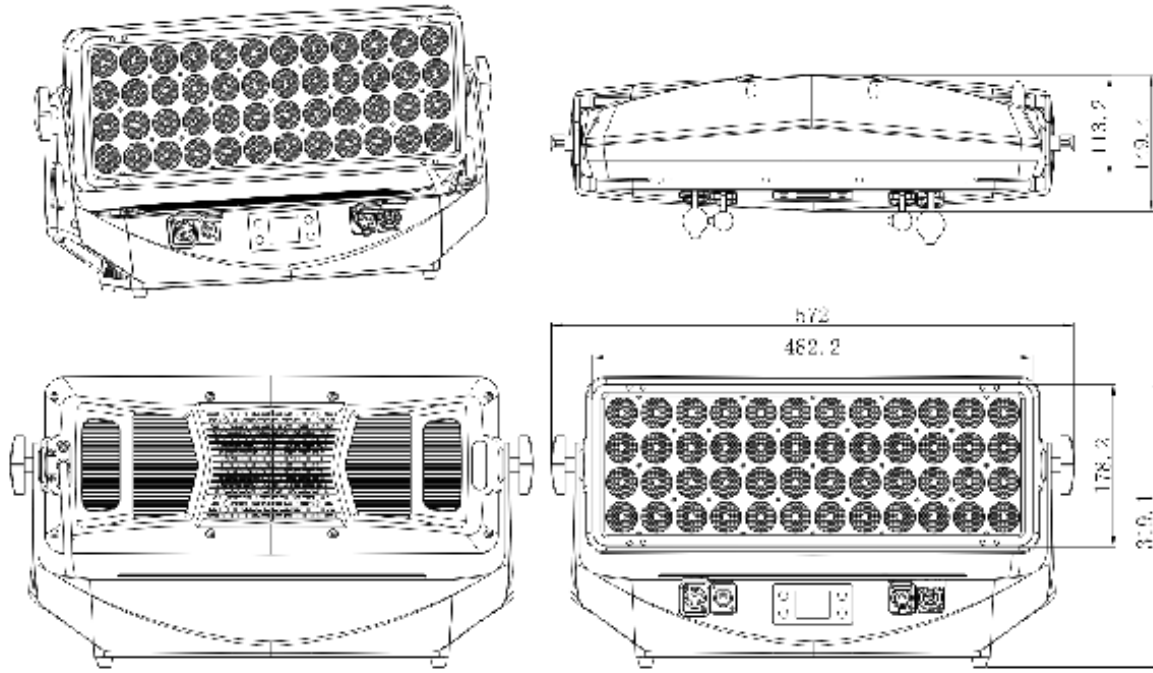

# Photometrics

