



LZC WTED 温州锐志包装机械有限公司
WENZHOU RUIZHI PACKING MACHINERY CO.,LTD.

Add: No. 889 Xinggong Road, Wanquan Town,
Pingyang County, Wenzhou, Zhejiang, China
Tel: +86-0577-6378 5977
P.C: 325400
E-mail: sales@wzruizhi.com
Web: www.wzruizhi.com

地址: 浙江省温州市平阳县万全镇兴工路889号
国内销售电话: 0577-63785588
外贸部电话: 0577-63785977
邮箱: sales@wzruizhi.com
网址: www.wzruizhi.cn




New Products
Catalog



Perfect Solutions
Applicable To Paper Bags

适用于环保纸袋的完美解决方案



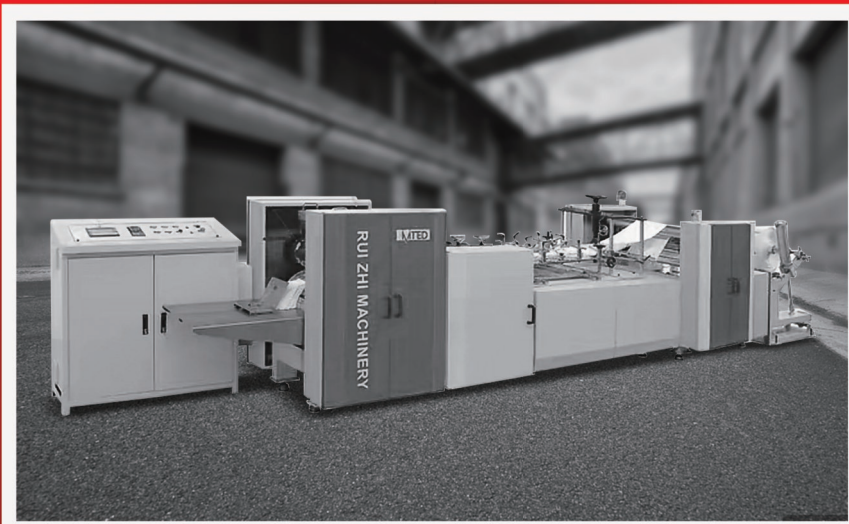

SINCE
2003

Ruizhi's first equipment was born in Ruian
锐志第一台设备在瑞安诞生



NOW
500+

Our products are gaining benefits for users in every corner of the world.
设备正在全球每个角落为用户赢得效益

여보세요

Korea

ألو

Saudi Arabia

喂

China

Olá

Portugal

もしもし

Japan

Allo

France

Xin chào

Vietnam

Hola

Spain

hello

America

Hallo

Germany

Halo

Indonesia

MISSION 使命

Dedicated to providing environmental protection equipment

为人类环保设备而努力

VISION 愿景

Strive for providing the world's leading environmental protection packaging equipment

创世界领先环保包装设备

VALUES 价值观

Quality is the guarantee. Research and sales is the soul. Management is the foundation. Planning, Action, Innovation Integrity, Win-win
质量是保障 研销是灵魂 管理是根基 规划 行动 创新 诚信 共赢

LISTEN TO THE WORLD GLOBAL SERVICE

倾听世界 服务全球

Wenzhou Ruizhi Packing Machinery Co., Ltd. established in 2003, The earliest leader in the packaging machinery industry .. For many years, Ruizhi has adhered to the road of independent innovation and continuously innovated. With a professional R&D team, drawing on the advanced design concepts and production processes of Germany and the United States, combined with various domestic and international needs, the company has developed a variety of series of sharp bottom paper bag machines and square bottom paper bags, and obtained more than a dozen. National patents products have all passed the quality supervision and inspection center of Zhejiang Province, and passed the appraisal of the technical achievements of the Provincial Science and Technology Commission. All the technical indicators are at the leading level of similar products in China.

The company's food flat bottom paper bag machine and square-bottom paper bag machine are now sold in more than 20 provinces and cities across the country, and exported to more than 80 countries and regions such as Europe, Asia, and Africa.

The company provides customers with more than just products, as well as more comprehensive services: including technical consultation, installation and debugging, staff training for clients. My company not only manufacturing Machines , But also protecting the world.

温州锐志包装机械有限公司成立于2003年，是最早开始从事包装机械行业的领头羊之一，多年来锐志坚持走自主创新之路，不断加大创新力度，凭借专业的研发团队，借鉴德国和美国先进的设计理念与生产工艺，结合国内外的各种需求，本公司开发了多款系列的尖底纸袋机和方底纸袋机，并获得十几项国家专利，产品经浙江省质量监督检验中心全部合格，并通过省科委技术成果鉴定，各项技术指标均居国内同类产品领先水平。

现公司食品尖底纸袋机和方底纸袋机，产品畅销全国二十多个省市，并出了口欧洲，亚洲，非洲等80多个国家地区。

本公司给客户提供的不仅仅是产品，还有更全面的服：包括技术咨询，安装调试，培训操作人员。

本公司不仅仅是在生产机器，同时还在保卫世界。

Faster and more
stable for you to consider more

Our products are being assembled on the
production line at a rate of 35 units per month.
Sold all over the world, and this speed has been increasing.



我们的产品正在以每月**35**台以上的速度在生产线上组装，
销往全世界，并且这个速度一直在提升，

Staff have received the latest professional production
technology training quality control standards are used
in the production process. Fine design and precise
testing produce the most reliable products.

我们的生产人员均受过专业的最新生产技术培训。在生产
过程中采用先进的设备和严格的质量控制标准。精细的设
计和精准的测试生产出最可靠的产品。



STRONG TEAM

WE ARE YOUR MOST SUITABLE INDUSTRY CONSULTANT

我们是您最适合的行业顾问



Excellent R&D management capability

优秀的研发管理能力

We have excellent R&D and design teams, and have consultants who are engaged in management personnel for many years in the packaging industry, fully understand the current needs and problems of the packaging industry, and ensure that every type of equipment we manufacture can be recognized by customers and create more for our customers. Create greater benefits.

我们拥有优秀的研发设计团队，并有从事多年包装行业的管理人才做顾问，充分了解目前包装行业的现实需求和问题，保证了我们制造每一款设备能够得到客户的肯定，创造更大的收益。



Precise sales, think of what you think

精确销售，想你所想

By examining the current status of paper bag production at home and abroad and considering the suggestions of senior people in the printing and packaging industry, we have designed and produced a variety of matching models to suit the actual needs of different customers. Customers have a choice of flexibility and we only recommend to customers. The suitable equipment.

通过考察国内外纸袋生产的现状，综合考量印刷包装行业资深人士的建议，针对不同客户的实际需求，我们设计生产了多种配型的机型，客户选择灵活性大，我们只推荐给客户最适合他们的设备。



Perfect after sale, timely solution

完美售后，及时解决

To provide customers with comprehensive and timely after-sales service and responsible service awareness. In the face of every customer, whether it is from the maintenance, replacement of parts or the whole installation and debugging, we are wholeheartedly striving for regular communication with customers. Customer communication.

为客户提供全面及时的售后服务与负责到底的服务意识，面对每一个客户，无论是从零部件的维修，更换还是整体的安装调试，我们都全心全意争取做到让客户满意，定期的与客户沟通。

RUIZHI IS INNOVATING TECHNOLOGY

AIMING TO CHANGE LIFE

锐在创新技术 志在改变生活



PAY ATTENTION TO ENVIRONMENTAL

PROTECTION FROM PRODUCTION, PRODUCTS TO CULTURE

从生产、产品到文化都注重环保

Ruizhi Environmentally Friendly Paper Bags Have Become Your First Choice For Green Life

锐志的环保纸袋，已成为您绿色生活的首选

RZFD-250 / 330 / 450A / 450B / 550N (T)

Fully Automatic Square Bottom Paper Bag Machine
With Twisted Rope Handle Inline
全自动方底圆绳手提纸袋机




◎ 连体印刷机
Siamese Printing Presses

Main features 主要特点

1. Use France SCHNEIDER touch screen human-computer interface, making the machine easy to operate and control.
2. Adopt Germany original LENZE PC control, integrated with optical fiber. Thus ensure stable and high speed running.
3. Adopt Germany original LENZE servo motor and German original SICK photoelectric eye correction, tracking printing bag accurately.
4. Raw material loading adopts hydraulic auto-lifting structure. Unwind unit adopts auto tension control.
5. Raw material unwinding EPC adopts Italy SELECTRA, reducing material alignment time.

The Flow Chart 流程图

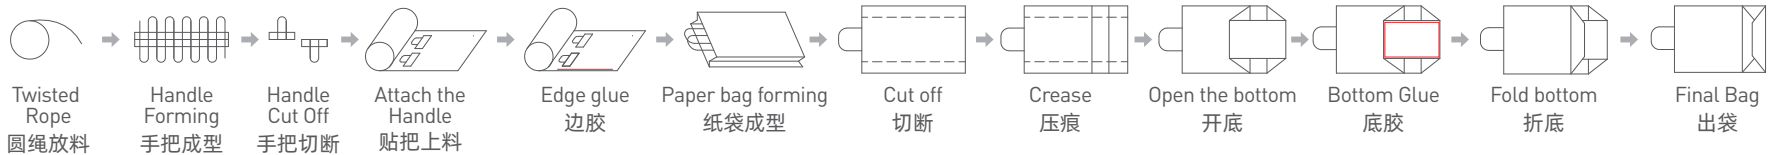

Technical parameter 技术参数


机型	Model	RZFD-250T	RZFD-330T	RZFD-450AT	RZFD-450BT	RZFD-550NT
切袋长度(C)	Cutting Length	240-370	270-430	300-530	380-660	380-660
纸袋宽度(W)	Bag Width	120-250	200-330	220-450mm	220-450	240-550
袋底宽度(H)	Bag Bottom Width	80-150	80-180	100-200mm	100-220	120-300
纸卷宽度	Paper Roll Width	430-830	590-1050	670-1370	670-1370	750-1730
纸袋厚度	Paper Bag Thickness	80-150g/m²	80-150g/m²	80-150g/m²	80-150g/m²	80-150g/m²
纸料直径	Roll Feeding Diameter	Φ1500mm	Φ1500mm	Φ1500mm	Φ1500mm	Φ1500mm
纸料内径	Feeding Inner Diameter	Φ76mm	Φ76mm	Φ76mm	Φ76mm	Φ76mm
机械速度	Machine Speed	30-220pcs/min	30-180pcs/min	30-150pcs/min	30-150pcs/min	30-130pcs/min
制袋速度	Bag Making Speed	30-180pcs/min	30-150pcs/min	30-120pcs/min	30-120pcs/min	30-110pcs/min
整机功率	Overall Power	37.3kw	41.5kw	43kw	45.5kw	54kw
整机重量	Overall Weight	16000kg	16000kg	18000kg	18000kg	23000kg
整机尺寸	Machine Dimensions	14200*5400*2500mm	13800*5500*2500mm	15300*5500*2500mm	16000*5500*2500mm	17000*5500*2500mm

圆绳手挽样式		圆绳手挽尺寸				参考样袋
	A: 贴片长度	Patch length	95mm	152mm	190mm	
	B: 贴片宽度	Patch width	40-50mm	40-50mm	40-50mm	
	F: 纸绳间距	Paper rope distance	46mm	75mm	95mm	
	D: 纸绳高度	Paper rope height	100mm	100mm	100mm	

RZFD-330 / 450A / 450B / 550N (TF)

Square Bottom Paper Bag Machine With Twisted Rope Handle And Flat Handle Inline

全自动高速方底圆扁一体纸袋机(内折定制)

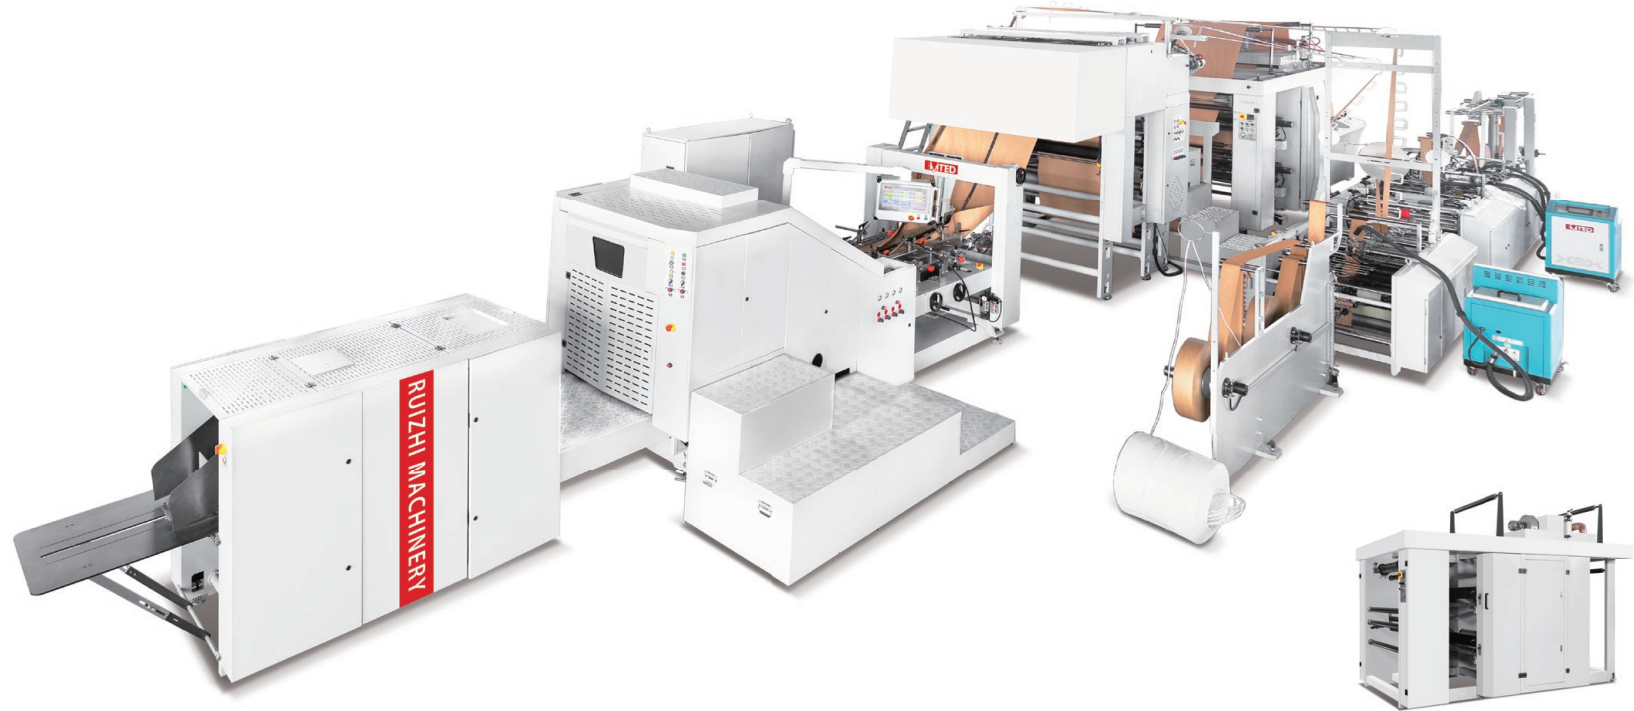


◎ 连体印刷机
Siamese Printing Presses

Main features 主要特点

- 1. Use France SCHNEIDER touch screen human-computer interface, making the machine easy to operate and control.
- 2. Adopt Germany original LENZE PC control, integrated with optical fiber. Thus ensure stable and high speed running.
- 3. Adopt Germany original LENZE servo motor and German original SICK photoelectric eye correction, tracking printing bag accurately.
- 4. Raw material loading adopts hydraulic auto-lifting structure. Unwind unit adopts auto tension control.
- 5. Raw material unwinding EPC adopts Italy SELECTRA, reducing material alignment time.





- 1.采用法国SCHNEIDER触摸屏人机界面，操作功能一目了然，便于掌控。
- 2.采用德国原装LENZE运动控制器（PC），通过与光纤一体化，保证高速运行稳定。
- 3.采用德国原装LENZE伺服电机搭配德国原装SICK光电眼修正，精确跟踪印刷袋尺寸。
- 4.原料装卸采用液压自动升降结构，放卷采用全自动恒张力控制。
- 5.原料纠偏采用意大利SELECTRA，降低纸卷对位调整时间。

The Flow Chart 流程图

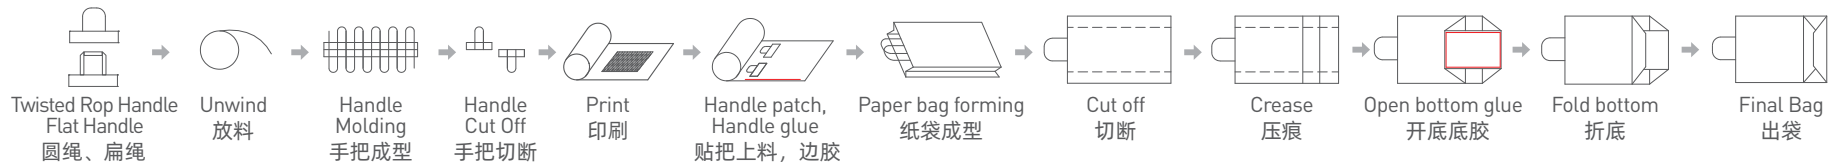



Technical parameter 技术参数

机型	Model	RZFD-330TF	RZFD-450ATF	RZFD-450BTF	RZFD-550NTF
切袋长度(C)	Cutting Length	270-430mm	300-530mm	380-660mm	380-660mm
纸袋宽度(W)	Bag Width	200-330mm	220-450mm	220-450mm	240-550mm
袋底宽度(H)	Bag Bottom Width	80-180mm	100-200mm	100-220mm	120-300mm
纸卷宽度	Paper Roll Width	370-830mm	670-1370mm	670-1370mm	750-1730mm
纸袋厚度	Paper Bag Thickness	80-150g/m²	80-150g/m²	80-150g/m²	80-150g/m²
纸料直径	Roll Feeding Diameter	Φ1500mm	Φ1500mm	Φ1500mm	Φ1500mm
纸料内径	Feeding Inner Diameter	Φ76mm	Φ76mm	Φ76mm	Φ76mm
机械速度	Machine Speed	30-180pcs/min	30-150pcs/min	30-150pcs/min	30-130pcs/min
制袋速度	Bag Making Speed	30-150pcs/min	30-120pcs/min	30-120pcs/min	30-110pcs/min
整机功率	Overall Power	41.5kw	43kw	45.5kw	54kw
整机重量	Overall Weight	19000kg	21000kg	22000kg	23000kg
整机尺寸	Machine Dimensions	13800*8000*2500mm	15300*8000*2500mm	16000*8000*2500mm	16200*8000*2500mm

圆绳手挽样式	圆绳手挽尺寸					参考样袋
	A: 贴片长度	Patch length	95mm	152mm	190mm	
	B: 贴片宽度	Patch width	40-50mm	40-50mm	40-50mm	
	F: 纸绳间距	Paper rope distance	46mm	75mm	95mm	
	D: 纸绳高度	Paper rope height	100mm	100mm	100mm	
扁绳手挽样式	扁绳手挽尺寸					参考样袋
	A: 纸绳间距	Flat handle distance	78mm	82mm		
	B: 贴片宽度	Patch width	40-50mm	40-50mm		
	F: 贴片长度	Patch length	152mm	190mm		
	D: 纸绳高度	Flat handle height	100mm	100mm		
	E: 纸绳宽度	Flat handle width	12mm	12mm		

RZFD-330 / 450A / 450B / 550N (IF)

Fully Automatic Square Bottom Paper Bag Machine
With Flat Handle And Printer Inline
全自动方底扁绳内折手提纸袋机

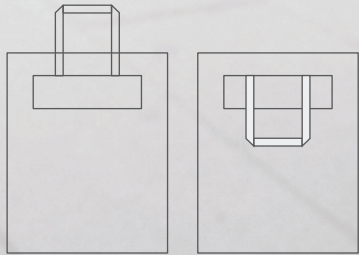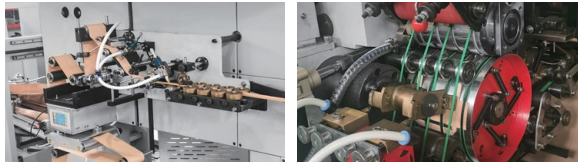


◎ 连体印刷机
Siamese Printing Presses

Main features 主要特点

1. Use France SCHNEIDER touch screen human-computer interface, making the machine easy to operate and control.
2. Adopt Germany original LENZE PC control, integrated with optical fiber. Thus ensure stable and high speed running.
3. Adopt Germany original LENZE servo motor and German original SICK photoelectric eye correction, tracking printing bag accurately.
4. Raw material loading adopts hydraulic auto-lifting structure. Unwind unit adopts auto tension control.
5. Raw material unwinding EPC adopts Italy SELECTRA, reducing material alignment time.

The Flow Chart 流程图

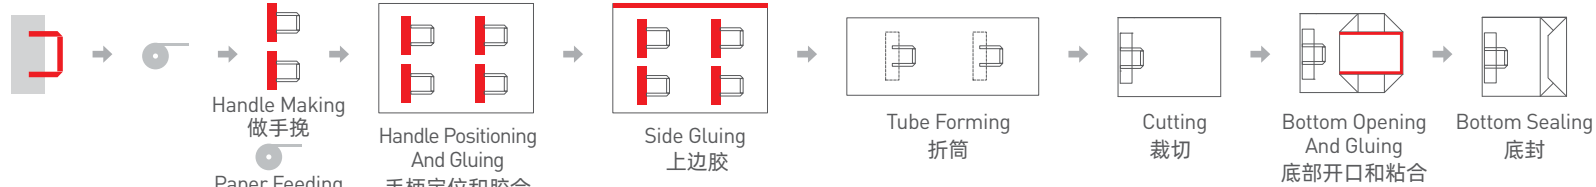

Technical parameter 技术参数

机型	Model	RZFD-330IF	RZFD-450AIF	RZFD-450BIF	RZFD-550NIF
(内折) 切袋长度(C)	(Inside Folding) Cutting Length	270-530mm	300-630mm	380-760mm	350-760mm
(内折)纸袋宽度(W)	(Inside Folding) Bag Width	220-330mm	220-450mm	220-450mm	220-550mm
(内折)袋底宽度(H)	(Inside Folding) Bag Bottom Width	80-180mm	100-200mm	100-220mm	100-300mm
纸卷宽度	Paper Roll Width	590-1050mm	670-1330mm	670-1290mm	670-1730mm
纸袋厚度	Paper Bag Thickness	80-150g/m ²	80-150g/m ²	80-150g/m ²	80-150g/m ²
纸料直径	Roll Feeding Diameter	Φ1500mm	Φ1500mm	Φ1500mm	Φ1500mm
纸料内径	Feeding Inner Diameter	Φ76mm	Φ76mm	Φ76mm	Φ76mm
机械速度	Machine Speed	30-150pcs/min	30-150pcs/min	30-150pcs/min	30-150pcs/min
制袋速度	Bag Making Speed	30-120pcs/min	30-120pcs/min	30-120pcs/min	30-100pcs/min
整机功率	Overall Power	32kw	35kw	34kw	36kw
整机重量	Overall Weight	23000kg	26000kg	25000kg	29000kg
整机尺寸	Machine Dimensions	14600*4500*3100mm	16000*4500*3100mm	16500*4700*3100mm	17000*4700*3100mm

扁绳手挽 (内折) 样式		扁绳手挽 (内折) 尺寸			参考样袋
		A: 纸绳间距	Flat handle distance	165mm	
		B: 贴片宽度	Patch width	52mm	
		F: 贴片长度	Patch length	160mm	
		D: 纸绳高度	Flat handle height	75mm	
		E: 纸绳宽度	Flat handle width	12/15/18mm	

FLAT BOTTOM PAPER BAG MACHINE **COLORFUL WORLD**

锐志尖底纸袋包装 丰富多彩的世界




OUR PRODUCTS CAN BE SEEN EVERYWHERE
AND BENEFIT YOUR LIFE

我们的产品随处可见，惠及您的生活

This Is The Charm Of Our Paper Bag Machine
这就是我们纸袋机的魅力所在

RZJD-G250J / G350J / G450J / G550J

Fully Automatic High Speed
Flat Bottom Paper Bag Machine With Window
全自动高速开窗尖底纸袋机


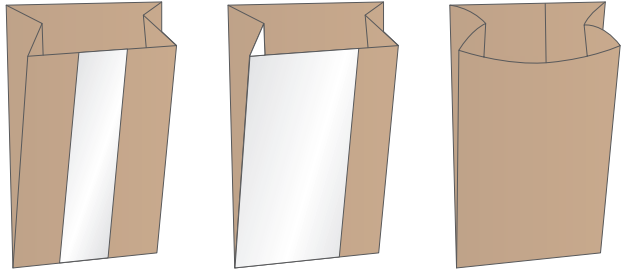


连体印刷机
Siamese Printing Presses

Main features 主要特点

1. Using the French SCHNEIDER touch screen man-machine interface, operating at a glance, easy to control.
 2. RZJD-G250J using the British TRIO Motion Controller (PC), **customized using the Germany LENZE Motion Controller (PC)**, through the integration with the optical fiber to ensure high-speed operation and stability.
 3. RZJD-G350J/G450J using the Germany LENZE Motion Controller (PC), through the integration with the optical fiber to ensure high-speed operation and stability.
 4. Using the Japanese Original YASKAWA servo motor with the German original SICK photoelectric eye correction, accurate tracking printing bag size.
 5. The raw material loading and unloading adopts the pneumatic cylinder lifting structure, the roll adopts the full automatic constant tension control.
 6. Raw materials China correction using Taiwan Pasource , reduce the roll adjustment time alignment.
1. 采用法国SCHNEIDER触摸屏人机界面，操作功能一目了然，便于掌控。
 2. RZJD-G250J采用英国TRIO运动控制器（PC），**定制型采用德国LENZE运动控制器（PC）**，通过高速总线Ether CAT，保证高速运行稳定。
 3. RZJD-G350J/G450J采用德国LENZE运动控制器（PC），通过高速总线Ether CAT，保证高速运行稳定。
 4. 采用日本原装YASKAWA 伺服电机搭配德国原装SICK光电眼修正，精确跟踪印刷袋尺寸。
 5. 原材料装卸采用气压缸升降结构，放卷采用全自动恒张力控制。
 6. 原材料纠偏采用中国台湾Pasource，降低纸卷对位调整时间。

The Flow Chart 流程图

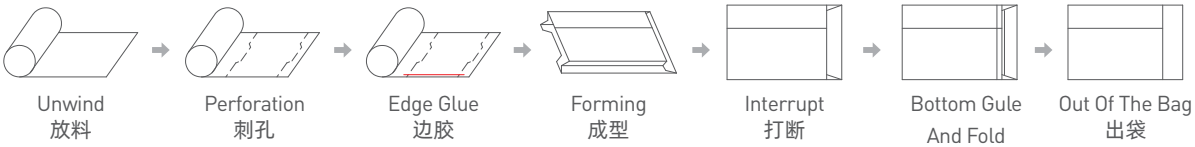


Technical parameter 技术参数

机型	Model	RZJD-G250J (定制)	RZJD-G350J	(定制)	RZJD-G450J	RZJD-G550J
切袋长度	Cutting Length	110-460mm	165-715mm	720-1520mm	165-715mm	165-715
制袋长度 (L)	Bag Length	100-450mm	160-710mm	700-1500mm	160-710mm	160-710
纸袋宽度 (W)	Bag Width	70-250mm	70-350mm	70-350mm	70-450mm	70-550
纸卷宽度	Paper Roll Width	200-760mm	200-960mm	200-960mm	245-1225mm	245-1425
纸袋厚度	Paper Bag Thickness	35-70g/m²	35-70g/m²	35-70g/m²	50-70g/m²	50-70g/m²
插边尺寸 (G)	Gusset	20-120mm	20-120mm	20-120mm	40-150mm	40-150mm
梯口高度	Bag mouth height	15/20mm	15/20mm	15/20mm	15/20mm	15/20mm
纸卷最大直径	Roll Feeding Diameter	Φ1000mm	Φ1000mm	Φ1000mm	Φ1000mm	Φ1000mm
纸卷内径	Feeding Inner Diameter	Φ76mm	Φ76mm	Φ76mm	Φ76mm	Φ76mm
制袋速度	Bag Making Speed	50-320pcs/min (50-450pcs/min)	50-650pcs/min	50-180pcs/min	50-350pcs/min	50-300pcs/min
整机功率	Overall Power	24kw	27.1kw	32kw	30kw	33kw
整机重量	Overall Weight	5400kg	6500kg	8500kg	7500kg	8000kg
整机尺寸	Machine Dimensions	6500*2800*2000mm	7000*2900*2000mm	11500*3500*2000mm	7700*3900*2000mm	8000*3900*2000mm

RZJD-G250J / G350J / G450J (2F)

Fully Automatic Flat Bottom Paper Bag Making Machine
With Printing Unit Inline (Bottom Folded Twice)

全自动高速尖底连印刷纸袋机 (双折)

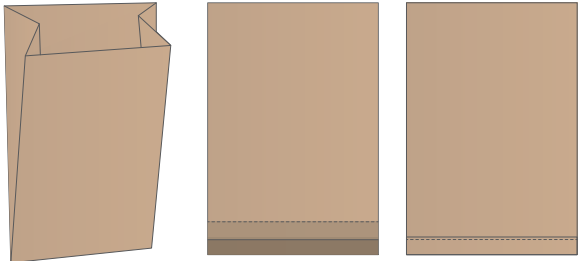


Main features 主要特点

1. Using the French SCHNEIDER touch screen man-machine interface, operating at a glance, easy to control.
2. Using the British TRIO Motion Controller (PC), through the integration with the optical fiber to ensure high-speed operation and stability.
3. Using the Japanese Original YASKAWA servo motor with the German original SICK photoelectric eye correction, accurate tracking printing bag size.
4. The raw material loading and unloading adopts the pneumatic cylinder lifting structure, the roll adopts the full automatic constant tension control.
5. Raw materials China correction using Taiwan Pasource , reduce the roll adjustment time alignment.

1. 采用法国SCHNEIDER触摸屏人机界面，操作功能一目了然，便于掌控。
2. 采用英国TRIO运动控制器（PC），通过高速总线Ether CAT，保证高速运行稳定。
3. 采用日本原装YASKAWA 伺服电机搭配德国原装SICK光电眼修正，精确跟踪印刷袋尺寸。
4. 原材料装卸采用气压缸升降结构，放卷采用全自动恒张力控制。
5. 原材料纠偏采用中国台湾Pasource，降低纸卷对位调整时间

The Flow Chart 流程图

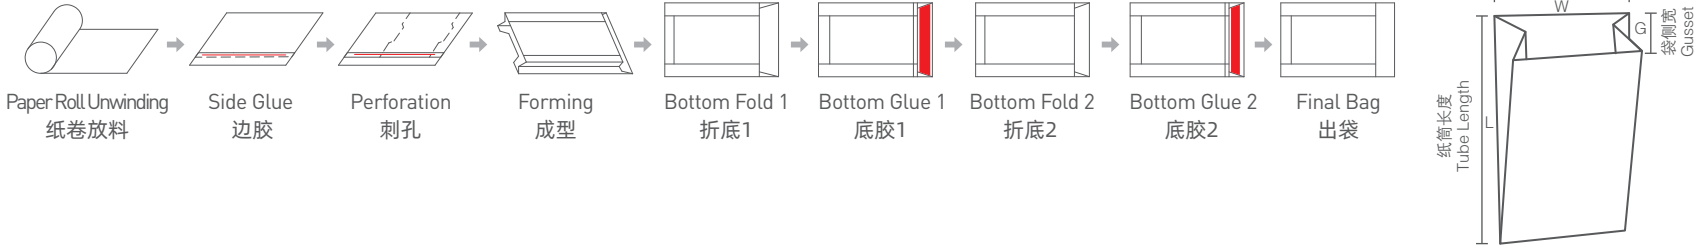


Technical parameter 技术参数

机型	Model	RZJD-G250 J (2F)	RZJD-G350 J (2F)	RZJD-G450J (2F)
切袋长度	Cutting Length	220-450mm	260-710mm	260-710mm
纸袋宽度 (W)	Bag Width	100-250mm	100-350mm	100-450mm
纸卷宽度	Paper Roll Width	280-760mm	300-1025mm	300-1225mm
纸袋厚度	Paper Bag Thickness	50-70g/m ²	50-70g/m ²	50-70g/m ²
插边尺寸 (G)	Gusset	40-120mm	40-150mm	40-150mm
梯口高度	Bag mouth height	15/20mm	15/20mm	15/20mm
纸料直径	Roll Feeding Diameter	Φ1000mm	Φ1000mm	Φ1000mm
纸料内径	Feeding Inner Diameter	Φ76mm	Φ76mm	Φ76mm
制袋速度	Bag Making Speed	20-300pcs/min	20-450pcs/min	20-300pcs/min
整机功率	Overall Power	26kw	32kw	32kw
整机重量	Overall Weight	6400kg	7000kg	8500kg
整机尺寸	Machine Dimensions	7200*2800*2100mm	7600*2800*2100mm	8000*2800*2100mm

RZJD-G250J / G350J / G450J (2PLY)

Fully Automatic High Speed
Flat Bottom Paper Bag Machine (2PLY)
全自动高速尖底双层纸袋机

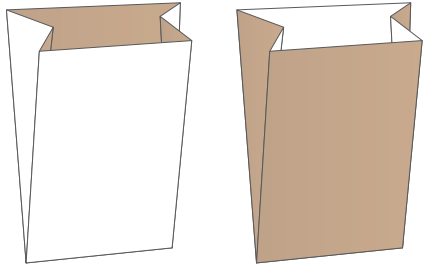



Efficient
高效



Smart
智能




Environmental
protection
环保

Main features 主要特点

1. Using the French SCHNEIDER touch screen man-machine interface, operating at a glance, easy to control.
2. RZJD-G250J using the British TRIO Motion Controller (PC), through the integration with the optical fiber to ensure high-speed operation and stability.
3. RZJD-G350J/G450J using the Germany LENZE Motion Controller (PC), through the integration with the optical fiber to ensure high-speed operation and stability.
4. Using the Japanese Original YASKAWA servo motor with the German original SICK photoelectric eye correction, accurate tracking printing bag size.
5. The raw material loading and unloading adopts the pneumatic cylinder lifting structure, the roll adopts the full automatic constant tension control.
6. Raw materials China correction using Taiwan Pasource , reduce the roll adjustment time alignment.

- 1.采用法国SCHNEIDER触摸屏人机界面，操作功能一目了然，便于掌控。
- 2.RZJD-G250J采用英国TRIO运动控制器（PC），通过高速总线Ether CAT，保证高速运行稳定。
- 3.RZJD-G350J/G450J采用德国LENZE运动控制器（PC），通过高速总线Ether CAT，保证高速运行稳定。
- 4.采用日本原装YASKAWA 伺服电机搭配德国原装SICK光电眼修正，精确跟踪印刷袋尺寸。
- 5.原材料装卸采用气压缸升降结构，放卷采用全自动恒张力控制。
- 6.原材料纠偏采用中国台湾Pasource，降低纸卷对位调整时间。

The Flow Chart 流程图

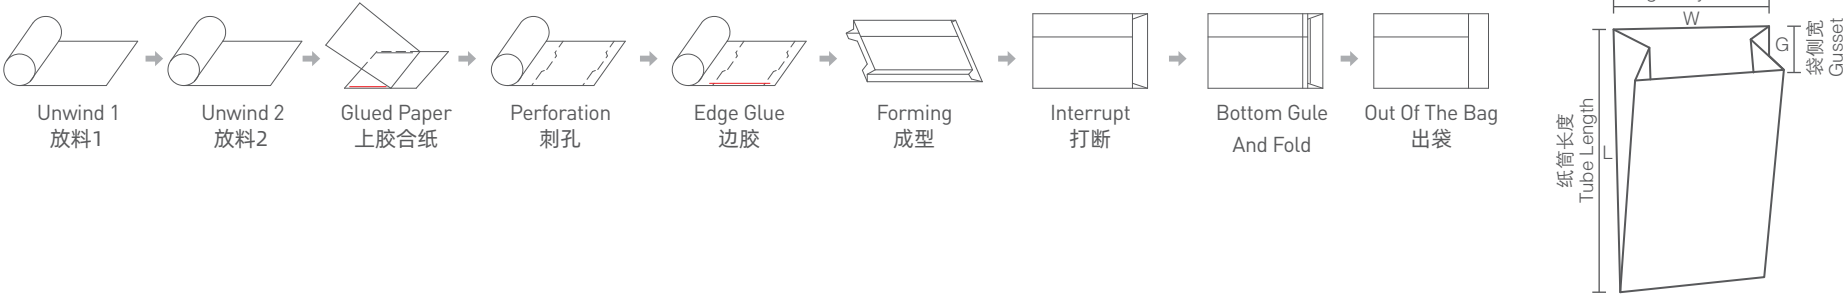

Technical parameter 技术参数

机型	Model	RZJD-G250J	RZJD-G350J	RZJD-G450J	RZJD-G550J
切袋长度	Cutting Length	110-460mm	165-715mm	165-715mm	165-715mm
制袋长度 (L)	Bag Length	100-450mm	160-710mm	160-710mm	160-710mm
纸袋宽度 (W)	Bag Width	70-250mm	70-350mm	70-450mm	70-550mm
纸卷宽度	Paper Roll Width	200-760mm	200-960mm	245-1225mm	245-1425mm
纸袋厚度	Paper Bag Thickness	35-70g/m ²	35-70g/m ²	50-70g/m ²	50-70g/m ²
(双层) 纸袋厚度	(Double layer) Paper bag thickness	不超过100g	不超过100g	不超过100g	不超过100g
插边尺寸 (G)	Gusset	20-120mm	20-120mm	40-150mm	40-150mm
梯口高度	Bag mouth height	15/20mm	15/20mm	15/20mm	15/20mm
纸卷直径	Roll Feeding Diameter	Φ1000mm	Φ1000mm	Φ1000mm	Φ1000mm
纸卷内径	Feeding Inner Diameter	Φ76mm	Φ76mm	Φ76mm	Φ76mm
制袋速度	Bag Making Speed	50-260pcs/min	50-300pcs/min	50-200pcs/min	50-200pcs/min
整机功率	Overall Power	24kw	27.1kw	30kw	33kw
整机重量	Overall Weight	5400kg	6500kg	7500kg	8500kg
整机尺寸	Machine Dimensions	6500*2800*2000mm	7000*2900*2000mm	7700*3900*2000mm	8500*3900*2000mm

CHOOSE US CHOOSE THE FUTURE

选择我们 选择未来



Our Products Can Be
Seen Everywhere In Life
我们的产品在生活中随处可见


OUR MACHINES CONTINUE TO SHOW MORE EXCITING

我们的机器不断地呈现更多的精彩


They Are Just A Small Part Of Life
它们只是生活中的一小部分

RZFD-190 / 250 / 330

Roll Fed Square Bottom Paper Bag Machine
全自动高速方底纸袋机

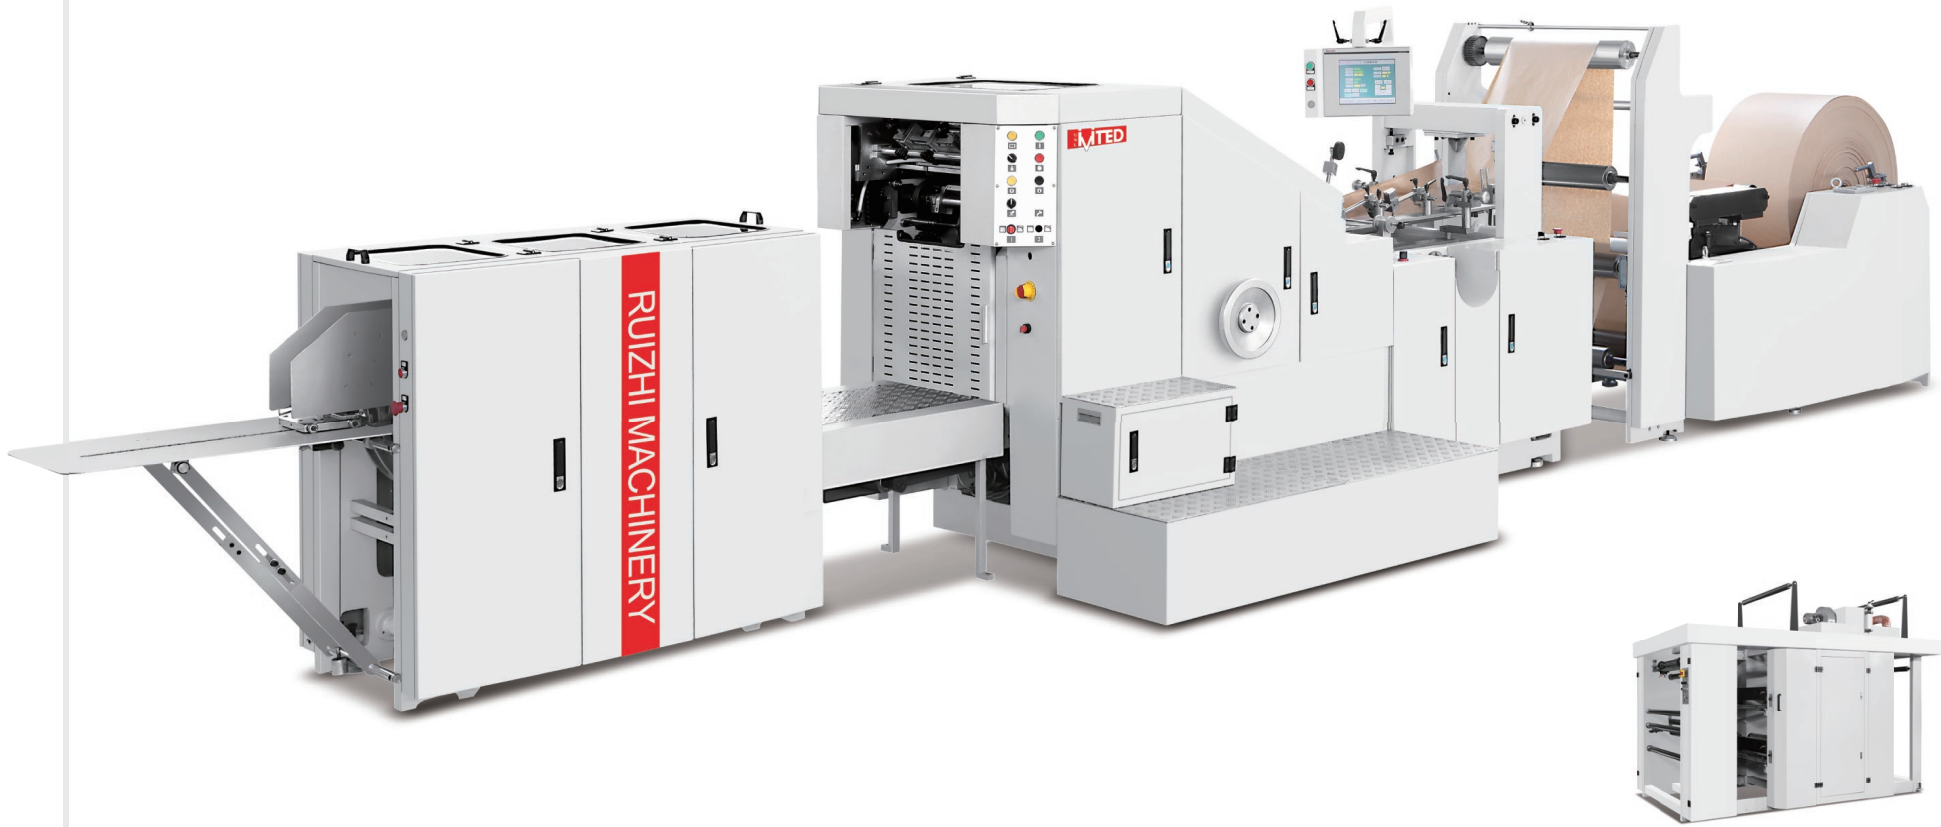

连体印刷机
Siamese Printing Presses

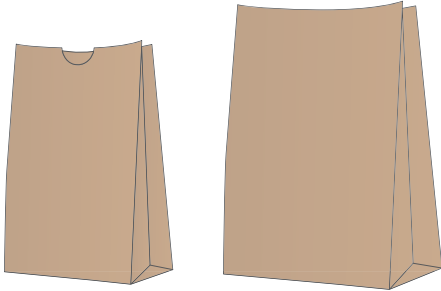

Main features 主要特点

1. Use France Schneider Touch Screen Human-Computer Interface, operate and control easily.

2. Adopt Germany Original REXROTH PC Control, integrated with optical fiber, ensure high speed running steadily.

3. Germany Original REXROTH Servo Motor and Germany Original SICK Photoelectric Eye Correction, tracking printing bag accurately.

4. Raw material load adopt Hydraulic pressure cylinder up and down structure, unwinding adopt auto tension control.

5. Raw material unwinding EPC adopt Italy SELECTRA, Reduce adjustment time.
1. 采用法国SCHNEIDER 触摸屏人机界面，操作功能一目了然，便于掌控。



2. 采用德国原装REXROTH运动控制器（PC），通过与光纤一体化，保证高速运行稳定。

3. 采用德国原装REXROTH伺服电机搭配德国原装SICK光电眼修正，精确跟踪印刷袋尺寸。

4. 原料装卸采用液压升降结构，放卷采用全自动恒张力控制。

5. 原料纠偏采用意大利SELECTRA，降低纸卷对位调整时间。

The Flow Chart 流程图





Technical parameter 技术参数

机型	Model	RZFD-190	RZFD-250	RZFD-330
切袋长度 (C)	Cutting Length	190-370mm (定制)	240-470mm	270-530mm
纸袋宽度 (W)	Bag Width	80-190mm (65-190mm)	110-250mm	120-330mm
袋底宽度 (H)	Bag Bottom Width	50-105mm (45-105mm)	60-150mm	60-180mm
纸卷宽度	Paper Roll Width	290-620mm (250-620mm)	370-830mm	390-1050mm
纸袋厚度	Paper Bag Thickness	50-130g/m²	50-150g/m²	60-150g/m²
纸料直径	Paper Roll Diameter	Φ1500mm	Φ1500mm	Φ1500mm
纸料内径	Paper Roll Inside Diameter	Φ76mm	Φ76mm	Φ76mm
机械速度	Machine Speed	30-260pcs/min	30-260pcs/min	30-220pcs/min
制袋速度	Bag Making Speed	30-220pcs/min	30-220pcs/min	30-200pcs/min
整机功率	Overall Power	11.8kw	12.1kw	15kw
整机重量	Overall Weight	6200kg	8500kg	8500kg
整机尺寸	Machine Dimensions	8200*3200*2000mm	10000*3300*2000mm	10000*4000*2200mm

RZFD-450A / 450B / 550N

Roll Fed Square Bottom Paper Bag Machine
全自动高速方底纸袋机

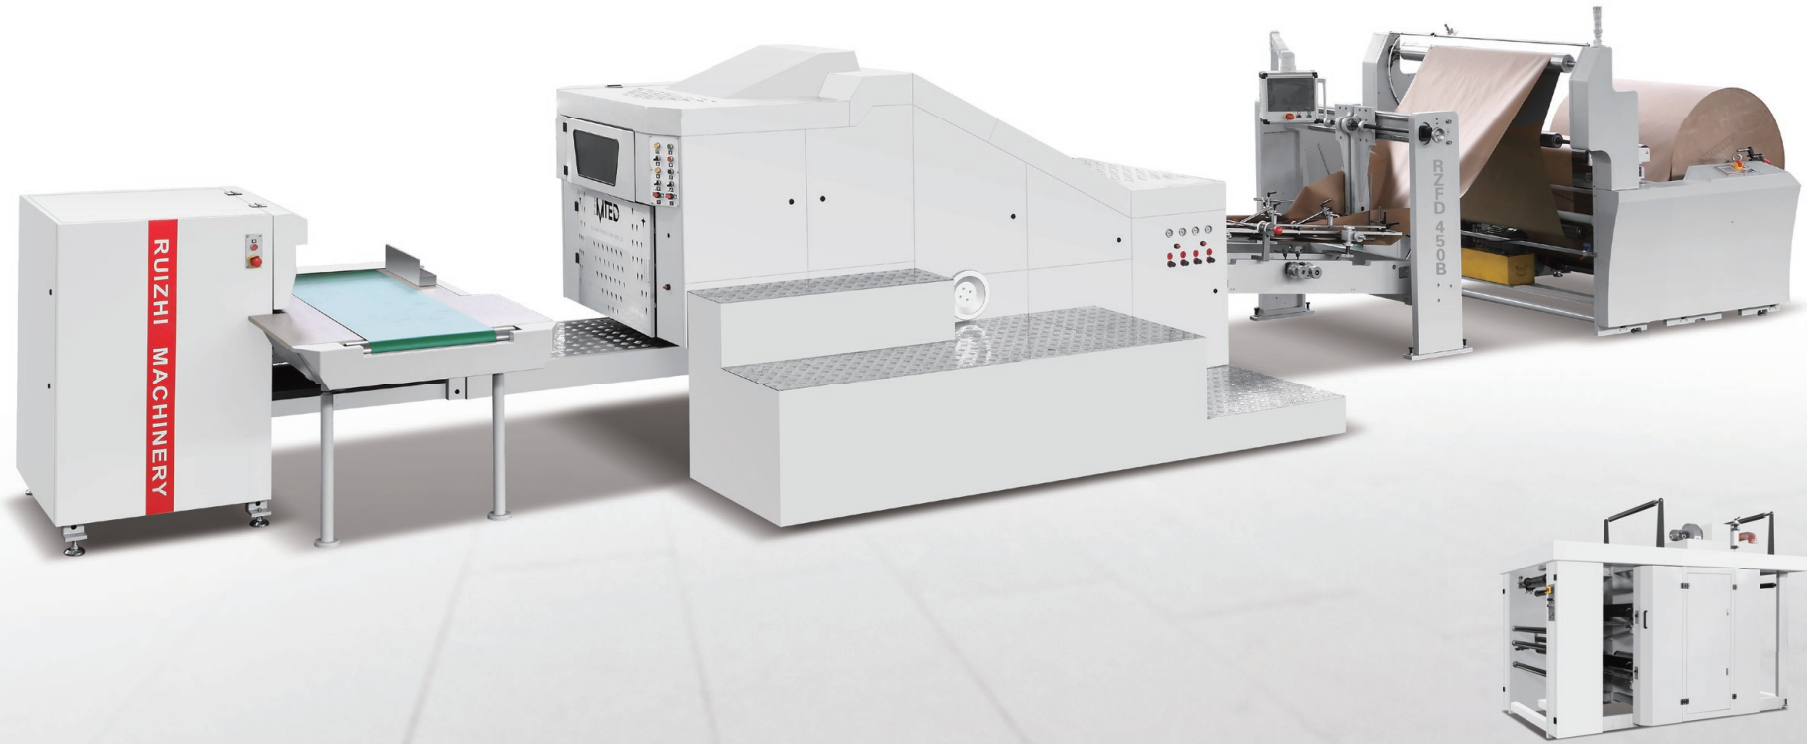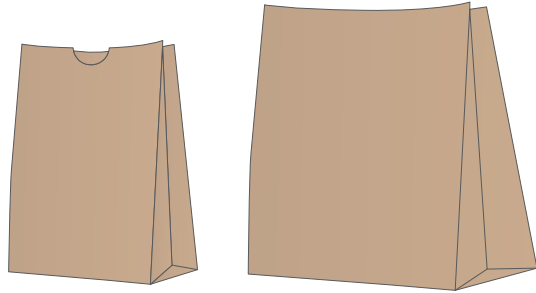



◎ 连体印刷机
Siamese Printing Presses

Main features 主要特点

- 1. Use France Schneider Touch Screen Human-Computer Interface, operate and control easily.
- 2. Adopt Germany Original REXROTH PC Control, integrated with optical fiber, ensure high speed running steadily.
- 3. Germany Original REXROTH Servo Motor and Germany Original SICK Photoelectric Eye Correction, tracking printing bag accurately.
- 4. Raw material load adopt Hydraulic pressure cylinder up and down structure, unwinding adopt auto tension control.
- 5. Raw material unwinding EPC adopt Italy SELECTRA, Reduce adjustment time.

- 1. 采用法国SCHNEIDER 触摸屏人机界面，操作功能一目了然，便于掌控。
- 2. 采用德国原装LENZE运动控制器（PC），通过与光纤一体化，保证高速运行稳定。
- 3. 采用德国原装LENZE伺服电机搭配德国原装SICK光电眼修正，精确跟踪印刷袋尺寸。
- 4. 原料装卸采用液压升降结构，放卷采用全自动恒张力控制。
- 5. 原料纠偏采用意大利SELECTRA，降低纸卷对位调整时间。

The Flow Chart 流程图




Technical parameter 技术参数

机型	Model	RZFD-450A	RZFD-450B	RZFD-550N
切袋长度 (C)	Cutting Length	300-630mm	380-760mm	380-760mm
纸袋宽度 (W)	Bag Width	220-450mm	220-450mm	240-550mm
袋底宽度 (H)	Bag Bottom Width	100-200mm	100-220mm	120-300mm
纸卷宽度	Paper Roll Width	670-1370mm	670-1370mm	670-1730mm
纸袋厚度	Paper Bag Thickness	80-150g/m²	80-150g/m²	80-150g/m²
纸料直径	Paper Roll Diameter	Φ1500mm	Φ1500mm	Φ1500mm
纸料内径	Paper Roll Inside Diameter	Φ76mm	Φ76mm	Φ76mm
机械速度	Machine Speed	30-150pcs/min	30-150pcs/min	30-130pcs/min
制袋速度	Bag Making Speed	30-120pcs/min	30-120pcs/min	30-120pcs/min
整机功率	Overall Power	15.9kw	19.7kw	18kw
整机重量	Overall Weight	12000kg	15000kg	14000kg
整机尺寸	Machine Dimensions	12600*3700*2200mm	12500*4200*2200mm	13000*6100*3400mm

RZFD-250 / 330 / 450A (W+D)

High Speed Square Bottom Paper Bag Machine
(Window+Die Cut Handle)

高速方底纸袋机（开窗+派奇袋）

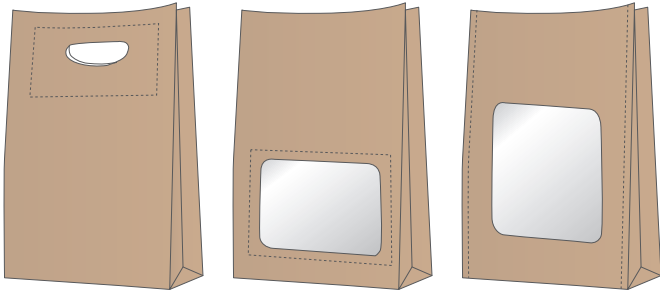



◎ 连体印刷机
Siamese Printing Presses

Main features 主要特点

- 1.Use France Schneider Touch Screen Human-Computer Interface, operate and control easily.
- 2.Adopt Germany Original REXROTH PC Control, integrated with optical fiber, ensure high speed running steadily.
3. Germany Original REXROTH Servo Motor and Germany Original SICK Photoelectric Eye Correction, tracking printing bag accurately.
- 4.Raw material load adopt hydraulic pressure up and down structure, unwinding adopt auto tension control.
- 5.Raw material unwinding EPC adopt Italy SELECTRA, Reduce adjustment time.

- 1.采用法国 SCHNEIDER触摸屏人机界面，操作功能一目了然，便于掌控。
- 2.采用德国原装LENZN运动控制器（PC），通过与光纤一体化，保证高速运行稳定。
- 3.采用德国原装REXROTH伺服电机搭配德国原装SICK光电眼修正，精确跟踪印刷袋尺寸。
- 原料装卸采用电机升降结构，放卷采用全自动恒张力控制。
- 5.原料纠偏采用意大利SELECTRA，降低纸卷对位调整时间。

The Flow Chart 流程图


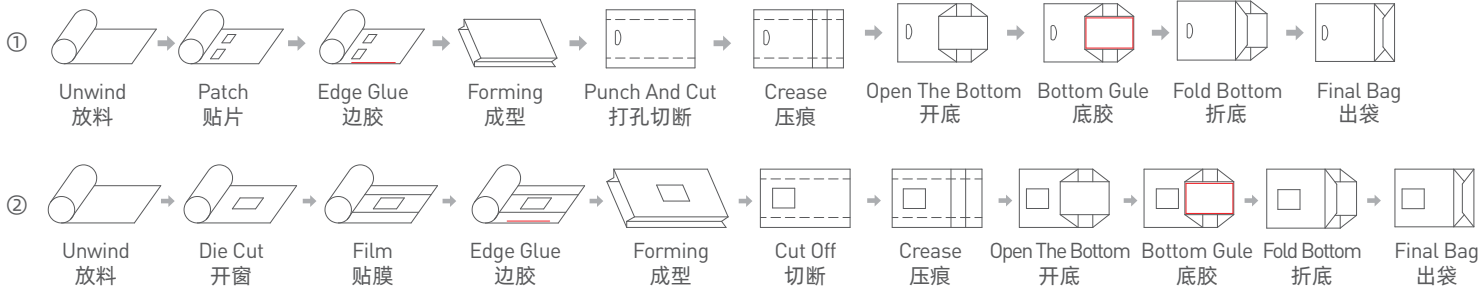


Technical parameter 技术参数

机型	Model	RZFD-250 (W+D)	RZFD-330 (W+D)	RZFD-450A(W+D)
切袋长度(C)	Cutting Length	240-470mm	270-530mm	300-630mm
纸袋宽度(W)	Bag Width	110-250mm	120-330mm	220-450mm
袋底宽度(H)	Bag Bottom Width	60-150mm	60-180mm	100-200mm
纸卷宽度	Paper Roll Width	370-830mm	390-1050mm	670-1370mm
纸袋厚度	Paper Bag Thickness	50-150g/m²	60-150g/m²	60-150g/m²
开窗宽度	Window Width	40-120mm	40-120mm	40-120mm
开窗高度	Window Height	40-120mm	40-120mm	40-120mm
派奇袋手挽孔	Patch Bag Handle Hole	75mm	75/85mm	75/85mm
派奇袋薄膜厚度	Patch Bag Film Thickness	40-70µm	40-70µm	40-70µm
派奇袋放卷宽度	Patch Bag Roll Feeding width	130mm	130mm	130mm
派奇袋放卷直径	Patch Bag Roll Feeding Diameter	Φ500mm	Φ500mm	Φ500mm
纸料直径	Roll Feeding Diameter	Φ1500mm	Φ1500mm	Φ1500mm
纸料内径	Roll Feeding Inner Diameter	Φ76mm	Φ76mm	Φ76mm
机械速度	Machine Speed	30-220pcs/min	30-220pcs/min	30-150pcs/min
制袋速度	Bag Making Speed	30-130pcs/min	30-130pcs/min	30-130pcs/min
整机功率	Overall Power	40.9kw	50.8kw	52kw
整机重量	Overall Weight	12000kg	12000kg	16000kg
整机尺寸	Machine Dimensions	15100*3700*2100mm	16100*4200*2100mm	17400*3700*2100mm

RZFD-250 / 330 / 450A / 550N (2PLY)

Square Bottom Paper Bag Making Machine (2PLY)
全自动高速方底双层纸袋机

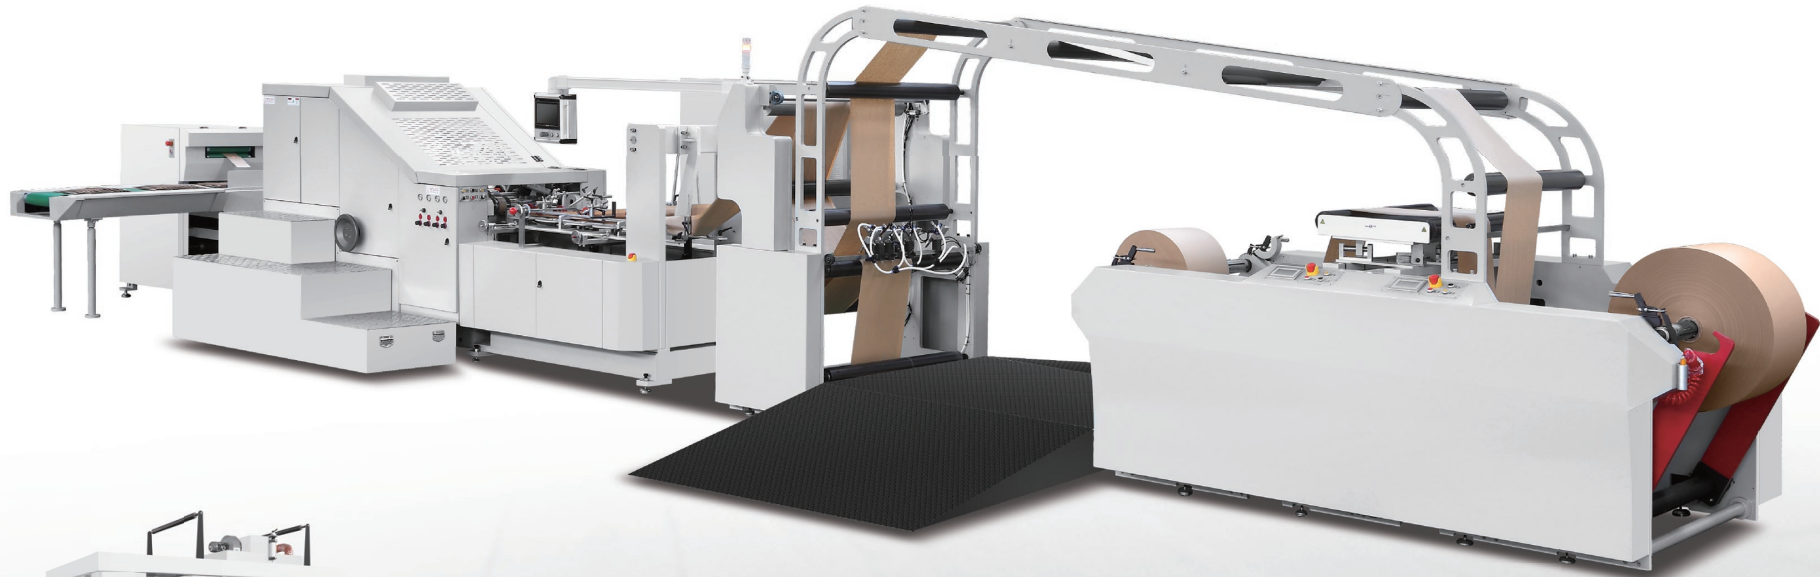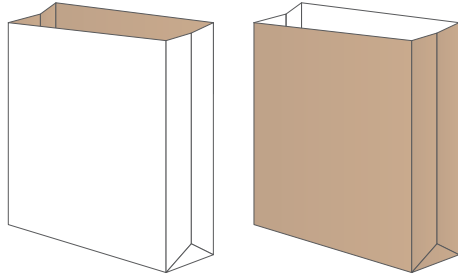



◎ 连体印刷机
Siamese Printing Presses

Main features 主要特点

- 1.Use France SCHNEIDER touch screen human-computer interface, making the machine easy to operate and control.
- 2.Adopt Germany original LENZE PC control, integrated with optical fiber. Thus ensure stable and high speed running.
- 3Automatic hole-punching adopts Germany original LENZE servo motor.
- 4.Raw material loading adopts hydraulic auto-lifting structure. Unwind unit adopts auto tension control.
- 5.Raw material unwinding EPC adopts Italy SELECTRA, reducing material alignment time.

- 1.采用法国SCHNEIDER触摸屏人机界面，操作功能一目了然，便于掌控。
- 2.采用德国原装LENZE运动控制器（PC），通过与光纤一体化，保证高速运行稳定。
- 3.采用德国原装LENZE伺服电机控制派奇袋手提自动压手提孔位。
- 4.原料装卸采用液压自动升降结构，放卷采用全自动恒张力控制。
- 5.原料纠偏采用意大利SELECTRA，降低纸卷对位调整时间。

The Flow Chart 流程图

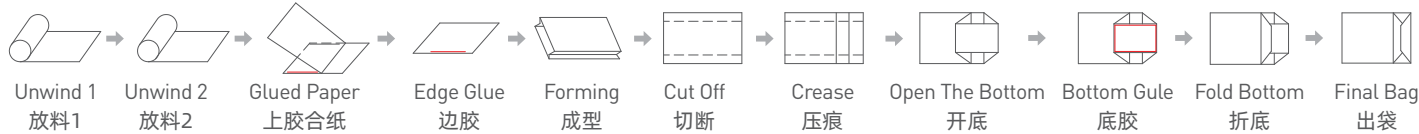

Technical parameter 技术参数

机型	Model	RZFD-250 (2PLY)	RZFD-330 (2PLY)	RZFD-450A (2PLY)	RZFD-550N (2PLY)
切袋长度(C)	Cutting Length	240-470mm	270-530mm	300-630mm	380-760mm
纸袋宽度(W)	Bag Width	110-250mm	120-330mm	220-450mm	240-550mm
袋底宽度(H)	Bag Bottom Width	60-150mm	60-180mm	100-200mm	120-300mm
纸卷宽度	Paper Roll Width	370-830mm	390-1050mm	670-1370mm	670-1730mm
纸袋厚度	Paper Roll Width	50-150g/m²	60-150g/m²	80-150g/m²	80-150g/m²
（双层）纸袋厚度	(Double layer) Paper bag thickness	不超过200g	不超过200g	不超过200g	不超过200g
纸料直径	Roll Feeding Diameter	Φ1500mm	Φ1500mm	Φ1500mm	Φ1500mm
纸料内径	Roll Feeding Inner Diameter	Φ76mm	Φ76mm	Φ76mm	Φ76mm
机械速度	Machine Speed	30-220pcs/min	30-220pcs/min	30-150pcs/min	30-130pcs/min
制袋速度	Bag Making Speed	30-180pcs/min	30-180pcs/min	30-120pcs/min	30-110pcs/min
整机功率	Overall Power	21.5kw	24.7kw	52kw	54kw
整机重量	Overall Weight	11000kg	11000kg	14000kg	17000kg
整机尺寸	Machine Dimensions	14000*3600*2400mm	13200*3600*2400mm	14700*3700*2400mm	14800*3700*2400mm

RZYS

Rzys Flexo Printing Machine With 2/4/6 Colors
2色/4色/6色分体印刷机



Technical parameter 技术参数

机型	Model	RZYS2色/4色/6色-800	RZYS2色/4色/6色-1000	RZYS2色/4色/6色-1200	RZYS2色/4色/6色-1300	RZYS2色/4色/6色-1400
最大印料宽度	Max. Printing Material Width	800mm	1000mm	1200mm	1300MM	1400MM
最大印刷宽度	Max. Printing Width	760mm	960mm	1160mm	1260MM	1360MM
印品长度范围	Printing Length Range	230-1000mm	230-1000mm	230-1000mm	230-1000mm	230-1000mm
印刷速度	Printing Speed	5-100m/min	5-100m/min	5-100m/min	5-100m/min	5-100m/min
套色精度	Register Precision	≤±0.15mm	≤±0.15mm	≤±0.15mm	≤±0.15mm	≤±0.15mm
版材厚度	Thickness Of Plate	2.28mm+0.38mm	2.28mm+0.38mm	2.28mm+0.38mm	2.28mm+0.38mm	2.28mm+0.38mm

RZ-CS1020-1450

Flexographic Printing Machine
柔版印刷机花瓣式 (Petal Type)



Main features 主要特点

- 1、Petal type plate mounting, anilox and cylinder with quick change structure.
- 2、Printing unit easy operation, cylinder and anilox pressing once successfully.
- 3、Plate full servo shaftless transmission, automatically pre-print, time saving & material saving.
- 4、Registering remains the same during lifting process.
- 5、The machine has the function of automatic presetting color.


- 1、花瓣式装版，网纹辊及版辊均为快换结构。
- 2、印刷部“傻瓜”式操作，版辊、网纹辊压合位置一次到位。
- 3、印版全伺服无轴传动，自动预套准，省时、省料。
- 4、升、降速过程中套准状况保持不变。
- 5、整机具有自动预套色功能。

Technical parameter 技术参数

机型	Model	RZ-CS1020	RZ-CS1300	RZ-CS1350	RZ-CS1450
最大纸幅宽度	Max.Web width	1020mm	1300mm	1350mm	1470mm
最大印刷宽度	Max.Printing width	1000mm	1270mm	1320mm	1450mm
印版重复长度	Printing repeat	300-1200mm	360-1200mm	360-1200mm	360-1200mm
最大放卷直径	Max.Unwinder diameter	1524mm	1524mm	1524mm	1524mm
最大收卷直径	Max.Rewinder diameter	1524mm	1524mm	1524mm	1524mm
齿轮规格	Gearing	1/8cp	1/8cp	1/8cp	1/8cp
最大速度	Max speed	240m/min	240m/min	240m/min	240m/min
导纸辊直径	Diameter of web roller	100mm	100mm	100mm	100mm
干燥方式	Drying mode	热风干燥、红外干燥、UV干燥 Hot Air Drying/IR Drying/ UV Drying			
适印材料	Substrate	80-400铜版纸，铝箔纸，BOPP，PET，卡纸，牛皮纸			
		80-400gsm Chrome Paper, Aluminum foil paper, BOPP, PET, Paper Board, Kraft paper			

RZZS-10M

High Speed Single Head
Paper Rope Machine
高速单头纸绳机

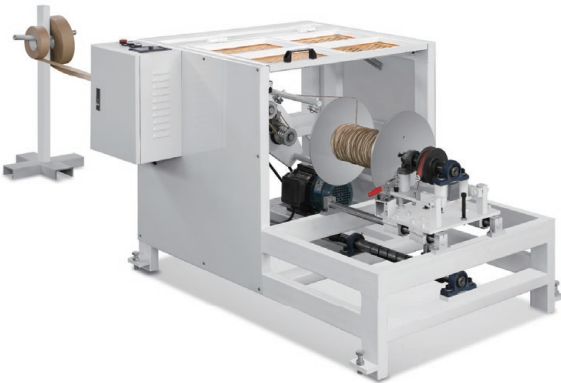

Technical parameter 技术参数

机型	Model	RZZS-10M	机型	Model	RZZS-10M
纸卷内径	Paper Roll Core Diameter	Φ76 mm(3")	最大纸绳宽度	Max. Rope Roll Width	300mm
最大纸卷外径	Max.paper Roll Diameter	400mm	生产速度	Production Speed	15-20m/min
纸卷宽度	Paper Roll Width	20-100mm	电源	Voltage	380V
原纸克重	Paper Thickness	22-60g/m²	机器功率	Overall Power	1.1KW
纸绳直径	Paper Rope Diameter	Φ2.5-6mm	机器重量	Overall Weight	Approx.200KG
绳卷内径	Rope Roll Core Diameter	Φ76 mm(3")	整机尺寸	Machine Dimensions	L1580xW1150xH930mm
最大纸绳外径	Max.rope Roll Diameter	300mm			

RZFJ-400M

Rewinding Machine
复卷机



Technical parameter 技术参数

机型	Model	RZFJ-400M
功耗	Power Dissipation	2.2KW
出绳速度	Rope Speed	80-150 M / min
纸绳直径	Rope Diameter	3-4mm
收料宽度	Material Receiving Width	400X500
机器重量	Overall Weight	100 kg
最终绳卷内径	Final Diameter Of Coil	76mm
电源	Voltage	380v
整机尺寸	Machine Size	800x800x1300mm

RZFQ-1300 / 1600

Slitting Machine
分切机




Technical parameter 技术参数

机型	Model	RZFQ-1300	RZFQ-1600
分切厚度	Slitting thickness	20g/m²~300g/m²	20g/m²~300g/m²
原料放卷最大直径	Raw material Unwinding Diameter	Φ1400mm	Φ1400mm
原料收卷最大直径	Raw rewinding max.diameter	Φ1000mm	Φ1000mm
分切原料最大宽度	Slitting Max.Width	25-1600mm	25-1600mm
收卷气胀轴直径	Rewinding air shaft diameter	Φ76mm/2pcs	Φ76mm/2pcs
分切精度	Slitting Precision	±0.2mm	±0.2mm
运行速度	Slitting Speed	50-350m/min	50-350m/min
机器功率	Overall Power	25kw	25kw
整机尺寸	Machine Dimensions	4500x2500x1850mm	4500x2800x1850mm
机器重量	Overall Weight	4500kg	5000kg

RZSW-10M

Twisted Rope Handle
Making Machine
圆绳手挽机

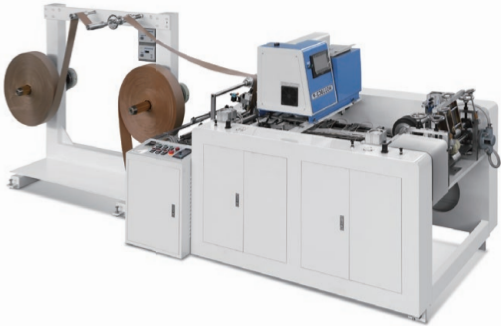


Technical parameter 技术参数

机型	Model	RZSW-10M	机型	Model	RZSW-10M
纸卷内径	Roll Internal Diameter	Φ76mm(3")	手把长度	Length Of Hand	120-150mm
最大纸卷外径	Maximum Roll Diameter	Φ1000mm	贴片宽度	Patch Width	30-50mm
生产速度	Production Speed	10000 pair/hour	贴片长度	Patch Length	190mm
电源	Voltage	380V, 3 phase 4 line	手挽中间距	Handle Middle Distance	95mm
机器功率	Overall Power	4.5kw	胶水	Glue	Hot glue
机器重量	Overall Weight	Approx. 1500kg			
整机尺寸	Machine Dimensions	L4700mm×W1300mm×H1600mm			

RZBS-180M

Flat Rope Handle
Making Machine
扁绳手挽机

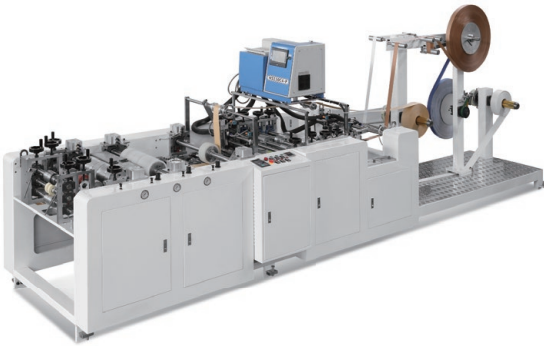

Technical parameter 技术参数

机型	Model	RZBS-180M	机型	Model	RZBS-180M
纸绳间距	Handle Spacing	83MM(规格1) 80mm/95mm(规格2)	生产速度	Production Speed	6000pairs/h
纸绳宽度	Paper Rope Width	12MM	电源	Voltage	380V
纸绳长度	Paper Rope Length	36CM	机器功率	Overall Power	10KW
原纸克重	Paper Thickness	100-120g/m²	机器重量	Overall Weight	Appox.4000kg
纸片宽度	Paper Width	40MM	整机尺寸	Machine Dimensions	L5000xW1500xH1500mm
纸片长度	Paper Length	152mm(规格1)190mm(规格2)	胶水	Glue Type	Hot-melt glue热熔胶