

QINGGONG

秦工国际

Makeronly.com
— 名客来 —

JINAN QINGONG INTERNATIONAL TRADER CO.,LTD.
SHANDONG MAKERONLY DIGITAL TECHNOLOGY CO.,LTD.

Add: Building 5,Area 3,Hanyu Golden Valley,
New Hi-tech Zone,Jinan City,Shandong Province,China.



ABOUT US

Qingong International Group is established in 2008 where located in Jinan City, the provincial capital of Shandong Province, China. The major business : heavy duty trucks and construction machinery exporting, international trade, finance investment and education, real estate.

Qingong is the official exporter of SINOTRUK, SHACMAN, FAW, and cooperates with BEIBEN, Dongfeng, FOTON, XCMG, SHANTUI, SEM, and SANY .etc, And manages the export of QINGONG products with a stable customers network and good reputation both in China and abroad countries.

As one of the leading exporters of heavy duty trucks and machinery in China, Qingong has exported the goods to more than 100 countries and the annual sales volume exceeds USD 200 million.

With the booming development of its business, since 2023, Qingong Group has established subsidiaries in Tanzania and Indonesia ,Zambia, Laos, covering the entire East Africa and Southeast Asia region.

We sincerely look forward to cooperating, growing and developing with you!





QINGONG GROUP MEMBERS

- QINGONG INTERNATIONAL GROUP CO.,LIMITED
- JINAN QINGONG MACHINERY CO.,LTD
- JINAN QINGONG INTERNATIONAL TRADE CO.,LTD
- JINAN MAKERONLY ELECTRONIC COMMERCE CO.,LTD
- SHANDONG MAKERONLY DIGITAL TECHNOLOGY CO.,LTD
- ANDA AUTO LIMITED,TANZANIA
- PT ANDA AUTO INDONESIA
- ANDA AUTO ZAMBIA LIMITED

Headquarters-Jinan, Shandong



Indonesia Branch Company

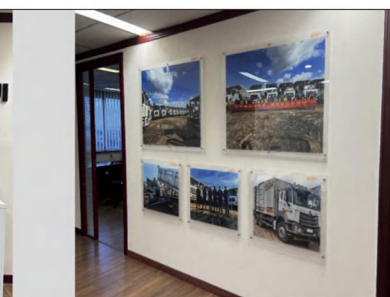

Tanzania-Zambia Branch Company





Name	SINOTRUK HOWO NX 6X4 DUMP TRUCK
Model	ZZ3257V384JB1, ZZ3257V384JB1R
Engine model	WP10.380E22, WP12.400E201
Engine power	371hp, 380hp, 400hp
Axles	Front: VGD95, Rear: HC16/ MCX16ZG/MCP16ZG
Cabin	H77L/H77L-R Type, with one bed, A/C. LHD/RHD
Gearbox	HW19710, manual,10 forward&2 reverse
Dump box	5400-5600x2300x1500mm.18-20m³ volume, 25-30T loading capacity. Thickness: floor 8mm side 6mm
Lifting type	Middle lift /Front lift
Tire	12.00R20 Radial tube tire (option 12R22.5, 315/80R22.5,13R22.5)



Name	SINOTRUK HOWO NX 8X4 DUMP TRUCK
Model	ZZ3317V386JB1, ZZ3317V386JB1R
Engine model	WP10.380E22, WP12.400E201
Engine power	371hp, 380hp, 400hp
Axles	Front: VGD95, Rear: HC16/ MCX16ZG/MCP16ZG
Cabin	H77L/H77L-R Type, with one bed, A/C. LHD/RHD
Gearbox	HW19710, manual,10 forward&2 reverse
Dump box	7300-7600x2300x1500mm. 25-30m³volume, 35-40T loading capacity. Thickness: floor 10mm side 8mm
Lifting type	Front lift(option HYVA,Permo brand)
Tire	12.00R20 Radial tube tire (option 12R22.5, 315/80R22.5,13R22.5)



Name	SINOTRUK HOWO TX 6X4 DUMP TRUCK
Model	ZZ3257V384GB1,ZZ3257V384GB1R
Engine model	WP10.380E22, WP12.400E201
Engine power	371hp, 380hp, 400hp
Axles	Front: VGD95, Rear: MCX16ZG/MCP16ZG
Cabin	TX-F Type, with one bed, A/C. LHD/RHD
Gearbox	HW19710, manual,10 forward&2 reverse
Dump box	5400-5600x2300x1500mm.18-20m³ volume, 25-30T loading capacity. Thickness: floor 8mm side 6mm
Lifting type	Middle lift /Front lift
Tire	12.00R20 Radial tube tire (option 12R22.5, 315/80R22.5,13R22.5)



Name	SINOTRUK HOWO 6X4 DUMP TRUCK
Model	ZZ3257V3847B1, ZZ3257V3847B1R
Engine model	WP10.340E22, WD615.47,WP10.380E22, WP12.400E201
Engine power	340hp,380hp,371hp,400hp
Axles	Front: VGD95, Rear: HC16/ MCX16ZG/MCP16ZG
Cabin	HW76 Type, with one bed, A/C. LHD/RHD
Gearbox	HW19710, manual,10 forward&2 reverse
Dump box	5400-5600x2300x1500mm.18-20m³ volume, 25-30T loading capacity. Thickness: floor 8mm side 6mm
Lifting type	Middle lift /Front lift
Tire	12.00R20 Radial tube tire (option 12R22.5, 315/80R22.5,13R22.5)



Name	SINOTRUK HOWO 8X4 DUMP TRUCK
Model	ZZ3317V3567B1, ZZ3317V3567B1R,ZZ3317V3867B1, ZZ3317V3867B1R
Engine model	WP10.380E22, WP12.400E201
Engine power	371hp, 380hp, 400hp
Axles	Front: VGD95, Rear: HC16/ MCX16ZG/MCP16ZG
Cabin	HW76 Type, with one bed, A/C. LHD/RHD
Gearbox	HW19710, manual,10 forward&2 reverse
Dump box	7300-7800x2300x1500mm. 25-30m³volume, 35-40T loading capacity. Thickness: floor 10mm side 8mm
Lifting type	Front lift(option HYVA,Permo brand)
Tire	12.00R20 Radial tube tire (option 12R22.5, 315/80R22.5,13R22.5)



Name	SINOTRUK HOWO 6X6 DUMP TRUCK
Model	ZZ3257V4357B1, ZZ3257V4357B1R
Engine model	WD615.47, WP10.380E22
Engine power	371hp, 380hp
Axles	Front: STR, Rear: ST16
Cabin	HW76 Type, with one bed, A/C. LHD/RHD
Gearbox	HW19710, manual,10 forward&2 reverse
Dump box	5400-5600x2300x1500mm.18-20m³ volume, 25-30T loading capacity. Thickness: floor 8mm side 6mm
Lifting type	Middle lift /Front lift
Tire	12.00R20 Radial tube tire (option 12R22.5, 315/80R22.5,13R22.5)



Name	SINOTRUK HOWO TX 8X4 DUMP TRUCK
Model	ZZ3317V356GB1, ZZ3317V356GB1R
Engine model	WP12.400E201
Engine power	371hp, 400hp
Axles	Front: VGD95, Rear: MCX16ZG/MCP16ZG
Cabin	TX-F Type, with one bed, A/C. LHD/RHD
Gearbox	HW19710, manual, 10 forward & 2 reverse
Dump box	7300-7600x2300x1500mm. 25-30m³ volume, 35-40T loading capacity. Thickness: floor 10mm side 8mm
Lifting type	Front lift (option HYVA, Permo brand)
Tire	12.00R20 Radial tube tire (option 12R22.5, 315/80R22.5, 13R22.5)



Name	SINOTRUK HOWO MINING DUMP TRUCK
Model	ZZ590HV384KB3B
Engine model	WP12.430E201
Engine power	430hp
Axles	Front: VGD95, Rear: MCK45ZG
Cabin	HW7D Type, half cabin, A/C. LHD/RHD
Gearbox	HW21712, manual, 12 forward & 2 reverse
Dump box	5800x3100x1700mm. 30m³ volume, 70T loading capacity. Thickness: floor 14mm side 12mm, high tensile/anti-worn steel
Lifting type	Front lifting system
Tire	14.00-25 / 14.00R25 mining type



Name	SINOTRUK SITRAK 8X4 DUMP TRUCK
Model	ZZ3316V306MC1
Engine model	MC11.43-30, 430hp
Axles	Front: VGD95, Rear: MCP16ZG
Cabin	G7-M Type, with one bed, A/C. LHD
Gearbox	ZF, ZF16S2230TO 16F&2R, manual
Dump box	5400-5600x2300x1500mm. 18-20m³, 25-30T loading capacity. Thickness: floor 8mm side 6mm
Lifting type	Front lift
Tire	315/80R22.5, tubeless



Name	SINOTRUK HOWO NX TRACTOR TRUCK
Model	ZZ4257V344JB1 / ZZ4257V344JB1R
Cabin	H77L, H77L-R, 2 beds with A/C
Driving type	6x4
Engine	371hp, 380hp, 400hp, 430hp
Transmission	HW19710/HW19712
Axles	Front HF7/HF9, Rear ST16/MCY13Q/HC16
Fuel tank	400L/600L
Tyre	295/80R22.5, 315/80R22.5, 12R22.5 / 12.00R20
Fifth wheel	50#/90#



Name	SINOTRUK T7H 4x2 TRACTOR TRUCK
Model	ZZ4187V391HC1
Cabin	T7H-P, Single bed with A/C
Driving type	4x2
Engine	MC11.43-30, 430hp
Transmission	HW25712XSTCL
Axles	Front VGD71S, Rear MCY13JGS
Fuel tank	600L+300L
Tyre	315/80R22.5, Tubeless
Fifth wheel	50#/90# tire



Name	SINOTRUK T7H 6x4 TRACTOR TRUCK
Model	ZZ4257V344HC1
Cabin	T7H-G, Single bed with A/C
Driving type	6x4
Engine	MC11.43-30, 430hp
Transmission	HW25712XSTCL
Axles	Front VGD71S, Rear MCY13JGS
Fuel tank	600L+300L
Tyre	315/80R22.5, Tubeless
Fifth wheel	50#/90#



Name	SINOTRUK TX 6x4 TRACTOR TRUCK
Model	ZZ4257V324GB1/ZZ4257V324GB1R
Cabin	TX-F, Single bed with A/C
Driving type	6x4
Engine	WD615.47,371hp; WP12S400E201,400hp
Transmission	HW19710/HW19712
Axles	Front VGD71S or VGD95, Rear MCY13JGS or MCX16ZG/MCP16ZG
Fuel tank	400L/ 600L
Tyre	315/80R22.5,Tubeless
Fifth wheel	50#/90#



Name	SINOTRUK SITRAK 4x2 TRACTOR TRUCK
Model	ZZ4186V391HC1B
Cabin	G7-P, Single bed with A/C
Driving type	4x2
Engine	MC11.43-30,430hp
Transmission	Manual: ZF16S2231TO, 16F&2R Automatic :ZF12TX2621 TD, 12F&2R
Axles	Front VGD71S, Rear MCY13JGS
Fuel tank	860L+400L
Tyre	315/80R22.5,Tubeless
Fifth wheel	50#



Name	SINOTRUK SITRAK 6x4 TRACTOR TRUCK(Manual)
Model	ZZ4256V364HC1B
Cabin	G7-P, Single bed with A/C
Driving type	6x4
Engine	MC11.43-30,430hp or MC13.48-30,480hp
Transmission	Manual: ZF16S2231TO, 16F&2R
Axles	Front VGD95, Rear MCP16ZG
Fuel tank	600L
Tyre	315/80R22.5,Tubeless
Fifth wheel	50#/90#



Name	SINOTRUK SITRAK 6x4 TRACTOR TRUCK(Automatic)
Model	ZZ4256V364HC1B
Cabin	G7-P, Single bed with A/C
Driving type	6x4
Engine	MC13.48-30,480hp
Transmission	ZF12TX2621 TD, 12F&2R , automatic gearbox
Axles	Front VGD71S, Rear MCY13JGS,standard loading
Fuel tank	860L+500L
Tyre	315/80R22.5,Tubeless
Fifth wheel	50#/90#



Name	SINOTRUK SITRAK 6x4 TRACTOR TRUCK(Automatic)
Model	ZZ4256V364HC1B
Cabin	G7S-E,Two beds with A/C
Driving type	6x4
Engine	MC13.48-30,480hp
Transmission	ZF12TX2621 TD, 12F&2R , automatic gearbox
Axles	Front VGD95, Rear MCP16ZG,Heavy duty loading
Fuel tank	860L+360L
Tyre	315/80R22.5,Tubeless
Fifth wheel	50#/90#



Name	SINOTRUK SITRAK 6x4 TRACTOR TRUCK(540HP)
Model	ZZ4256V384HC1B
Cabin	G7S-E,Two beds with A/C
Driving type	6x4
Engine	MC13.54-30,540hp
Transmission	ZF12TX2621 TD, 12F&2R , automatic gearbox
Axles	Front VGD71, Rear MCY13JGS,standard loading
Fuel tank	1000L+500L
Tyre	315/80R22.5,Tubeless
Fifth wheel	50#/90#



Name	SINOTRUK HOWO 4X2 WATER TANK TRUCK
Driving type	4x2
Model	ZZ1167N4617B1,ZZ1167N4617B1R
Cabin	HW76
Engine	WP10.300E22,
Axles	Front: VGD71, Rear: ST16
Tyre	11R22.5, 12R22.5, 295/80R22.5, 315/80R22.5, 12.00R20
Tank Capacity	10m³/12m³/15 m³



Name	SINOTRUK HOWO 4X2 FUEL TANK TRUCK
Driving type	4x2
Model	ZZ1167N4617B1,ZZ1167N4617B1R
Cabin	HW76
Engine	WP10.300E22,
Axles	Front: VGD71, Rear: ST16
Tyre	11R22.5, 12R22.5, 295/80R22.5, 315/80R22.5, 12.00R20
Tank Capacity	10m³/12m³/15 m³



Name	SINOTRUK HOWO 6X4 WATER TANK TRUCK
Driving type	6x4
Cabin	TX-F
Engine	340hp,371hp,380hp
Axles	VGD71/VGD95, MCX16ZG/MCP16ZG
Tyre	12R22.5, 315/80R22.5, 12.00R20
Tank Capacity	15m³/18m³/20m³/25 m³



Name	SINOTRUK HOWO 6X4 FUEL TANK TRUCK
Driving type	6x4
Cabin	HW76
Engine	340hp,380hp,400hp
Axles	VGD71/VGD95, ST16,HC16/MCX16ZG
Tyre	12R22.5, 295/80R22.5, 315/80R22.5, 11.00R20, 12.00R20
Tank Capacity	15m³/18m³/20m³/25 m³



Name	SINOTRUK HOWO NX 6X4 WATER TANK TRUCK
Driving type	6x4
Cabin	H77L, H77L-R
Engine	340hp,380hp
Axles	VGD71/VGD95, ST16,HC16/MCX16ZG
Tyre	12R22.5, 295/80R22.5, 315/80R22.5, 11.00R20, 12.00R20
Tank Capacity	15m³/18m³/20m³/25 m³



Name	SINOTRUK HOWO NX FUEL TANK TRUCK
Driving type	6x4, 8x4
Cabin	H77L, H77L-R
Engine	340hp,380hp,400hp
Axles	VGD71/VGD95, ST16,HC16/MCX16ZG
Tyre	12R22.5, 295/80R22.5, 315/80R22.5, 11.00R20, 12.00R20
Tank Capacity	20m³/25 m³/30m³



Name	SINOTRUK HOWO TRUCK MOUNTED CRANE
Driving type	6x4
Engine	340hp,380hp,400hp
Axles	Front VGD71/VGD95, Rear ST16/MCX16ZG/HC16/MCP16ZG
Tyre	295/80R22.5, 315/80R22.5, 11.00R20, 12.00R20
Crane type	XCMG brand, Straight boom, Folded boom
Crane lifting capacity	6.3T, 8T, 10T, 12T, 14T, 16T



Name	SINOTRUK HOWO CARGO TRUCK
Driving type	6x4
Engine	340hp,380hp,400hp
Axles	Front VGD71/VGD95, Rear ST16/MCX16ZG/HC16/MCP16ZG
Tyre	295/80R22.5, 315/80R22.5, 11.00R20, 12.00R20
Box type	Open flat bed, closed van type
Box length	7300mm,7600mm,8500mm,9500mm



Name	SINOTRUK HOWO MIXER TRUCK
Driving type	6x4
Model	ZZ1257V384GB1 / ZZ1257V384GB1R
Cabin	TX
Engine	380hp,400hp
Axles	VGD96, MCX16ZG/MCP16ZG
Tyre	12R22.5, 315/80R22.5, 12.00R20
Drum dimension	8m³/9m³/10m³/12m³ Italy brand Pump,motor,reduser.



Name	SINOTRUK HOWO ASPHALT DISTRIBUTOR
Driving type	4x2 or 6x4
Engine	340hp,380hp,371hp
Axles	Front VGD71/VGD95, Rear SMCX16ZG/MCP16ZG
Tyre	12R22.5, 315/80R22.5, 11.00R20, 12.00R20
Tank capacity	8000L or 12000L



Name	SINOTRUK HOWO NX MIXER TRUCK
Driving type	6x4
Model	ZZ1257V384JB1 / ZZ1257V384JB1R
Cabin	H77L/H77L-R
Engine	380hp,400hp
Axles	Front: VGD96, Rear:HC16/MCX16ZG
Tyre	12R22.5, 315/80R22.5, 12.00R20
Drum dimension	8m³/9m³/10m³ Italy brand Pump,motor,reduser.



Name	SINOTRUK HOWO CARGO TRUCK
Driving type	6x4
Engine	340hp,380hp,400hp
Axles	Front VGD71/VGD95, Rear ST16/MCX16ZG/HC16/MCP16ZG
Tyre	295/80R22.5, 315/80R22.5, 11.00R20, 12.00R20
Box type	Open flat bed, closed van type
Box length	7300mm,7600mm,8500mm,9500mm



Name	Garbage Truck-- Compressed type
Driving type	4x2, 6x4
Cabin	1880mm,2080mm, HW70,HW76
Engine	120hp,300hp,340hp,380hp
Axles	Front 3-9T, Rear 4-16T
Tyre	295/80R22.5, 315/80R22.5, 11.00R20, 12.00R20
Carriage dimension	6m³/8m³/10m³/12m³/14m³/16m³/18m³/22m



Name	Sewage Suction truck
Driving type	4x2, 6x4
Cabin	1880mm,2080mm, HW70,HW76
Engine	120hp,300hp,340hp,380hp
Axles	Front 3-9T, Rear 4-16T
Tyre	295/80R22.5, 315/80R22.5, 11.00R20, 12.00R20
Carriage dimension	3 m³/5m³/8m³/10m³/15m³/18 m³/20 m³



Name	Asphalt Synchronous Sealing Truck
Driving type	6x4, 8x4
Cabin	HW76
Engine	340hp,380hp
Axles	Front VGD71/VGD95, Rear ST16/MCX16ZG/HC16/MCP16ZG
Tyre	295/80R22.5, 315/80R22.5, 11.00R20, 12.00R20
Tank capacity	4ton/6ton/8ton/10ton/12ton



Name	LIGHT CARGO BOX TRUCK
Driving type	4x2
Cabin	1880mm/2080mm extended cab, 3 seats,1 bed,AC
Engine	90hp,110hp,116hp,120hp,140hp,160hp
Tyre	7.5-16,8.0-16,8.25-16,9.00-20,10.0-20
Carriage dimension	3850/4200/4850/5150/6250x2050x2050mm
Loading capacity	4T, 6T, 8T, 10T, 12T, 15TT



Name	LIGHT DUMP TRUCK
Driving type	4x2
Cabin	1880mm/2080mm extended cab, 3 seats,1 bed,AC
Engine	110hp,116hp,120hp,130hp,140hp,160hp
Tyre	7.5-16,8.0-16,8.25-16,9.00-20,10.0-20
Carriage dimension	3600m/3800/4200/4500x2000x600mm
Loading capacity	4T, 6T, 8T, 10T, 12T, 15TT



Name	LIGHT TANK TRUCK
Driving type	4x2
Cabin	1880mm/2080mm extended cab, 3 seats,1 bed,AC
Engine	110hp,116hp,120hp,130hp,140hp,160hp
Tyre	7.5-16,8.0-16,8.25-16,9.00-20,10.0-20
Loading medium	Fuel/Water
Loading capacity	5000L/6000L/8000L/10000L



Name	CONCRETE PUMP TRUCK
Driving type	4x2,6x4,8x4
Engine	350hp,380hp,400hp,440hp
Axles	Front VGD71/VGD95, Rear ST16/HC16/MCX16ZG/MCP16ZG
Tyre	295/80R22.5, 315/80R22.5, 11.00R20, 12.00R20
Output Capacity	60m³/h, 90m³/h,120m³/h,180m³/h
Boom length	30m, 37m,38m,43m,47m,52m,58m,62m



Name	Wrecker Truck
Driving type	4x2, 6x4, 8x4
Cabin	340hp,380hp,400hp
Engine	Front VGD71/VGD95, Rear ST16/HC16/MCX16ZG/MCP16ZG
Axles	295/80R22.5, 315/80R22.5, 11.00R20, 12.00R20
Tyre	295/80R22.5, 315/80R22.5, 11.00R20, 12.00R20
Hoisting/ Loading capacity	5ton, 8tons, 9ton, 10ton, 14ton,16ton



Name	Fire truck
Driving type	4x2, 6x4, 8x4
Cabin	HW76,extended type
Engine	340hp,380hp,400hp
Axles	Front VGD71/VGD95, Rear ST16/HC16/MCX16ZG/MCP16ZG
Tyre	295/80R22.5, 315/80R22.5, 11.00R20, 12.00R20
Carriage dimension	3 m³/5m³/10m³/12m³/16 m³/20 m³



Name	SINOTRUK HOWO 6X4 BULK CEMENT TANK TRUCK
Driving type	6x4, 8x4
Cabin	HW76, one bed,A/C
Engine	340hp,371hp,380hp,400hp
Axles	VGD71/VGD95, ST16,HC16/MCX16ZG
Tyre	12R22.5, 295/80R22.5, 315/80R22.5, 11.00R20, 12.00R20
Tank Capacity	30m³/35m³



Name	SINOTRUK MIXER TRUCK-Light duty
Driving type	4x2
Cabin	2080mm
Engine	160hp,220hp
Axles	Front 2-5T, Rear 6-10T
Tyre	8.25R16,8.25R20,9.00R20,10.00R20
Tank Capacity	4m³/6m³



Name	Road Sweeper Truck
Driving type	4x2
Cabin	1880mm,2080mm
Engine	116hp,120hp
Axles	Front 2-5T, Rear 6-10T
Tyre	8.25R16,8.25R20,9.00R20
Tank Capacity	5m³/6m³



Name	Bulk Cement Tank Semi Trailer
Whole Dimension	10100*2500*3990mm
Tank capacity	35m ³ –50m ³
Diesel engine & Air compressor	4102 diesel engine & 12m ³ / min air compressor
Axle	3 axles, 13T/16T loading capacity
Suspension	Mechanical suspension (Germany Type or America Type)
Tyre	12R22.5, 315/80R22.5, 11.00R20, 12.00R20



Name	Fuel Tank Semi Trailer
Whole Dimension	12500x2500x3950mm
Tank capacity	35m ³ –55m ³
Material	Carbon steel,aluminum alloy,stainless steel
Axle	3 axles, 13T/16T loading capacity
Suspension	Mechanical suspension (Germany Type or America Type)
Tyre	12R22.5, 315/80R22.5, 11.00R20, 12.00R20



Name	Side Wall Cargo Semi Trailer
Whole Dimension	13000mm*2490mm*2860mm
Side Wall Height	600–1200mm
Loading Capacity	40 ton
Axle	3 axles, 13T axle, FUWA /BPW /Huajin Brand
Suspension	Mechanical suspension (Germany Type or America Type)
Tyre	12R22.5, 315/80R22.5, 11.00R20, 12.00R20



Name	Container Semi Trailer
Whole Dimension	12500x2500x1650mm
Loading Capacity	40 ton
Container Type	1 x 20 feet / 2 x 20 feet / 1 x 40 feet
Axle	3 axles, 13T loading capacity
Suspension	Mechanical spring suspension / Air suspension
Tyre	11R22.5, 12R22.5, 295/80R22.5, 315/80R22.5, 11.00R20, 12.00R20



Name	Low Bed Semi Trailer
Whole Dimension	13000mm*3000mm*1650mm
Loading Capacity	60 ton
Main Beam	Height: 500mm, upper plate 20mm, middle plate 12mm, lower plate 22mm
Axle	3 axles, 13T/16T loading capacity
Suspension	Mechanical suspension (Germany Type or America Type)
Tyre	12R22.5, 315/80R22.5, 11.00R20, 12.00R20



Name	Dumper Semi Trailer
Whole Dimension	10200x2700x3560mm
Dumper dimension	9000x2500x1600mm
Loading Capacity	50 ton
Axle	3 axles, 13T/16T loading capacity
Suspension	Mechanical suspension (Germany Type or America Type)
Tyre	12R22.5, 315/80R22.5, 11.00R20, 12.00R20,13R22.5



MODEL	SHACMAN F3000 6X4 TRACTOR TRUCK
ENGINE	WEICHAI WP12.430E201, 430hp. EURO-II (option: Cummins Engine)
TRANSMISSION	FAST 12JSD200T-B, 12F&2R, MANUAL
AXLES	MAN Axles. Front 7.5T/9T, Rear 13T /16T
CABIN	F3000 Flat Roof Cabin with A/C, one sleeper (option high roof cabin with two sleepers)
TIRE	12.00R20 Radial tube tire (option 12R22.5, 315/80R22.5)
FUEL TANK	600L Aluminum alloy tank(double tanks with big volume for option)
FIFTH WHEEL	90# OR 50#
OTHERS	Overall size: 6850x2550x3650mm; Curb weight: 8000kg



MODEL	SHACMAN H3000 6X4 TRACTOR TRUCK
ENGINE	WEICHAI WP12.400E201, 430hp. EURO-II (option: Cummins Engine)
TRANSMISSION	FAST 12JSD200T-B, 12F&2R, MANUAL
AXLES	MAN Axles. Front 7.5T/9T, Rear 13T /16T
CABIN	H3000 Flat Roof Cabin with A/C, one sleeper (option high roof cabin with two sleepers)
TIRE	12R22.5 Tubeless tire (option 12.00R20, 315/80R22.5) with spare tire
FUEL TANK	600L Aluminum alloy tank(double tanks with big volume for option)
FIFTH WHEEL	90# OR 50#
OTHERS	Overall size: 6850x2550x3650mm; Curb weight: 8000kg



MODEL	SHACMAN X3000 6X4 TRACTOR TRUCK
ENGINE	CUMMINS ISME420-30, 420hp. EURO-III (option: WEICHAI Engine)
TRANSMISSION	FAST 12JSD200T-B, 12F&2R, MANUAL
AXLES	MAN Axles. Front 7.5T/9T, Rear 13T /16T
CABIN	X3000 High Roof Cabin with A/C, two sleeper(option flat roof cabin)
TIRE	315/80R22.5 Tubeless tire(option 12.00R20) with spare tire
FUEL TANK	600L Aluminum alloy tank(double tanks with big volume for option)
FIFTH WHEEL	90# OR 50#
OTHERS	Overall size: 6850x2550x3650mm; Curb weight: 8800kg



MODEL	SHACMAN X5000 6X4 TRACTOR TRUCK
ENGINE	CUMMINS ISZ480-51, 480hp. EURO-V / EURO-III With JACOB
TRANSMISSION	FAST 16JSDX240TA +QH50PTO + FHB400 Retarder , Manual (Option SF16JZ240A, AMT Auto-gearbox)
AXLES	MAN Axles. Front 7.5T/9T, Rear 13T /16T Suspension: front steel spring + rear Air-bag suspension + ECAS
CABIN	X5000 High Roof Cabin with A/C, two sleeper (option flat roof cabin with one sleeper)
TIRE	11R22.5 Tubeless tire (option 12.00R20, 315/80R22.5) with spare tire
FUEL TANK	700L+300L double Aluminum alloy tank
FIFTH WHEEL	90# OR 50# , JOST
OTHERS	Overall size: 6850x2550x3650mm; Curb weight: 8000kg WABCO 4-WAYS ABS,



MODEL	SHACMAN H3000 4X2 TRACTOR TRUCK
ENGINE	WEICHAI WP10.380E22, 380hp. EURO-II (option: Cummins Engine)
TRANSMISSION	FAST 10JSD180, 10F&2R, MANUAL
AXLES	MAN Axles. Front 7.5T/9T, Rear 13T /16T
CABIN	H3000 Flat Roof Cabin with A/C, one sleeper (option high roof cabin with two sleepers)
TIRE	12R22.5 Tubeless tire (option 12.00R20, 315/80R22.5) with spare tire
FUEL TANK	400L Aluminum alloy tank (600L volume for option)
FIFTH WHEEL	90# OR 50#
OTHERS	Overall size: 6250x2550x3650mm; Curb weight: 7500kg



MODEL	SHACMAN X5000 6X4 TRACTOR TRUCK (CNG)
ENGINE	WEICHAI WP13NG460E61, 460hp , EURO-VI
TRANSMISSION	FAST 16JSDX240TA +QH50PTO + FHB400 Retarder , Manual (Option SF16JZ240A, AMT Auto-gearbox)
AXLES	MAN Axles. Front 7.5T, Rear 11.5 T Suspension: front steel spring + rear Air-bag suspension + ECAS
CABIN	X5000 High Roof Cabin with A/C, two sleeper (option flat roof cabin with one sleeper)
TIRE	Front 12R22.5 + Rear 425/65R22.5, with spare tire12R22.5.
CNG TANK	1350L CNG TANK (rear)
FIFTH WHEEL	90# OR 50# , JOST
OTHERS	Overall size: 6850x2550x3650mm; Curb weight: 8000kg WABCO 4-WAYS EBS+ESC, ASR, Aluminum Alloy Rim.



MODEL	SHACMAN H3000 6X4 DUMP TRUCK
ENGINE	WEICHAI WP10.380E22, 380hp. EURO-II (option: WEICHAI 400HP, Or CUMMINS ENGINE)
TRANSMISSION	FAST 10JSD180 + QH50PTO, 10F&2R, MANUAL
AXLES	MAN Axles. Front 9.5T, Rear 2*16T, ratio 5.92
CABIN	H3000 Standard Cabin with A/C, hydraulic / air bag driver seat.
TIRE	12.00R20 Radial tube tire (option 13R22.5, 315/80R22.5)
FUEL TANK	300L Aluminum alloy tank(option 400L aluminum alloy or 380L iron)
BODY SIZE	5400/5600*2300*1500mm, 18-20m ³ volume. load 25-30T front lift cylinder or middle lift cylinder
OTHERS	Overall size: 8500x2500x3450mm; Curb weight: 15000kg



MODEL	SHACMAN F3000 6X4 DUMP TRUCK
ENGINE	WEICHAI WP10.340E22, 340hp. EURO-II (option: WEICHAI 380HP/400HP, Or CUMMINS ENGINE)
TRANSMISSION	FAST 10JSD180 + QH50PTO, 10F&2R, MANUAL
AXLES	MAN Axles. Front 9.5T, Rear 2*16T, ratio 5.92
CABIN	F3000 Flat roof Cabin with A/C, one sleeper.
TIRE	12.00R20 Radial tube tire (option 13R22.5, 315/80R22.5)
FUEL TANK	300L Aluminum alloy tank(option 400L aluminum alloy or 380L iron)
BODY SIZE	5400/5600*2300*1500mm, 18-20m ³ volume. load 25-30T front lift cylinder or middle lift cylinder
OTHERS	Overall size: 8500x2500x3450mm; Curb weight: 15000kg



MODEL	SHACMAN X3000 6X4 DUMP TRUCK
ENGINE	CUMMINS ISME-385, 385hp, EURO-III (option: WEICHAI 380HP/400HP)
TRANSMISSION	FAST 10JSD180 + QH50PTO, 10F&2R, MANUAL
AXLES	MAN Axles. Front 9.5T, Rear 2*16T, ratio 5.92
CABIN	X3000 Flat roof Cabin with A/C, one sleeper.
TIRE	12.00R20 Radial tube tire(option 13R22.5, 315/80R22.5, 12.00R24)
FUEL TANK	400L Aluminum alloy tank
BODY SIZE	5600*2300*1500mm, 20m ³ volume. load 25-30T front lift cylinder or middle lift cylinder
OTHERS	Overall size: 8500x2500x3450mm; Curb weight: 15000kg



MODEL	SHACMAN F3000 8X4 DUMP TRUCK
ENGINE	WEICHAI WP12.400E201, 400hp. EURO-II (option: WEICHAI 380HP/430HP, Or CUMMINS ENGINE)
TRANSMISSION	FAST 10JSD180 + QH50PTO, 10F&2R, MANUAL
AXLES	MAN Axles. Front+Middle 9.5T, Rear 2*16T, ratio 5.262
CABIN	F3000 Flat roof Cabin with A/C, one sleeper.
TIRE	12.00R20 Radial tube tire (option 13R22.5, 315/80R22.5)
FUEL TANK	400L Iron tank (option 400L aluminum alloy)
BODY SIZE	7600/7800*2300*1500mm, 25-30m ³ volume. load 40-50T HYVA front lift cylinder
OTHERS	Overall size: 11500x2500x3450mm; Curb weight: 17000kg



MODEL	SHACMAN X3000 8X4 DUMP TRUCK
ENGINE	CUMMINS ISM11E5-440, 440hp, EURO-V, With JACOB (CUMMINS 520hp option)
TRANSMISSION	FAST 12JSD200T-B + QH50PTO, 12F&2R, MANUAL (Option Retarder)
AXLES	MAN Axles. Front & Middle 9.5T, Rear 2*16T, ratio 5.262
CABIN	X3000 Flat roof Cabin with A/C, one sleeper.
TIRE	12.00R24 Radial tire, Pattern TR668+TR918 (option 12.00R20)
FUEL TANK	400L Aluminum alloy tank
BODY SIZE	6500*2300*1500mm, 25m ³ volume. load 40T HYVA front lift cylinder (HARDOX steel option)
OTHERS	Overall size: 11000x2500x3450mm; Curb weight: 16000kg



MODEL	SHACMAN X5000 8X4 DUMP TRUCK
ENGINE	CUMMINS ISZ520-51, 520hp, EURO-V, With JACOB
TRANSMISSION	FAST 12JSDX240TB + QH50PTO + FHB400 retarder, 12F&2R, MANUAL
AXLES	MAN Axles. Front & Middle 9.5T, Rear 2*16T, ratio 5.262
CABIN	X3000 Flat roof Cabin with A/C, one sleeper.
TIRE	12.00R24 Radial tire, Pattern TR668+TR918 (option 12.00R20)
FUEL TANK	400L Aluminum alloy tank
BODY SIZE	6500*2300*1600mm, 25m ³ volume. load 40T HYVA front lift cylinder (HARDOX steel option)
OTHERS	Overall size: 11000x2500x3450mm; Curb weight: 16000kg



MODEL	SHACMAN H3000 6X4 CONCRETE MIXER TRUCK , 8M3
ENGINE	WEICHAI WP10.340E22, 340hp. EURO-II (option: WEICHAI 380HP, Or CUMMINS ENGINE)
TRANSMISSION	FAST 10JSD180 + QH50PTO, 10F&2R, MANUAL
AXLES	MAN Axles. Front 9.5T, Rear 2*16T, ratio 5.92
CABIN	H3000 Flat roof Cabin with A/C, one sleeper.
TIRE	12.00R20 Radial tube tire (option 13R22.5, 315/80R22.5)
FUEL TANK	300L Aluminum alloy tank (option 400L aluminum alloy or 380L iron)
Mixer tank	8m3 volume, with Italy AKB/EATON/PMP motor, pump and reduction. (HARDOX steel option)
OTHERS	Overall size: 8950x2500x4000mm; Curb weight: 15000kg



MODEL	SHACMAN F3000 6X4 CONCRETE MIXER TRUCK , 9m3/10m3
ENGINE	WEICHAI WP10.340E22, 340hp. EURO-II (option: WEICHAI 380HP, Or CUMMINS ENGINE)
TRANSMISSION	FAST 10JSD180 + QH50PTO, 10F&2R, MANUAL
AXLES	MAN Axles. Front 9.5T, Rear 2*16T, ratio 5.92
CABIN	F3000 Flat roof Cabin with A/C, one sleeper.
TIRE	12.00R20 Radial tube tire (option 13R22.5, 315/80R22.5)
FUEL TANK	400L Aluminum alloy tank
Mixer tank	9m3 or 10m3 volume, with Italy AKB/EATON/PMP motor, pump and reduction. (HARDOX steel option)
OTHERS	Overall size: 8950x2500x4000mm; Curb weight: 15000k



MODEL	SHACMAN X3000 8X4 CONCRETE MIXER TRUCK , 12m3
ENGINE	WEICHAI WP10.380E22, 380hp. EURO-II (option: CUMMINS ENGINE)
TRANSMISSION	FAST 10JSD180 + QH50PTO, 10F&2R, MANUAL
AXLES	MAN Axles. Front 9.5T, Rear 2*16T, ratio 5.92
CABIN	F3000 Flat roof Cabin with A/C, one sleeper.
TIRE	12.00R20 Radial tube tire (option 13R22.5, 315/80R22.5)
FUEL TANK	400L Aluminum alloy tank
Mixer tank	12m3 volume, with Italy AKB/EATON/PMP motor, pump and reduction. (HARDOX steel option)
OTHERS	Overall size: 10000x2500x4000mm; Curb weight: 17000kg



MODEL	SHACMAN L3000 4X2 CARGO TRUCK
ENGINE	WEICHAI WP6.240E32, 240hp. EURO-II (option: CUMMINS ENGINE 210hp or 245hp)
TRANSMISSION	FAST 8JS85TM , 8F&1R, MANUAL
AXLES	MAN Axles. Front 4.8T, Rear 10T, ratio 4.625
CABIN	L3000 Standard Cabin with A/C.
TIRE	10.00R20 Radial tube tire
FUEL TANK	200L Iron tank
CARGO BOX	6750/7750*2450*600/800 MM
OTHERS	Overall size: 9500x2500x3400mm; Curb weight: 10000kg



MODEL	SHACMAN F3000 6X4 CARGO-CONTAINER TRUCK
ENGINE	WEICHAI WP10.340E32, 340hp. EURO-II (option: WEICHAI 380HP OR CUMMINS ENGINE)
TRANSMISSION	FAST 10JSD180 , 10F&2R, MANUAL
AXLES	MAN Axles. Front 7.5T/9.5T, Rear 13T/16T, ratio 4.769
CABIN	F3000 Flatroof Cabin with A/C. one sleeper.
TIRE	12.00R20 Radial tube tire (option: 12R22.5 , 315/80R22.5)
FUEL TANK	400L Aluminum alloy tank
BOX	9300*2450* 2200 mm
OTHERS	Overall size: 12000x2500x4000mm; Curb weight: 13000kg



MODEL	SHACMAN X3000 8X4 CARGO-CONTAINER TRUCK
ENGINE	WEICHAI WP10.380E22, 380hp. EURO-II (option: WEICHAI 400HP OR CUMMINS ENGINE)
TRANSMISSION	FAST 10JSD180 , 10F&2R, MANUAL
AXLES	MAN Axles. Front 7.5T/9.5T, Rear 13T/16T, ratio 4.769
CABIN	X3000 Flatroof Cabin with A/C. one sleeper.
TIRE	12.00R20 Radial tube tire (option: 12R22.5 , 315/80R22.5)
FUEL TANK	400L Aluminum alloy tank
CARGO-GRID BOX	9500*2450* 2000 mm (800mm board+1200mm grid)
OTHERS	Overall size: 12000x2500x4000mm; Curb weight: 13000kg



MODEL	SHACMAN F3000 6X4 WATER TANK TRUCK 20000L
ENGINE	WEICHAI WP10.340E32, 340hp. EURO-II (option: WEICHAI 380HP OR CUMMINS ENGINE)
TRANSMISSION	FAST 10JSD180 , 10F&2R, MANUAL
AXLES	MAN Axles. Front 7.5T/9.5T, Rear 13T/16T, ratio 4.769
CABIN	F3000 Flatroof Cabin with A/C. one sleeper
TIRE	12.00R20 Radial tube tire (option: 12R22.5 , 315/80R22.5)
FUEL TANK	400L Aluminum alloy tank
WATER TANK	20000L Volume, tanker body thickness 5mm, end 6mm, with water pump, front and rear sprayer, side discharger, with tail platform and water sprinkler.
OTHERS	Overall size: 10500x2500x3400mm; Curb weight: 13000kg



MODEL	SHACMAN H3000 6X4 FUEL TANK TRUCK 20000L
ENGINE	WEICHAI WP10.300E22, 300hp. EURO-II (option: WEICHAI 340HP, 380HP OR CUMMINS ENGINE)
TRANSMISSION	FAST RTD11509C , 9F&1R, MANUAL
AXLES	MAN Axles. Front 7.5T/9.5T, Rear 13T/16T, ratio 5.262
CABIN	F3000 Flatroof Cabin with A/C. one sleeper
TIRE	12.00R20 Radial tube tire (option: 12R22.5 , 315/80R22.5)
DIESEL TANK	400L Aluminum alloy tank
FUEL TANK	20000L Volume, tanker body thickness 5mm, end 6mm, with fuel pump, two European standard Manholes, with bottom valve, with filling counter, 15m reel and injection nozzle.
OTHERS	Overall size: 10500x2500x3400mm; Curb weight: 13000kg



MODEL	SHACMAN F3000 8X4 BULK CEMENT TANK TRUCK
ENGINE	WEICHAI WP10.380E22, 380hp. EURO-II (option: WEICHAI 340HP OR CUMMINS ENGINE)
TRANSMISSION	FAST 10JSD180 , 10F&2R, MANUAL
AXLES	MAN Axles. Front 7.5T/9.5T, Rear 13T/16T, ratio 5.262
CABIN	F3000 Flatroof Cabin with A/C. one sleeper
TIRE	12.00R20 Radial tube tire (option: 12R22.5 , 315/80R22.5)
FUEL TANK	400L Aluminum alloy tank
	40m3 bulk cement tank with pipe system
OTHERS	Overall size: 11500x2500x3600mm; Curb weight: 15000kg



MODEL	SHACMAN L3000 4X2 TRUCK MOUNTED CRANE
ENGINE	WEICHAI WP6.210E32, 210hp. EURO-II (option: CUMMINS ENGINE 210hp or 245hp)
TRANSMISSION	FAST 8JS85TM+QD40J PTO , 8F&1R, MANUAL
AXLES	MAN Axles. Front 4.8T, Rear 11.5T, ratio 5.286
CABIN	L3000 Standard Cabin with A/C
TIRE	10.00R20 Radial tube tire
FUEL TANK	200L Iron tank
CARGO BOX	6000 *2450*600/800 MM
CRANE BOOM	XCMG 5T Telescopic crane boom (option, 6T, 8T crane)
OTHERS	Overall size: 9000x2500x3500mm; Curb weight: 12000kg



MODEL	SHACMAN F3000 6X4 TRUCK MOUNTED CRANE
ENGINE	WEICHAI WP10.340E32, 340hp. EURO-II (option: WEICHAI 380HP OR CUMMINS ENGINE)
TRANSMISSION	FAST RTD11509C+QH50PTO , 9F&1R, MANUAL
AXLES	MAN Axles. Front 7.5T/9.5T, Rear 13T/16T, ratio 4.769
CABIN	F3000 Flatroof Cabin with A/C. one sleeper
TIRE	12.00R20 Radial tube tire (option: 12R22.5 , 315/80R22.5)
FUEL TANK	400L Aluminum alloy tank
CARGO BOX	8000*2450*600 MM
CRANE	XCMG 12T Foldable crane boom (option 10T, 14T, 16T)
OTHERS	Overall size: 12000x2500x3600mm; Curb weight: 13000kg



MODEL	SHACMAN X3000 8X4 TRUCK MOUNTED CRANE
ENGINE	WEICHAI WP10.380E22, 380hp. EURO-II (option: WEICHAI 400HP OR CUMMINS ENGINE)
TRANSMISSION	FAST 10JSD180+QH50PTO , 10F&2R, MANUAL
AXLES	MAN Axles. Front 7.5T/9.5T, Rear 13T/16T, ratio 4.769
CABIN	X3000 Flatroof Cabin with A/C. one sleeper
TIRE	12.00R20 Radial tube tire (option: 12R22.5 , 315/80R22.5)
FUEL TANK	400L Aluminum alloy tank
CARGO BOX	8000*2450* 600 MM
CRANE	XCMG 16T Telescopic crane boom (option 15T ~25T crane boom, foldable or telescopic both available)
OTHERS	Overall size: 12000x2500x3600mm; Curb weight: 15000kg



MODEL	SHACMAN 6X4 MINING DUMP TRUCK (40-50T)
ENGINE	YUCHAI YC6MK375-33, 375HP POWER, EURO-II
TRANSMISSION	FAST 10JSD180 + QH50PTO, 10F&2R, MANUAL
AXLES	MAN Axles. Front 9.5T, Rear 2*16T, ratio 6.733
CABIN	Offset single-side cab; hydraulic main seat; four-point mechanical suspension; double-side sliding windows; air conditioner
TIRE	12.00R20/18PR Mining pattern
FUEL TANK	400L Iron tank
BODY SIZE	5600/5800x2450x1650mm, Bottom 10mm sides 6mm; HYVA 157 cylinder; U-shaped cargo box; Rear door mining locking device; 8mm high-strength plate for the rear door; Other standard configurations
OTHERS	Overall size: 10500x2500x3400mm; Curb weight: 13000kg



MODEL	SHACMAN STL360, 6X4 MINING DUMP TRUCK (60T)
ENGINE	CUMMINS QSM11(385), 385HP power, EURO-III
TRANSMISSION	FAST 7DS220, MANUAL (Option: Allison 4500ORS auto gearbox)
AXLES	MAN Axles. Front 12T, Rear 2*25T
CABIN	Offset single-side cab; hydraulic main seat; four-point mechanical suspension; double-side sliding windows; air conditioner
TIRE	14.00-24 Mining pattern, (option: 14.00R24)
DIESEL TANK	400L aluminum alloy
BODY SIZE	5600x3000x1600/1800mm, Bottom 14mm sides 10mm front 10mm; Deppkaler front cylinder; materials: NM400+ T700
OTHERS	Overall size: 8550x3255x4000mm; Curb weight: 23000kg



MODEL	SHACMAN STL380, 6X4 MINING DUMP TRUCK (80T)
ENGINE	CUMMINS QSM11(420), 420HP power, EURO-III (Option: WEICHA I WP13G480E310, 480HP)
TRANSMISSION	FAST 8DS240A, MANUAL (Option: Allison 4600ORS auto gearbox)
AXLES	MAN Axles. Front 20T, Rear 2*35T
CABIN	Offset single-side cab; hydraulic main seat; four-point mechanical suspension; double-side sliding windows; air conditioner
TIRE	14.00-25 Mining pattern, (option: 14.00R25)
FUEL TANK	600L aluminum alloy
BODY SIZE	5800x3200x1800mm, Bottom 16mm sides 12mm front 10mm; Deppkaler front cylinder; materials: NM400+ T700
OTHERS	Overall size: 8900x3505x4250mm; Curb weight: 30000kg



MODEL	SHACMAN X9 4X2 SWING ARM GARBAGE TRUCK
ENGINE	YUCHAI YC4D140-33, 140HP, EURO-II
TRANSMISSION	FAST 8JS85E-C+QD40J PTO
AXLES	MAN Axles. Front 2.5T, Rear 6T, ratio 5.83
CABIN	X9-1995 single cabin, 2+1 seats, with air conditioner
TIRE	7.50R16/14PR Radial tube tire
FUEL TANK	130L Iron tank
BODY	Bucket volume: 7m3 Thickness: floor 4mm, side 3mm
OTHERS	Overall size: 7000x2300x2500mm; Curb weight: 5000kg



MODEL	SHACMAN F3000 6X4 COMPRESSED GARBAGE TRUCK
ENGINE	WEICHA I WP10.340E22, 340hp. EURO-II (option: WEICHA I 380HP OR CUMMINS ENGINE)
TRANSMISSION	FAST RTD11509C+QH50 PTO, 9F&1R, MANUAL
AXLES	MAN Axles. Front 7.5T/9.5T, Rear 13T/16T, ratio 4.769
CABIN	F3000 Flatroof Cabin with A/C. one sleeper
TIRE	12.00R20 Radial tube tire (option: 12R22.5, 315/80R22.5)
FUEL TANK	400L Aluminum alloy tank
BODY	20m3 garbage tank volume (15m3-25m3 option)
OTHERS	Overall size: 11500x2500x3600mm; Curb weight: 15000kg



MODEL	SHACMAN F3000 8X4 WRECKER TRUCK (30T)
ENGINE	WEICHA I WP10.380E22, 380hp. EURO-II (option: WEICHA I 400HP OR CUMMINS ENGINE)
TRANSMISSION	FAST 10JSD180+QH50 PTO, 10F&2R, MANUAL
AXLES	MAN Axles. Front&Middle 9.5T, Rear 16T, ratio 5.262
CABIN	F3000 Flatroof Cabin with A/C. one sleeper
TIRE	12.00R20 Radial tube tire (option: 12R22.5, 315/80R22.5)
FUEL TANK	400L Aluminum alloy tank
BODY	with Max. 30T lifting boom, 2 sections ; with Max. 30T support arm, 3 sections; with 10T hydraulic winch, 2pcs; two sides operation, with rear leg with 1 set of cross arms, 1 set of E-shaped tire holders, 6 pairs of forks, 2 pairs of fork seats, 1 pair of leaf spring forks, 2 sets of ratchet straps, 2pcs 10x3M chains, 2pcs 12x3.8m chains and other tools.
OTHERS	Overall size: 12000x2500x3600mm; Curb weight: 18000kg



Name	QINGGONG 2.6m³ Self-loading Concrete Mixer Truck
Model	QG-2.6
Engine model	Yuchai 4102
Rated power	77.3KW
Drive mode	4-wheel drive
Cabin	Widen luxurious cab, anti-rollover, anti-falling object type, front window can be opened, with A/C, air seat
Speed	Divided into 8 gears, 4 in and 4 out, the driving speed of the low-speed gear is 10—15km/h, and the driving speed of the high-speed gear is 30—40km/h.
Water tank:	450L
Diesel fuel tank	120L
Weight	7,000 kg
Overall dimensions	6200mm * 2800mm * 3100mm



Name	QINGGONG 3.5m³ Self-loading Concrete Mixer Truck
Model	QG-3.5
Engine model	Yuchai 4105
Rated power	85KW
Drive mode	4-wheel drive
Cabin	Widen luxurious cab, anti-rollover, anti-falling object type, front window can be opened, with A/C, air seat
Speed	Divided into 8 gears, 4 in and 4 out, the driving speed of the low-speed gear is 10—15km/h, and the driving speed of the high-speed gear is 30—40km/h.
Water tank:	700L
Diesel fuel tank	130L
Weight	8500 kg
Overall dimensions	7100mm * 2750mm * 3300mm



Name	QINGGONG 4.0 m³ Self-loading Concrete Mixer Truck
Model	QG-4.0
Engine model	Yuchai 4108
Rated power	91KW
Drive mode	4-wheel drive
Cabin	Widen luxurious cab, anti-rollover, anti-falling object type, front window can be opened, with A/C, air seat
Speed	Divided into 8 gears, 4 in and 4 out, the driving speed of the low-speed gear is 10—15km/h, and the driving speed of the high-speed gear is 30—40km/h.
Water tank:	800L
Diesel fuel tank	135L
Weight	9100 kg
Overall dimensions	7600*2950*3400mm



Name	QINGGONG 4.0 m³ Integral Self-loading Concrete Mixer Truck
Model	QG-4.0 Integral
Engine model	Yuchai 4108
Rated power	91KW
Drive mode	4-wheel drive
Cabin	Widen luxurious cab, anti-rollover, anti-falling object type, front window can be opened, with A/C, air seat
Water tank:	2x380L
Diesel fuel tank	180L
Weight	10300 kg
Overall dimensions	7900*2950*3600mm



Name	QINGGONG Diesel powered concrete mixing pumping machine
Model	QG-JBT40-13-450R
Engine model	WP4.1D80E201 / Weifang Huadong R4105ZD
Rated power	72KW/66KW
Maximum theoretical concrete output (L./H.)	40 m³/h
Concrete cylinder diameter × stroke length	Φ160×1000mm
Hopper capacity×hopper height	450×1000 L×mm
Maximum delivering distance (vertical / horizontal)	100/300 mm
Outlet inner diameter	Φ125mm
Rated speed	1800 RPM
Weight	6000 kg
Overall dimensions	5200×2280×2900 mm



Name	QINGGONG Diesel Engine Concrete Pump
Model	QG-HBTS40-13-60R
Engine model	4105ZD
Rated power	60KW
Maximum theoretical concrete output (L./H.)	42/23 m³/h
Maximum concrete pumping pressure (H. /L.)	13/6.3 Mpa
Maximum delivering distance (vertical / horizontal)	180/550 m
Hopper capacity × hopper height	400×1100 L×mm
Outlet inner diameter	Φ125mm
Rated speed	1800 RPM
Weight	3100 kg
Overall dimensions	4300×1670×1680mm



Name	QINGGONG 6013/7015 Tower Crane
Height (m)	60-85
Jib length (m)	60-70
Max Load (T)	8-10
Mast Section Size (m)	1.6×1.6×3
Tip load (T)	1.3/1.5/1.8
Containers	6-9*40HQ



Name	QINGGONG 90T WT90 Mining Dump Truck
Driving type	6×4
Wheel	14.00R25, 10.00-25
Payload mass (kg)	60000
Overall dimensions (L×W×H) (mm)	9050×3550×4150
Engine	WP12G460E310
Cab	46" Wide Cab, Left Mounted, Half Floating, Front Rolling 46°, per-heater for cab, ele-heat rearview mirror
Transmission	8DS240A
Drive axle	Central, wheel - side planet double - stage deceleration belt axle differential lock



Name	QINGGONG 105T WT105 Mining Dump Truck
Driving type	6×4
Wheel	16.00R25, 11.25-25
Payload mass (kg)	75000
Overall dimensions (L×W×H) (mm)	11165×3860×4730
Engine	WP12G460E310
Cab	46" Wide Cab, Left Mounted, Half Floating, Front Rolling 46°, per-heater for cab, ele-heat rearview mirror
Transmission	8DS240A/8DS260
Drive axle	Central, hub planetary two-stage reduction, with inter-axle differential lock



Name	QINGGONG 3.2/5ton Forklift
Load capacity	3200kg/5000kg
Engine	China Xinchai engine/Electric
Transmission	Hydraulic Auto transmission
Mast	2-stage 3m mast
Tire	Pneumatic tire
Warning light	Warning and rear light
Fork length	1.22m fork



Name	QINGGONG Excavator
Operating Weight	6/8/21/30/37/50/70/85/110T
Engine	Yanmar/Cummins/ISUZU
Power	36.2-574Kw
Main Parts	Imported Kawasaki Hydraulic system, pump, valve, swing motor, Doosan travel motor
Bucket	0.22m³-6m³



Name	QINGGONG 388 BACKHOE LOADER
Overall Operating Weight	8200KG
Loading Bucket Capacity	1.0m³
Backacter Bucket Capacity	0.3m³
Loading Bucket Capacity	2500KG
Engine	YUCHAI YC4A105Z-T20/WEICHAN WP4G95E221
Transmission	4 forward and 4 reverse shift
Brake	Air over oil caliper, external, self-regulation, self-balance
Rated Power	75KW/70KW
Other Model	WZ30-25



Name	XCMG SINGLE DRUM ROAD ROLLER
Hot Model	XS203J
Engine model	SC8D175.2G2B1
Max. Power	128kw 1800r/min
Operating Weight	20000Kg
Compacting width	2130mm
Distributed mass of driving wheel	10000 kg
Overall dimension	6220×2390×3200mm
Other Model	12/14/16/18/22-33T



Name	XCMG SINGLE DRUM ROAD ROLLER WITH FOOT PAD
Hot Model	XS163JPD
Engine model	SC7H160.3G2B
Max. Power	118kw 1800r/min
Operating Weight	16000Kg
Compacting width	2130mm
Distributed mass of driving wheel	8000 kg
Overall dimension	6150×2300×3200mm



MODEL	XCMG DOUBLE DRUM ROAD ROLLER
Model	XD143
Engine model	DEUTZ BF4M2013-15T3R/2
Max. Power	111kw 2100 r/min
Operating Weight	14000Kg
Dimension of vibrating drum	1300*2130mm
Overall dimension	5146×2317×3099mm



Name	XCMG TIRE ROAD ROLLER
Model	XP263
Engine model	SC7H160.2G3
Max. Power	132kw 1800r/min
Operating Weight	26300Kg
Compacting width	2360mm
Number of tires	4 in front and 5 in back
Overall dimension	4925×2530×3470mm



Name	XCMG MINI DOUBLE DRUM ROAD ROLLER
Model	XMR403
Engine model	ZN490B
Max. Power	36kw 2600r/min
Operating Weight	4000Kg
Compacting width	1300mm
Working speed	0~10.6 km/h
Overall dimension	2720×1416×2776mm



Name	XCMG HYDRAULIC COLD RECYCLER
Model	XLZ2103
Engine model	WP13G530E310
Max. Power	535kw 2100r/min
Operating Weight	21000Kg
Milling width	2100mm
Diameter of milling wheel (with cutter)	1380mm
Overall dimension	9232×3162×3450mm



Name	Motor Grader
Model	GR135
Engine model	Cummins 6BT5.9
Rated power/speed	97/2200 kW/rpm
Forward velocity	5/8/13/20/30/42km/h
Reverse speed	5/13/30km/h
Tractive effort f=0.75	≥59m
Minimum turning radius	6.6m
Length X chord height	3660*610mm
Overall dimension	8015*2380*3050mm
Total weight	11200KG



Name	Motor Grader
Model	GR215
Engine model	Cummins 6CTA8.3
Rated power/speed	160/2200kW/rpm
Forward velocity	5/8/11/19/23/38km/h
Reverse speed	5/11/23km/h
Tractive effort f=0.75	≥85m
Minimum turning radius	7.3m
Length X chord height	3965*610mm
Overall dimension	8970*2625*3420mm
Total weight	16500KG



Name	Motor Grader
Model	GR3505
Engine model	Cummins QSM 11
Rated power/speed	11320*3400*4100mm
Machine weight	32000KG
Tire Specifications	23.5 R25
Axle Distance Between Front and Rear	7300 mm
Wheel Base Between Front and Rear	1996 mm
Ground Clearance	625 mm Front Axle
Blade Length	4877 mm
Blade Height	686 mm
Fuel Tank	550 L



Name	Pavers
Model	RP603L
Engine model	SDEC SC4H140G3
Rated Power	103/2200kW/rpm
Operating weight	16500kg
Overall dimensions	6660×2600×4000mm
Basic Pave Width	2.5~4.75m
Maximum Pave Width	6m
Maximum L.ayer Thickness	260mm
Maximum Paving Speed	17m/min
Maximum Travel Speed	15km/h
Theoretic productivity	400t/h
Hopper Capacity	13t
Gradeability	20%
Heating of screed	Electric/Gas heating
Travel type	tire



Name	Pavers
Model	RP903
Engine model	SDEC SC9DK220
Rated Power	162/2000kW/rpm
Operating weight	24300~28000kg
Overall dimensions	7180×3000×4060mm
Basic Pave Width	3.0~5.85m
Maximum Pave Width	9.15m
Maximum L.ayer Thickness	400mm
Maximum Paving Speed	18m/min
Maximum Travel Speed	3km/h
Theoretic productivity	900t/h
Hopper Capacity	15t
Gradeability	20%
Heating of screed	Electric heating
Travel type	Crawler




Name	Asphalt distributor
Model	XLS803
Max. spraying width	6 m
Asphalt spraying amount	0.2~3.0kg/m ²
Deviation of spraying amount	±0.07kg/m ²
Capacity of asphalt tank	8 (Notice 7.5) m ³
Operating speed	SINOTRUCK STEYR ZZ1181M521GE1 (China Tier VI) –
Engine type	MC07.28–50
Engine power	206/2300 kW/ (r/min)
Driving mode	4×2
Maximum traveling speed	95km/h
Fuel tank capacity	300L



Name	XCMG XE27U Crawler Excavator
Operating weight	2780kg
Engine rated power	15.6kW/2400rpm
Maximum torque	70.3N.M/1600rpm
Gradeability	≤30°
Rated flow of main pump	82.8L/min
Bucket capacity	0.06m³
Bucket digging force	23kN
Arm digging force	14kN



Name	XCMG XE215C Crawler Excavator
Operating weight	21450kg
Engine rated power	106.5kW/1950rpm
Maximum torque	551N.M/1600rpm
Gradeability	≤35°
Rated flow of main pump	2x206 L/min
Bucket capacity	0.8–1.0m³
Bucket digging force	138kN
Arm digging force	103kN

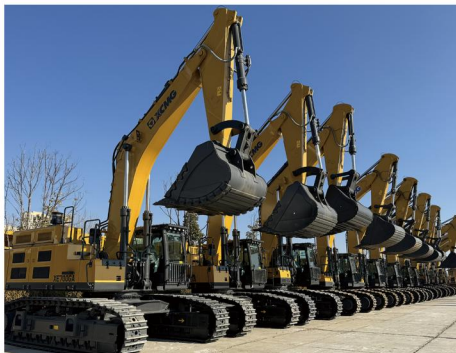

Name	XCMG XE700D Crawler Excavator
Operating weight	69000kg
Engine rated power	336kW/1800rpm
Maximum torque	2102N.M/1400rpm
Gradeability	≤35°
Rated flow of main pump	2x450 L/min
Bucket capacity	2.4–4.6m³
Bucket digging force	363kN
Arm digging force	300kN



Name	XCMG XE210WD Wheel Excavator
Operating weight	20500kg
Engine rated power	135kW/2050rpm
Maximum torque	740N.M/1200rpm
Gradeability	60%
Rated flow of main pump	2x220 L/min
Bucket capacity	0.86m³
Bucket digging force	144kN
Arm digging force	100kN



Name	XCMG XE215CLL Long boom Excavator
Operating weight	22350kg
Engine rated power	106.5kW/1950rpm
Maximum torque	551N.M/1600rpm
Gradeability	70%
Rated flow of main pump	2x206 L/min
Bucket capacity	0.4m³
Bucket digging force	11690mm
Arm	6335mm
Mono-boom	8140mm



Name	XCMG XC870K Backhoe Loader
Operating weight	7600kg
Engine rated power	70kW
Rated load	2500kg
Loader bucket capacity	1.0m³
Rated flow of main pump	2x220 L/min
Excavating Bucket capacity	0.3m³
Bucket digging force	63kN
System pressure	24Mpa



Name	XCMG LW180K Wheel Loader
Rated load	1800kg
Bucket capacity	1.0m ³
Machine weight	6000kg
Engine Model	YC4D80-T20
Rated power	58kw
Emission standards	Euro II
Tyre size	16/70-20
Overall dimension	5850x2060x2950mm



Name	XCMG LW300FN Wheel Loader
Rated load	3000kg
Bucket capacity	1.5~2.5 m ³
Machine weight	10600±200kg
Engine Model	WP6G125E22
Rated power	92kw
Emission standards	Euro II
Tyre size	17.5-25-12PR
Overall dimension	7050x2482x3118mm



Name	XCMG ZL50GN Wheel Loader
Rated load	5000kg
Bucket capacity	2.5-4.5 m ³
Machine weight	17500±300kg
Engine Model	WD10G220E21/SC11CB220G2B
Rated power	162kw
Emission standards	Euro II
Tyre size	23.5-25-16PR
Overall dimension	8225x3016x3515mm



Name	XCMG LW600KN Wheel Loader
Rated load	6000kg
Bucket capacity	3.0~4.5 m ³
Machine weight	20000±300 kg
Engine Model	SC11CB240.1G2B
Rated power	178kw
Emission standards	Euro II
Tyre size	23.5-25
Overall dimension	8505x3220x3515mm



Name	XCMG LW700KN Wheel Loader
Rated load	7000kg
Bucket capacity	6 m ³
Machine weight	25500 kg
Engine Model	WD12G310E221
Rated power	226kw
Emission standards	Euro II
Tyre size	26.5R25
Overall dimension	9455x3430x3630mm



Name	XCMG skid steer loader XC760K
Rated load	1080kg
Tipping load	2160kg
Bucket capacity (stacking height)	0.6 m ³
Bucket capacity (tiling)	0.47 m ³
Engine Model	4TNV98T
Operating weight	3450kg
Rated power	61.3kw
Emission standards	Euro III
Tyre size	12-16.5
Overall dimension	3610*2000*1960 mm



Name	XCMG Truck Crane
Model Number	QY25K5D/QY50KD
Max.Lifting Load	25 ton/50T
Max.Lifting Height	47 m/58.1 m
Weight	31750 kg/41000 kg
Overall Dimension	12300*2500*3350 mm/13750*2800*3520 mm
Base boom	10.4 m/11.3 m
Fully extended boom	39.5 m/42.7m



Name	XCMG 100 Ton Crawler Crane
Model Number	XGC100
Max.Lifting Load	100 ton
Rated Loading Capacity	100 ton
Weight	104500 kg
Overall Dimension	10500*3000*3350 mm
Boom Length	19 – 73 m
Boom luffing angle	30 – 81



Name	XCMG Rough Terrain Crane
Model Number	XCR30/XCR55/XCR75
Max.Lifting Load	30/55/75 ton/
Max.Lifting Height	42.2 m
Weight	27334 kg
Wheel Base	3600 mm
Base boom	10.2 m
Fully extended boom	34.4 m



Name	Articulated mining dump truck
Model Number	XDA45
Load capacity	39000 kg
Kerb weight	29500 kg
Max.speed	45 km/h
Max.grade ability	45%
Rated power/rotating speed	309/1900 kw/rpm
Overall Dimension	11070*3950*3846 mm



Name	Double-axle rigid dump truck
Model Number	XDE440
Drive type	4*2
Weight	62300 kg
Container volume	250 cubic meter
Max.speed	60 km/h
Power	2800/1800 kw



Name	50-80 tph impact crushing plant
Model Number	MK70-4
Design capacity	50 – 80 t/h
Design feeding size	350mm
Customer request final size	1/4, 1/2 & 3/4
Feeder	FK0936
Primary crusher-Jaw crusher	PEW400x600
Secondary crusher-Cone crusher	PYB900
Vibrating screen	3SKX1545



Name	XCMG 37m Concrete Pump Truck
Model	XS37
Dimension(L*W*H)	10255×2525×3750mm
Theoretical output	120 m ³ /h
Turning radius of fabric pole	32.5m
Theoretical pumping frequency	27–28/min
Fabric pole up to height	36.5m
Slewing angle	360°
Chassis system	SINOTRUK HOWO
Model	ZZ5337THBN464GF1
Wheelbase	4400+1400mm
Engine	MC07H.35–60



Name	XCMG 43m Concrete Pump Truck
Model	XS43
Dimension(L*W*H)	11260×2500×3990mm
Theoretical output	170 m ³ /h
Turning radius of fabric pole	37.3m
Fabric pole up to height	43m
Fabric pole reachable depth	29m
Slewing angle	360°
Chassis system	SINOTRUK HOWO/ SITRAK
Wheelbase	4800 mm
Engine	ZZ5347V4847C1



Name	XCMG 47m Concrete Pump Truck
Model	XS47
Dimension(L*W*H)	12300×2540×4000mm
Theoretical output	180 m ³ /h
Turning radius of fabric pole	42.1m
Fabric pole up to height	47.1m
Fabric pole reachable depth	30.4m
Slewing angle	360°
Chassis system	SINOTRUK HOWO
Model	ZZ5357T XFV464MF1
Wheelbase	4400+1400/4800+1400mm
Engine	MC07H.35–60/MC11.44–60



Name	XCMG 58m Concrete Pump Truck
Model	XS58
Dimension(L*W*H)	14537×2550×4000mm
Theoretical output	180 m ³ /h
Turning radius of fabric pole	52.5m
Fabric pole up to height	57.5m
Fabric pole reachable depth	40.5m
Slewing angle	360°
Chassis system	SITRAK
Model	ZZ5466V516MF1/ZZ5446V516MF1
Wheelbase	2300+5150+1400/1950+4500+1400 mm
Engine	MC13.50–61/MC11.44–60



Name	XCMG Asphalt mixing equipment
Model	XAP125
Rated production capacity	120t/h
Mixing capacity	170 m ³ /h
Asphalt	37.3m
Powder	43m
Aggregates	29m
Fuel consumption rate	360°
Dust emission concentration	SINOTRUK HOWO/ SITRAK
Smoke blackness	4800 mm
Maximum single machine power	ZZ5347V4847C1
footprint (of a building, piece of land etc)	750 m ² (30m×25m)
Other model	XAP83/XAP85/XAP123/XAP165/XAP205/XAP245/XAP325



Name	XCMG Concrete Batching Mixing Plant
Model	HZS180V
Theoretical production rate	180 m ³ /h
Discharge height	4m
Mixer type	JS3000
Mixer power	2×55kW
Nominal volume of mixer	3000L
Production period	60S
Max. diameter of aggregate	≤80mm
Volume of aggregate silo	4×25 m ³
Volume of powder silo (optional)	4×200t
Capability of batching plant	4800 L/Silo
Other model	HZS60V/HZS90V/HZS120



Name	LGMRT ST120H Top Hammer Drill
Hole Diam	76-127mm
Rock Drill Output Power	22kW
Engine Power	179kW
Air Flow & Pressure	9.6m³/min@10bar
Drill Pipes	T45 /T51
Total Weight	16,500kg
Engine Type	Cummins QSB8.3-C
Other model	DTH Drill, Water drill



Name	XR130E Rotary Drilling Rig
Engine	Cummins QSB7-C227
Rated power	39000 kg
Max Diameter	29500 kg
Max Depth	45 km/h
Max Extraction Force	45%
Safety Range of Drilling	309/1900 kw/rpm
Working Dimension	11070*3950*3846 mm
Transport Dimension	14097*2500*3500mm
Overall Weight	43t
Other model	



Name	XC6-4517K Telescopic Handler
Gross Weight	13500kg
Engine Power	82kW
Rated Load	4500kg
Maximum Lifting Height	16700mm
Maximum Forward Reach	12600mm
Maximum Traction Force	≥70kN
Overall Dimension	6960×2500×2850mm
Fork Length	1200mm
Other model	10m, 12m, 14m, 16m



Name	XCMG FD30T Forklift
Rated Load Capacity	3000kg
Fork Size (LxWxT)	1070×125×45mm
Load Centre	500mm
Rated Lift Height	3000mm
Free Lift Height	100mm
Mast Tilt Angle (F/R, α°/β°)	6°/12°
Travel Speed (No Load)	19km/h
Other Model	3/5/7/10T Etc

OTHER BRAND



Name	SANY 21T Hydraulic Excavator SY215
Bucket capacity	0.93m³
Operating weight	21900kg
Engine model	Mitsubishi 4M50
Rated power	118kW/2000rpm
Maximum torque	580N.m/1600rpm
Displacement	4.9L
Digging force of bucket	138kN/148kN
Digging force of arm	103kN/107kN
Other model	5T,7T,21T,35T,40T,50T,75T,98T



Name	SHANTUI 220HP Bulldozer SD22
Engine model	Cummins NT855-C280S1
Gross Power	175KW(235HP)@1800rpm
Net power	162kw/220hp@1800rpm
Operating weight	23.4T
Ripper	Three-shank ripper
Blade	Straight-tilt, Angle,U-blade,Semi-U-blade
Other model	D6, D7, D8, D9



Name	SANY 25T Crane Truck STC250C4
Engine model	WEICHAH WP7.300E31
Max. engine power	220/2100 kW/rpm
Drive form	6x4, 8x4
Gross weight	31900kg
Max. lifting capacity	25T
Outrigger span	5.28x6.4m (Longitudinal x Transverse)
Axle	Axles 1 is steered; axle 2 & 3 are drive axles
Basic boom length	10.7m
Full-extend boom length	41m
Tire	Radial tires sized 12.00R22.5
Other model	16T, 25T, 50T, 100T, 200T

OTHER BRAND



Name	SANY Hydraulic excavator SY500
Engine	ISUZU 6WG1
Bucket capacity	2.2-3.1m³
Operating weight	49500kg
Ground Pressure	84,5kPa
Displacement	11.8L
Standard track shoe width	600mm
Track length	5440mm
Maximum Travel Force	339kN
Bucket Digging Force	200kN
Overall dimension (LxWxH)	12095x3360x3790mm
Other model	5T,7T,21T,35T,40T,50T,75T,98T



Name	SANY TRUCK-MOUNTED CONCRETE PUMP
Engine model	SYG5260THB 370C-10
Engine type	P11C-WE
Net power	162 kW/220HP/1800 rpm
Dead weight	26500kg
Displacement	10.5L
Vertical reach	36.5m
Horizontal reach	31.8m
Reach depth	20.9m
Unfolded reach	7.5m
Chassis	SANY, BENZ
Other model	37m, 43m, 46m, 62m