

Wireless Charger

无线充

TYPE-C



SK-SW15-002C / 15W
SK-SW15-010C / 15W

产品特点


Product features

- 小体积、重量轻、全密封、携带方便；
 - 车载分离式底座，超强磁吸设计，确保使用有足够的黏力；
 - 高功率密度，极高性价比，高可靠性；
 - 充电座无线充输入DC头有TYPE-C、LIGHTNING规格可选；
 - 输出特点：具有恒流恒压模式，高精度低噪声，输出功率支持5W/7.5W/10W适配Android及iPhone手机充电
- 外观专利及新型实用性专利；
 - 工作温度：0℃~40℃，5%~90%RH
 - 存储环境：-20℃~85℃，5%~90%RH
 - 冷却方式：自然冷却；
 - 能效指标：符合DOE/CEC-VI标准；符合ROHS标准；
 - 认证类型：CE/FCC；
 - 平均故障率：50，000小时；
 - 产品颜色及包装方式可定制

- Ultra-small size,light weight,fully sealed and easy to carry.
 - Vehicle-mounted detachable base, strong magnetic absorption design, to ensure enough adhesive force for use ;
 - High power density, high cost performance, high reliability;
 - Wireless charger, the input DC jacks include type C, lightning two types to choose from;
 - Output features: constant current and constant voltage mode, high precision and low noise, output power supports5W/7.5W/10W/15W suitable for charging Android and
- iphone series mobile phones;
 - Appearance patent and new practical patent;
 - Working temperature: 0 ℃ ~40℃, 5% ~90% RH;
 - Storage environment: -20℃~85℃, 5%-90%RH;
 - Cooling mode: natural cooling;
 - Compliance with energy efficiency: DOE/CEC-VI standards;
 - Meet ROHS standards;
 - Certifications: CE/FCC;
 - Average working life: 50,000 hours;
 - Product color and packaging can be customized.

外壳尺寸图

Case dimension drawing

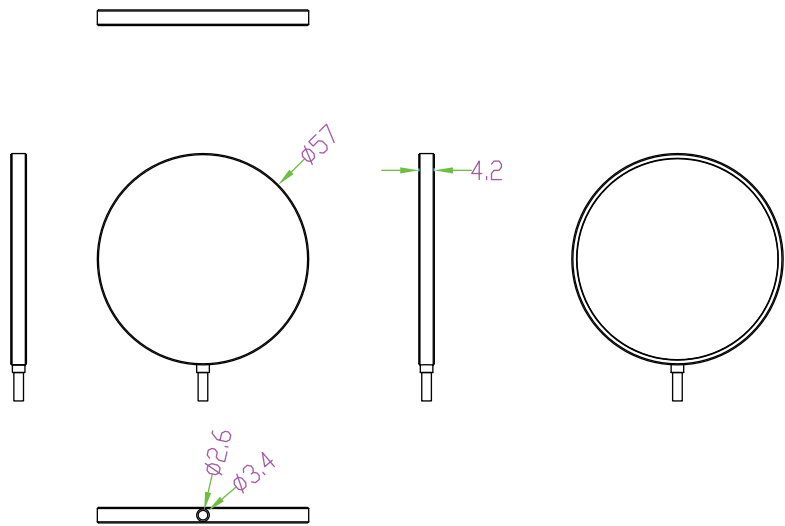

电性特性

Electrical characteristics

产品型号	输入电压	输入电流	输出电流	输出功率
Model Name	Input Voltage (V)	Input Current (A)	Output Current (A)	Output Power (W)
SK-SW15-002C	单 Type-C: 5-12V	5V3A: 9V2.22A: 12V1.67A:	5V1A: 9V1.12A: 9V1.67A ;	15W max
SK-SW15-010C				

Wireless Charger

无线充

TYPE-C



SK-SW15-003C / 15W

产品特点


Product features

- 小体积、重量轻、全密封、携带方便；
 - 车载出风口底座，超强磁吸设计，确保使用有足够的黏力；
 - 高功率密度，极高性价比，高可靠性；
 - 充电座无线充输入DC头有TYPE-C、LIGHTNING规格可选；
 - 输出特点：具有恒流恒压模式，高精度低噪声，输出功率支持5W/7.5W/10W适配Android及iPhone手机充电；
- 外观专利及新型实用性专利
 - 工作温度：0℃~40℃，5%~90%RH
 - 存储环境：-20℃~85℃，5%~90%RH
 - 冷却方式：自然冷却；
 - 能效指标：符合DOE/CEC-VI标准；符合ROHS标准；
 - 认证类型：CE/FCC；
 - 平均故障率：50，000小时；
 - 产品颜色及包装方式可定制

- Ultra-small size,light weight,fully sealed and easy to carry.
 - Car air outlet base, strong magnetic absorption design to ensure enough adhesive force for use;
 - High power density, high cost performance, high reliability;
 - Wireless charger, the input DC jacks include type C, lightning two types to choose from;
 - Output features: constant current and constant voltage mode, high precision and low noise, output power supports5W/7.5W/10W/15W suitable for charging Android and
- iphone series mobile phones;
 - Appearance patent and new practical patent;
 - Working temperature: 0 ℃ ~40℃, 5% ~90% RH;
 - Storage environment: -20℃~85℃, 5%-90%RH;
 - Cooling mode: natural cooling;
 - Compliance with energy efficiency: DOE/CEC-VI standards;
 - Meet ROHS standards;
 - Certifications: CE/FCC;
 - Average working life: 50,000 hours;
 - Product color and packaging can be customized.

外壳尺寸图

Case dimension drawing

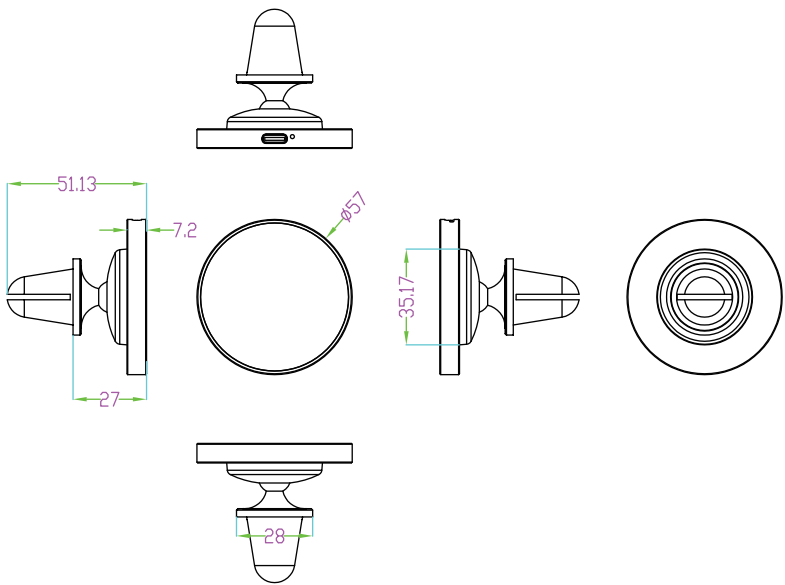

电性特性

Electrical characteristics

产品型号	输入电压	输入电流	输出电流	输出功率
Model Name	Input Voltage (V)	Input Current (A)	Output Current (A)	Output Power (W)
SK-SW15-003C	单 Type-C: 5-12V	5V3A: 9V2.22A: 12V1.67A:	5V1A: 9V1.12A: 9V1.67A ;	15W max

Wireless Charger

无线充

TYPE-C



SK-SW15-004C / 15W

产品特点

Product features

- > 小体积、重量轻、全密封、携带方便；

> 车载分离式底座，超强磁吸设计，确保使用有足够的粘力；

> 高功率密度，极高性价比，高可靠性；

> 充电座无线充输入DC头有TYPE-C、LIGHTNING规格可选；

> 输出特点：具有恒流恒压模式，高精度低噪声，输出功率支持5W/7.5W/10W适配Android及iPhone手机充电；
- > 外观专利及新型实用性专利；

> 工作温度：0℃~40℃，5%~90%RH

> 存储环境：-20℃~85℃，5%~90%RH

> 冷却方式：自然冷却；

> 能效指标：符合DOE/CEC-VI标准；

> 符合ROHS标准；

> 认证类型：CE/FCC；

> 平均故障率：50，000小时；

> 产品颜色及包装方式可定制

- > Ultra-small size,light weight,fully sealed and easy to carry.

> Vehicle-mounted detachable base, strong magnetic absorption design, to ensure enough adhesive force for use;

> High power density, high cost performance, high reliability;

> Wireless charger, the input DC jacks include type C, lightning two types to choose from;

> Output features: constant current and constant voltage mode, high precision and low noise, output power supports5W/7.5W/10W/15W suitable for charging Android and
- iphone series mobile phones;

> Appearance patent and new practical patent;

> Working temperature: 0℃~40℃, 5%~90% RH;

> Storage environment: -20℃~85℃, 5%~90%RH;

> Cooling mode: natural cooling;

> Compliance with energy efficiency: DOE/CEC-VI standards;

> Meet ROHS standards;


> Certifications: CE/FCC;

> Average working life: 50,000 hours;

> Product color and packaging can be customized.

外壳尺寸图

Case dimension drawing

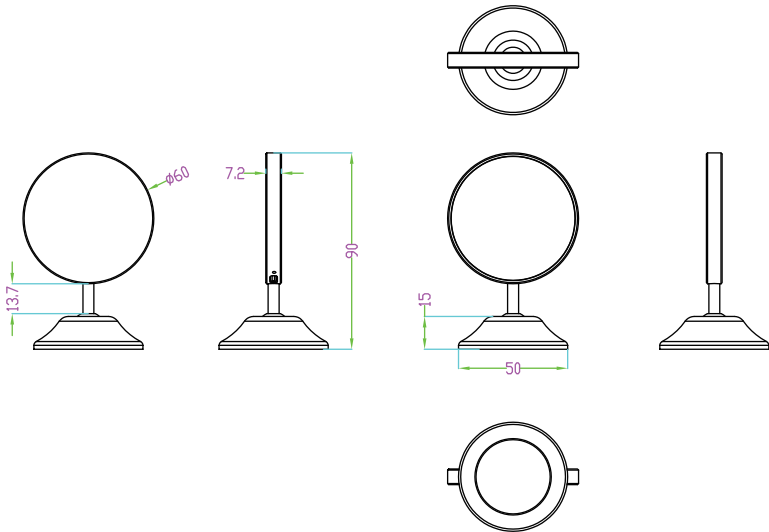

电性特性

Electrical characteristics

产品型号	输入电压	输入电流	输出电流	输出功率
Model Name	Input Voltage (V)	Input Current (A)	Output Current (A)	Output Power (W)
SK-SW15-004C	单 Type-C: 5-12V	5V3A: 9V2.22A: 12V1.67A:	5V1A: 9V1.12A: 9V1.67A :	15W max

Wireless Charger

无线充

TYPE-C



SK-SW15-005C / 15W



产品特点

Product features

- > 小体积、重量轻、全密封、携带方便；

> 车载分离式底座，超强磁吸设计，确保使用有足够的粘力；

> 高功率密度，极高性价比，高可靠性；

> 充电座无线充输入DC头有TYPE-C、LIGHTNING规格可选；

> 输出特点：具有恒流恒压模式，高精度低噪声，输出功率支持5W/7.5W/10W适配Android及iPhone手机充电；
- > 外观专利及新型实用性专利；

> 工作温度：0℃~40℃，5%~90%RH

> 存储环境：-20℃~85℃，5%~90%RH;

> 冷却方式：自然冷却；

> 能效指标：符合DOE/CEC-VI标准；

> 符合ROHS标准；

> 认证类型：CCC/ETL/PSE;

> 平均故障率：50，000小时；

> 产品颜色及包装方式可定制

- > Ultra-small size,light weight,fully sealed and easy to carry.

> Vehicle-mounted detachable base, strong magnetic absorption design, to ensure enough adhesive force for use;

> High power density, high cost performance, high reliability;

> Wireless charger, the input DC jacks include type C, lightning two types to choose from;

> Output features: constant current and constant voltage mode, high precision and low noise, output power supports5W/7.5W/10W/15W suitable for charging Android and
- iphone series mobile phones;

> Appearance patent and new practical patent;

> Working temperature: 0℃~40℃, 5%~90% RH;

> Storage environment: -20℃~85℃, 5%~90%RH;

> Cooling mode: natural cooling;

> Compliance with energy efficiency: DOE/CEC-VI standards;

> Meet ROHS standards;


> Certifications: CCC/ETL/PSE;

> Average working life: 50,000 hours;

> Product color and packaging can be customized.

外壳尺寸图

Case dimension drawing

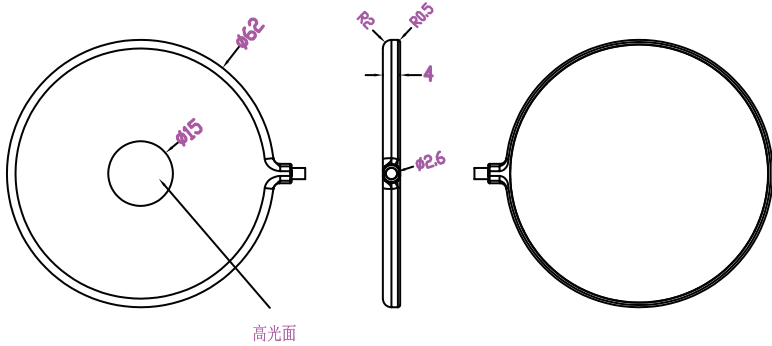

电性特性

Electrical characteristics

产品型号	输入电压	输入电流	输出电流	输出功率
Model Name	Input Voltage (V)	Input Current (A)	Output Current (A)	Output Power (W)
SK-SW15-005C	单 Type-C: 5-12V	5V3A: 9V2.22A: 12V1.67A:	5V1A: 9V1.12A: 9V1.67A :	15W max

Wireless Charger

无线充

TYPE-C



SK-SW15-011C / 15W

Wireless Charger

无线充

TYPE-C



SK-SW15-012C / 15W

产品特点

Product features

- > 小体积、重量轻、全密封、携带方便；

> 车载分离式底座，超强磁吸设计，确保使用有足够的粘力；

> 高功率密度，极高性价比，高可靠性；

> 充电座无线充输入DC头有TYPE-C、LIGHTNING规格可选；

> 输出特点：具有恒流恒压模式，高精度低噪声，输出功率支持5W/7.5W/10W适配Android及iPhone手机充电；
- > 外观专利及新型实用性专利；

> 工作温度：0℃~40℃，5%~90%RH；

> 存储环境：-20℃~85℃，5%~90%RH；

> 冷却方式：自然冷却；

> 能效指标：符合DOE/CEC-VI标准；

> 符合ROHS标准；


> 认证类型：CCC/ETL/PSE；

> 平均故障率：50，000小时；

> 产品颜色及包装方式可定制；

外壳尺寸图

Case dimension drawing

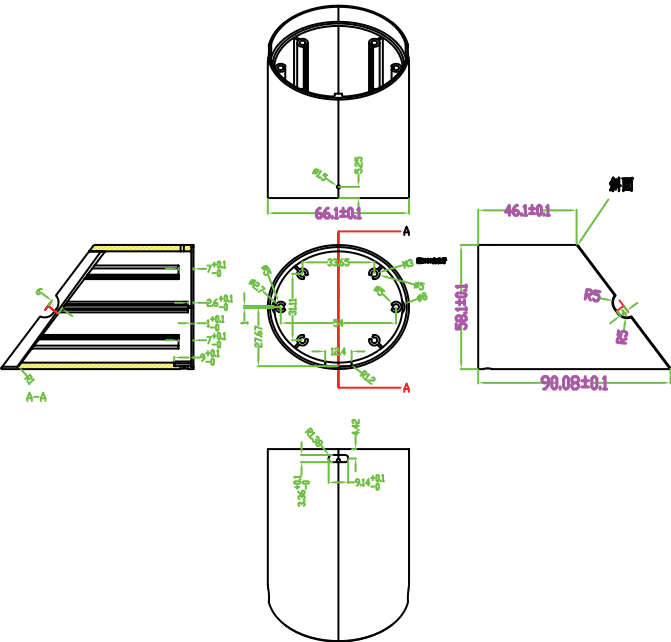

电性特性

Electrical characteristics

产品型号	输入电压	输入电流	输出电流	输出功率
Model Name	Input Voltage (V)	Input Current (A)	Output Current (A)	Output Power (W)
SK-SW15-011C	单 Type-C: 5-12V	5V3A: 9V2.22A: 12V1.67A:	5V1A: 9V1.12A: 9V1.67A ;	15W max

产品特点

Product features

- > 小体积、重量轻、全密封、携带方便；

> 车载分离式底座，超强磁吸设计，确保使用有足够的粘力；

> 高功率密度，极高性价比，高可靠性；

> 充电座无线充输入DC头有TYPE-C、LIGHTNING规格可选；

> 输出特点：具有恒流恒压模式，高精度低噪声，输出功率支持5W/7.5W/10W适配Android及iPhone手机充电
- > 外观专利及新型实用性专利；

> 工作温度：0℃~40℃，5%~90%RH；

> 存储环境：-20℃~85℃，5%~90%RH；

> 冷却方式：自然冷却；

> 能效指标：符合DOE/CEC-VI标准；

> 符合ROHS标准；


> 认证类型：CCC/ETL/PSE；

> 平均故障率：50，000小时；

> 产品颜色及包装方式可定制

外壳尺寸图

Case dimension drawing

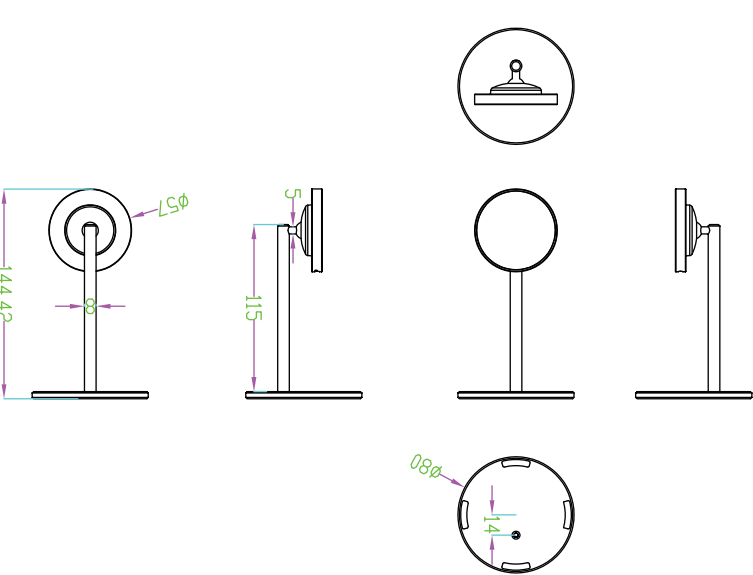

电性特性

Electrical characteristics

产品型号	输入电压	输入电流	输出电流	输出功率
Model Name	Input Voltage (V)	Input Current (A)	Output Current (A)	Output Power (W)
SK-SW15-012C	单 Type-C: 5-12V	5V3A: 9V2.22A: 12V1.67A:	5V1A: 9V1.12A: 9V1.67A ;	15W max