



徐州沔收喷灌设备有限公司

XUZHOU FOISON SPRINKLER IRRIGATION EQUIPMENT CO.,LTD

ADD: HULOU INDUSTRIAL AREA, PEI COUNTY, JIANGSU PROVINCE, CHINA

WEBSITE: WWW.FOISON-IRRIGATION.COM

MAIL BOX: SALES@FOISON-IRRIGATION.COM



公众号二维码



沔收 喷灌设备

FOISON SPRINKLER
IRRIGATION EQUIPMENT

徐州沔收喷灌设备有限公司

XUZHOU FOISON SPRINKLER IRRIGATION EQUIPMENT CO.,LTD



COMPANY INTRODUCTION

FOISON IRRIGATION PROMOTE HARVEST

Xuzhou Foison Sprinkler Irrigation Equipment Co.,Ltd specializes in the production of irrigation equipment , impact & turbine sprinklers,pumps,industrial and mining dust-removal spray guns. The company has made unique achievements in the agricultural intelligent irrigation system industry, Technologies such as intelligent fertilizer and water integrated machines, intelligent gateways,wireless sensing,wireless decoding,wireless transmission, and wireless control have played an important role in modern agricultural irrigation. The company was founded in the ancient city of Pei County, we have strong technical force,sophisticated processing equipment,advanced production technology, and complete testing methods. It currently has

3 series and more than 100 products. Company honors and qualifications: High-tech enterprise, Technology small and medium-sized enterprise,Xuzhou new R&D Institution,Xuzhou Industrial Design Center,Xuzhou Product Technology Center, The 26th batch of new products and new technology product certifications in Jiangsu province, and passed ISO quality and environment, occupational safety and health three-system certification, Five-star after-sales service enterprise certification, etc. Our insists on putting customers first, and producing products that satisfy users is our company's sole purpose.

CORPORATE CULTURE



ENTERPRISE VALUE CONCEPT

The company is a community of interests of all FOISON people!



LEADERSHIP CONCEPT

Clarify strategy and demonstrate vision
 Straighten relationships and protect enthusiasm
 Cultivate culture and stimulate vitality.



LOYALTY CONCEPT

Responsible based on wisdom,rather than blind obedience and flattery without thought.



DEDICATION CONCEPT

Gratitude,Seriousness,Positivity,Collaboration.



TEAMWORK CONCEPT

Affinity and consistencey,Internal coordination, external adaptation
 Soar vigorously like and eagle, and assist in voyages like wild gese.

QUALIFICATION

- BUSINESS LICENSE
- HIGH-TECH ENTERPRISE CERTIFICATE
- FIVE-STAR AFTER-SALES SERVICE CERTIFICATE
- QUALITY MANAGEMENT SYSTEM CERTIFICATE
- ENVIRONMENTAL MANAGEMENT SYSTEM CERTIFICATE
- OCCUPATIONAL HEALTH & SAFETY MANAGEMENT SYSTEM CERTIFICATE



8
 ITEM
 INVENTIION PATENTS



27
 ITEM
 UTILITY MODEL PATENTS



26
 ITEM
 APPEARANCE PATENTS



PRODUCT INTRODUCTION

Horizontal impact sprinkler	06	High pressure irrigation hose	45
Vertical impact sprinkler	10	PVC Coated lay flat hose	46
Turbine sprinkler	17	Connector & clamp	47
Rain gun	31	Double wings micro-spray belt	48
Oriental lucky clouds turbine sprinkler	33	Nano nylon hose	48
Pump	41	Agriculture drip irrigation belt with perforated main water belt	49
Double wheels multi-sprinklers stand	42	Wings hose	49
Metal circle sprinkler	43	Micro-sprya belt	50
Reel sprinkling irrigation machine	44	Micro-spray belt under film	50



FS25
Horizontal impact
sprinkler

Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.15-0.4MPa
Useage	Agriculture,forestry,garden	Flow	1.2-6.1m³/h
Connector size	1" Inner screw	Radius	12.5-19.5m
Spray angle	24°	Sprinkler type	360°Gear adjustable

Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
5	0.15	1.2	12.5
	0.2	1.3	13.5
	0.3	1.6	15
	0.4	1.9	16.5
6	0.15	1.6	13
	0.2	1.9	14.5
	0.3	2.3	16.5
	0.4	2.7	17.5
7	0.15	2.2	14
	0.2	2.6	15
	0.3	3.1	17
	0.4	3.7	18.5
9	0.15	3.7	15
	0.2	4.3	16.5
	0.3	5.2	18.5
	0.4	6.1	19.5



FS25B
Double nozzles



FS30
Horizontal impact sprinkler

Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.15-0.5MPa
Useage	Agriculture,forestry,garden	Flow	5.1-24.8m³/h
Connector size	1-1/2"Inner screw	Radius	16-29m
Spray angle	24°	Sprinkler type	360°Gear adjustable

Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
8 7	0.15	5.1	16
	0.2	5.9	17.5
	0.3	7.2	19.5
	0.4	8.4	21
10 7	0.2	7.8	18
	0.3	9.5	21
	0.4	11	23
	0.5	12.4	24.5
12 7	0.2	10.1	19.5
	0.3	12.4	22
	0.4	14.3	25
	0.5	16.1	27.5
14 7	0.2	12.9	20.5
	0.3	15.8	23.5
	0.4	18.3	26
	0.5	20.5	28.5
16 7	0.2	16	21
	0.3	19.6	24
	0.4	22.7	26.5
	0.5	24.8	29

FS30B

Horizontal impact sprinkler



Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.15-0.5MPa
Useage	Agriculture,forestry,garden	Flow	3.7-18.6m³/h
Connector size	1-1/4"Inner screw	Radius	16.5-29m
Spray angle	24°	Sprinkler type	360°Gear adjustable

Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
8 4	0.15	3.7	16.5
	0.2	4.2	17.5
	0.3	5.2	19.5
	0.4	6	21
10 4	0.15	4.5	17
	0.2	5.3	18
	0.3	6.4	20
	0.4	7.4	21.5
12 4	0.2	6.4	19
	0.3	7.8	21
	0.4	9	22.5
	0.5	10.2	23.5
14 4	0.2	8.9	21
	0.3	10.9	23.5
	0.4	12.6	26
	0.5	14.2	28
16 4	0.2	11.8	22.5
	0.3	14.4	24
	0.4	16.7	27
	0.5	18.6	29

FS35

Horizontal impact sprinkler



Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.2-0.6MPa
Useage	Agriculture,forestry,garden	Flow	7.8-31.9m³/h
Connector size	1-1/2"Inner screw	Radius	18-36m
Spray angle	24°	Sprinkler type	360°Gear adjustable

Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
10 5	0.2	7.8	18
	0.3	9.5	21
	0.4	11	23
	0.5	12.4	24.5
12 5	0.2	9.1	20
	0.3	10.9	24
	0.4	12.6	27
	0.5	14.1	30
14 5	0.2	11.7	21
	0.3	14.3	25
	0.4	16.6	29
	0.5	18.5	31
16 5	0.2	14.8	22
	0.3	18.2	26
	0.4	21	30
	0.5	23.4	33
18 5	0.3	22.7	28
	0.4	26.2	31
	0.5	29.2	34
	0.6	31.9	36

FS40

Horizontal impact sprinkler



Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.15-0.5MPa
Useage	Agriculture,forestry,garden	Flow	9.5-39.4m³/h
Connector size	2"Inner screw	Radius	20-43m
Spray angle	24°	Sprinkler type	360°Gear adjustable

Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
12	0.15	9.5	20
	0.2	11	23
	0.3	13.4	27
	0.4	15.5	30
14	0.2	13.8	25
	0.3	16.8	29
	0.4	19.5	32
	0.5	21.8	34
16	0.2	16.9	27
	0.3	20.6	31
	0.4	23.9	34
	0.5	26.7	37
18	0.2	20.6	28
	0.3	26	33
	0.4	30.3	36
	0.5	33.6	40
20	0.2	24.6	29
	0.3	31.2	34
	0.4	36.3	38
	0.5	39.4	43

FS40-43°

Horizontal impact sprinkler



Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.3-0.8MPa
Useage	Industrial dust removal (Dock,power plant,coal mine)	Flow	16.8-52m³/h
Connector size	2"Inner screw	Radius	20-55m
Spray angle	43°	Sprinkler type	360°Gear adjustable

Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
14	0.3	16.8	20
	0.4	19.5	23
	0.5	21.8	27
	0.6	23.5	30
16	0.3	20.6	25
	0.4	23.9	29
	0.5	26.7	32
	0.6	30.1	34
18	0.4	30.3	27
	0.5	33.6	31
	0.6	36.2	34
	0.7	39	37
20	0.4	36.3	28
	0.5	39.4	33
	0.6	42.2	36
	0.7	45	40
22	0.4	42.8	29
	0.5	45.2	34
	0.6	47.6	38
	0.7	49.4	43
	0.8	52	55

FSY40

Horizontal impact sprinkler



Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.15-0.5MPa
Useage	Agriculture,forestry,garden	Flow	9.5-50.3m³/h
Connector size	2"Inner screw	Radius	20-46.5m
Spray angle	24°	Sprinkler type	360°Gear circle spray

Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
12 8	0.15	9.5	20
	0.2	11	23
	0.3	13.4	27
	0.4	15.5	30
	0.2	13.8	25
14 8	0.3	16.8	29
	0.4	19.5	32
	0.5	21.8	34
	0.2	16.9	27
16 8	0.3	20.6	31
	0.4	23.9	34
	0.5	26.7	37
18 8	0.2	20.6	28
	0.3	26	33
	0.4	30.3	36
	0.5	33.6	40
20 8	0.2	24.6	29
	0.3	31.2	34
	0.4	36.3	38
	0.5	39.4	43
22 8	0.2	35.4	34.5
	0.3	40.9	39
	0.4	45.9	44
	0.5	50.3	46.5

FS50-24°

Vertical impact sprinkler



Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.2-0.7MPa
Useage	Agriculture,forestry,garden	Flow	14.2-58.8
Connector size	2"Flange	Radius	27-55.2m
Spray angle	24°	Sprinkler type	360°Gear adjustable

Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
16	0.2	14.2	27
	0.3	17.5	32.2
	0.4	19.9	36
	0.5	22.8	39
	0.6	24.7	42.6
	0.7	26.6	44
18	0.2	17.9	29
	0.3	21.9	34
	0.4	25.5	38.4
	0.5	28.2	42
	0.6	30.9	45
	0.7	33.2	47.2
20	0.2	22.2	31
	0.3	26.7	36
	0.4	31.5	41.2
	0.5	35.1	44
	0.6	38.1	47.1
	0.7	42.2	49
22	0.2	26.8	33
	0.3	33.5	37.5
	0.4	37.9	43
	0.5	42.5	46
	0.6	46.5	49.5
	0.7	49.8	52
24	0.2	31.8	34
	0.3	39.5	40
	0.4	45.3	44.3
	0.5	50.3	48
	0.6	54.6	52
	0.7	58.8	55.2

FS50-43°

Vertical impact sprinkler



Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.3-0.8MPa
Useage	Industrial dust removal (Dock,power plant,coal mine)	Flow	17.5-63.3
Connector size	2"Flange	Radius	31-53m
Spray angle	43°	Sprinkler type	360°Gear adjustable

Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
16	0.3	17.5	31
	0.4	19.9	34
	0.5	22.8	36
	0.6	24.7	39
	0.7	26.6	41
18	0.8	28.5	42
	0.3	21.9	33
	0.4	25.5	36
	0.5	28.2	39
	0.6	30.9	41
	0.7	33.2	43
20	0.8	35.8	45
	0.3	25.8	35
	0.4	32.3	39
	0.5	35	41
	0.6	38.5	44
	0.7	41.5	46
22	0.8	44.5	48
	0.3	33.5	38
	0.4	37.9	41
	0.5	42.5	44
	0.6	46.5	46
	0.7	49.8	48
24	0.8	53.2	50
	0.3	39.5	40
	0.4	45.3	43.6
	0.5	50.3	46
	0.6	54.6	48
	0.7	58.8	51.5
	0.8	63.3	53

FS50L-24°

Vertical impact sprinkler



Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.2-0.7MPa
Useage	Agriculture,forestry,garden, Industrial dust removal	Flow	22.2-92.8
Connector size	2"Flange	Radius	31-63.5m
Spray angle	24°	Sprinkler type	360°Gear adjustable

Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
20	0.2	22.2	31
	0.3	26.7	36
	0.4	31.5	41.2
	0.5	35.1	44
	0.6	38.1	47.1
22	0.7	42.2	49
	0.2	26.8	33
	0.3	33.5	37.5
	0.4	37.9	43
	0.5	42.5	46
24	0.6	46.5	49.5
	0.7	49.8	52
	0.2	31.8	34
	0.3	39.5	40
	0.4	45.3	44.3
26	0.5	50.3	48
	0.6	54.6	52
	0.7	58.8	55.2
	0.2	37.5	36.6
	0.3	45.7	42
28	0.4	52.3	47
	0.5	58.9	51.5
	0.6	64.5	55
	0.7	69	58
	0.2	43.2	37
30	0.3	52.7	43
	0.4	61.1	49
	0.5	67.8	53.2
	0.6	74.6	57
	0.7	81	60

FS50L-43°

Vertical impact sprinkler



Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.3-0.8MPa
Useage	Industrial dust removal (Dock,power plant,coal mine)	Flow	17.5-98.9
Connector size	2"Flange	Radius	31-58.8m
Spray angle	43°	Sprinkler type	360° Gear Adjustabl

Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
20	0.3	17.5	31
	0.4	19.9	34
	0.5	22.8	36
	0.6	24.7	39
	0.7	26.6	41
22	0.8	28.5	42
	0.3	21.9	33
	0.4	25.5	36
	0.5	28.2	39
	0.6	30.9	41
24	0.7	33.2	43
	0.8	35.8	45
	0.3	25.8	35
	0.4	32.3	39
	0.5	35	41
26	0.6	38.5	44
	0.7	41.5	46
	0.8	44.5	48
	0.3	33.5	38
	0.4	37.9	41
28	0.5	42.5	44
	0.6	46.5	46
	0.7	49.8	48
	0.8	53.2	50
	0.3	39.5	40
30	0.4	45.3	43.6
	0.5	50.3	46
	0.6	54.6	48
	0.7	58.8	51.5
	0.8	63.3	53

FSC50

Vertical impact sprinkler



Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.15-0.7MPa
Useage	Agriculture,forestry,garden, Industrial dust removal	Flow	9-69.3m³/h
Connector size	2"Inner screw / flange	Radius	23-56m
Spray angle	24°	Sprinkler type	360° Gear Adjustabl
		Rotating speed	Adjustable

Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
14	0.15	9	23
	0.2	10.4	25
	0.3	12.7	29
16	0.4	14.7	32
	0.2	13.5	27
	0.3	16.5	32
18	0.4	19.2	36
	0.5	21.3	39
	0.2	17.1	29
20	0.3	21	33
	0.4	24.2	37
	0.5	27.1	41
22	0.2	21.2	30
	0.3	25.9	35
	0.4	30	39
24	0.5	33.6	43
	0.3	31.3	37
	0.4	36.2	41
26	0.5	40.5	45
	0.6	44.4	48
	0.3	37.3	38
28	0.4	43.2	43
	0.5	48.3	47
	0.6	52.9	50
30	0.4	54	47
	0.5	59.6	49
	0.6	64.5	53
	0.7	69.3	56

FSC50Multi-nozzle

Multi-nozzle sprinkler



Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.15-0.7MPa
Useage	Agriculture,forestry,garden, Industrial dust removal	Flow	9-69.3m³/h
Connector size	2"Inner screw / flange	Radius	23-56m
Spray angle	24°	Sprinkler type	360° Gear Adjustabl
Multi nozzle	Secondary nozzle compensation function	Rotating speed	Adjustable

Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
14	0.15	9	23
	0.2	10.4	25
	0.3	12.7	29
16	0.4	14.7	32
	0.2	13.5	27
	0.3	16.5	32
18	0.4	19.2	36
	0.5	21.3	39
	0.2	17.1	29
20	0.3	21	33
	0.4	24.2	37
	0.5	27.1	41
22	0.2	21.2	30
	0.3	25.9	35
	0.4	30	39
24	0.5	33.6	43
	0.3	31.3	37
	0.4	36.2	41
26	0.5	40.5	45
	0.6	44.4	48
	0.3	37.3	38
28	0.4	43.2	43
	0.5	48.3	47
	0.6	52.9	50
30	0.4	54	47
	0.5	59.6	49
	0.6	64.5	53
	0.7	69.3	56



FSC50L-43°

Vertical impact sprinkler

Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.3-0.8MPa
Useage	Industrial dust removal (Dock,power plant,coal mine)	Flow	17.5-98.9m³/h
Connector size	2"Inner screw / flange	Radius	31-58.8m
Spray angle	43°	Sprinkler type	360°Adjustable
		Rotating speed	Adjustable


Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
20	0.3	17.5	31
	0.4	19.9	34
	0.5	22.8	36
	0.6	24.7	39
	0.7	26.6	41
22	0.8	28.5	42
	0.3	21.9	33
	0.4	25.5	36
	0.5	28.2	39
	0.6	30.9	41
24	0.7	33.2	43
	0.8	35.8	45
	0.3	25.8	35
	0.4	32.3	39
	0.5	35	41
26	0.6	38.5	44
	0.7	41.5	46
	0.8	44.5	48
	0.3	33.5	38
	0.4	37.9	41
28	0.5	42.5	44
	0.6	46.5	46
	0.7	49.8	48
	0.8	53.2	50
	0.3	39.5	40
30	0.4	45.3	43.6
	0.5	50.3	46
	0.6	54.6	48
	0.7	58.8	51.5
	0.8	63.3	53
	0.3	60.2	47
	0.4	71.5	51
	0.5	78.3	53
	0.6	85.5	54
	0.7	92.8	56.3
	0.8	98.9	58.8

FSR50-18°

Vertical impact sprinkler

Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.25-0.6MPa
Useage	Agriculture,forestry,garden,Industrial dust removal	Flow	11.4-37.2m³/h
Connector size	2"Flange	Radius	25.5-43m
Spray angle	18°	Sprinkler type	360°Gear adjustable

Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
14.3	0.25	11.4	25.5
	0.3	12.4	28
	0.4	14.4	30
	0.5	16.1	33
	0.6	17.6	36
15.2	0.25	13.6	27
	0.3	15.9	29
	0.4	17.2	32
	0.5	19.3	35
	0.6	21.1	37
16.5	0.25	16	28
	0.3	17.6	30
	0.4	20.3	33
	0.5	22.7	36
	0.6	24.8	39
17.8	0.25	18.5	30
	0.3	20.3	31
	0.4	23.4	35
	0.5	26.1	38
	0.6	28.6	41
19.1	0.25	21.1	31
	0.3	23.1	33
	0.4	26.7	36
	0.5	29.9	39
	0.6	32.7	42
20.3	0.25	24	32
	0.3	26.3	34
	0.4	30.4	37
	0.5	34	41
	0.6	37.2	43

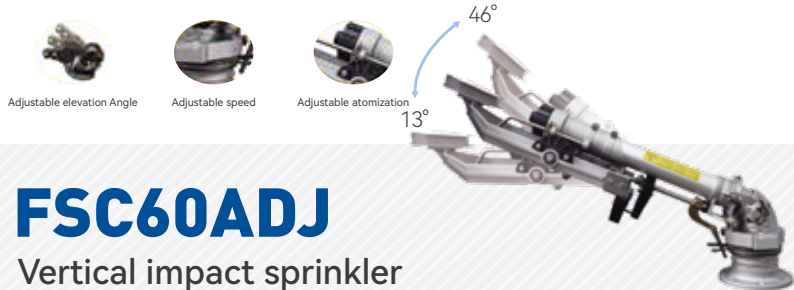


FSC60ADJ

Vertical impact sprinkler

Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.2-0.7MPa
Useage	Agriculture,forestry,Urban green land,Industrial dust removal	Flow	20.5-95.6m³/h
Connector size	60Flange	Radius	27-64.5m
Spray angle	13-46°Gear adjustable	Sprinkler type	360°Gear adjustable
Greatest advantage	It can work well in non horizontal flange conditions		Rotating speed Adjustable

Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
18	0.2	29	27
	0.3	32.5	34
	0.4	24.6	39
	0.5	30	43
	0.2	34.8	29
20	0.3	38.9	35
	0.4	29	41
	0.5	35.4	45
	0.2	41	31
	0.3	45.9	37
22	0.4	41.4	42
	0.5	48	47
	0.3	41.4	38
	0.4	48	44
	0.5	53.7	49
24	0.6	58.8	52
	0.3	48	42
	0.4	55.5	47
	0.5	62.2	51
	0.6	68.1	54
26	0.4	63.7	49.5
	0.5	71.3	52
	0.6	78	56
	0.7	84	59.5
	0.4	72.4	50
28	0.5	81	54
	0.6	88.7	58
	0.7	95.6	64.5
30	0.4	72.4	50
	0.5	81	54
	0.6	88.7	58
	0.7	95.6	64.5

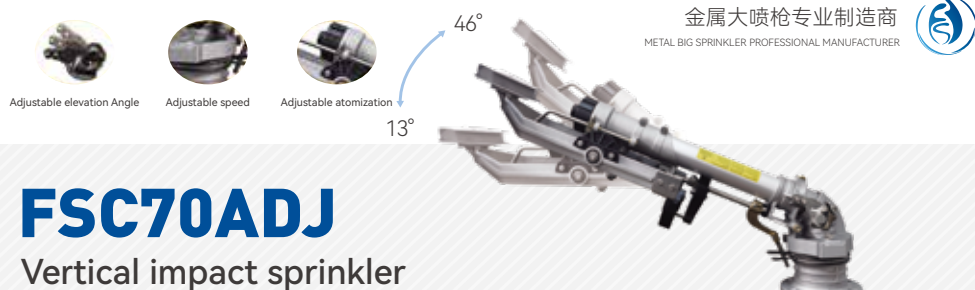

FSC70ADJ

Vertical impact sprinkler

Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.2-0.8MPa
Useage	Agriculture,forestry,Urban green land,Industrial dust removal	Flow	20.5-153.6m³/h
Connector size	70Flange	Radius	27-74.8m
Spray angle	13-46°Gear adjustable	Sprinkler type	360°Gear adjustable
Greatest advantage	It can work well in non horizontal flange conditions		Rotating speed Adjustable

Nozzle diameter	Pressure	Flow	Range	Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m	mm	MPa	m³/h	m
18	0.2	20.5	27	28	0.4	63.7	49.5
	0.3	25.1	34		0.5	71.3	52
	0.4	29	39		0.6	78	56
	0.5	32.5	43		0.7	84	59.5
	0.2	24.6	29	30	0.4	72.4	50
20	0.3	30	35		0.5	81	54
	0.4	34.8	41		0.6	88.7	58
	0.5	38.9	45		0.7	95.6	62.5
	0.2	29	31	32	0.4	81.7	52
22	0.3	35.4	37		0.5	91.3	56
	0.4	41	42		0.6	100	59.5
	0.5	45.9	47		0.7	107.9	63
	0.3	41.4	38	34	0.5	102.5	57.5
24	0.4	48	44		0.6	112.3	61
	0.5	53.7	49		0.7	121	64.5
	0.6	58.8	52		0.8	129.7	68
	0.3	41.4	38	36	0.5	115	59.5
26	0.4	48	44		0.6	135.3	67.5
	0.5	53.7	49		0.7	144	72
	0.6	58.8	52		0.8	153.6	74.8
	0.3	48	42				
	0.4	55.5	47				
	0.5	62.2	51				
	0.6	68.1	54				
	0.4	63.7	49.5				
	0.5	71.3	52				
28	0.6	78	56				
	0.7	84	59.5				
	0.4	72.4	50				
	0.5	81	54				
	0.6	88.7	58				
30	0.7	95.6	64.5				

FS80

Vertical impact sprinkler

Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.3-0.8MPa
Useage	Agriculture,forestry,garden,Industrial dust removal	Flow	31.3-174m³/h
Connector size	80Flange	Radius	23-80m
Spray angle	16°-46°Gear adjustable	Sprinkler type	360°Gear adjustable
		Rotating speed	Adjustable



Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
22	0.3	31.3	23
	0.4	36.2	25
	0.5	40.5	29
	0.6	44.4	32
24	0.3	37.3	27
	0.4	43.2	32
	0.5	48.3	36
	0.6	52.9	39
26	0.3	43.9	29
	0.4	50.7	33
	0.5	56.7	37
	0.6	62.2	41
28	0.3	50.9	30
	0.4	58.8	35
	0.5	65.7	39
	0.6	72.1	43
30	0.3	58.4	37
	0.4	67.6	41
	0.5	75.6	45
	0.6	82.8	48

Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
32	0.4	76.9	54
	0.5	85.9	58
	0.6	94.2	62
	0.7	101.6	66
34	0.5	97.1	59
	0.6	106.4	64
	0.7	114.8	68
	0.8	122.8	72
36	0.5	108.8	61
	0.6	119.3	66
	0.7	128.6	70
	0.8	137.7	74
38	0.5	121.3	63
	0.6	132.9	68
	0.7	143.4	72
	0.8	153.5	76
40	0.5	134.4	65
	0.6	147.3	69
	0.7	165.8	77
	0.8	174	80

FS100

Vertical impact sprinkler

Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.5-1.0MPa
Useage	Agriculture,forestry,garden,Industrial dust removal	Flow	108.8-322m³/h
Connector size	85Flange	Radius	65-99m
Spray angle	15°-35°Gear adjustable	Sprinkler type	360°Gear adjustable
		Rotating speed	Adjustable



Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
36	0.5	108.8	65
	0.6	119.3	68
	0.7	128.6	72
	0.8	137.7	77
38	0.5	121.3	66
	0.6	132.9	69.5
	0.7	143.4	74
	0.8	153.5	78.5
40	0.6	147.3	71
	0.7	158.9	76
	0.8	170	80
	0.9	180.3	82
42	0.6	162.3	72
	0.7	175.1	77.5
	0.8	187.4	82
	0.9	198.8	86

Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
44	0.6	178.1	74
	0.7	192.2	80
	0.8	205.6	85
	0.9	218.1	90
46	0.6	194.8	75
	0.7	210.2	82
	0.8	224.9	88
	1.0	251.6	93
48	0.6	212.1	76
	0.7	228.8	83
	0.8	244.9	89
	1.0	273.9	95
50	0.6	250	83
	0.7	271	89
	0.8	289	94
	1.0	322	99



FSW40

Turbine spray sprinkler

Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.2-0.5MPa
Useage	Industrial dust removal (Dock,power plant,coal mine)	Flow	9.5-37m³/h
Connector size	1-1/2"Inner screw	Radius	22-41m
Spray angle	24°	Sprinkler type	360°Gear adjustable

Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
12	0.2	9.5	22
	0.3	11.6	25
	0.4	13.4	28
	0.5	15.1	31
14	0.2	11.7	24
	0.3	15	27
	0.4	17.4	30
	0.5	19.4	33
16	0.2	15.4	26
	0.3	18.9	29
	0.4	21.8	32
	0.5	24.3	35
18	0.2	19	28
	0.3	24.2	31
	0.4	28.3	34
	0.5	31.3	37
20	0.2	21.2	30
	0.3	29.4	33
	0.4	34.3	37
	0.5	37	41

FSW40 PRO

Turbine spray sprinkler(Sigle/double gear)

FSW40ADJ_{Multi-nozzle}

Multi nozzle Turbine spray sprinkler

Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	02-0.5MPa
Useage	Agriculture,forestry,garden, Industrial dust removal	Flow	9.5-37m³/h
Connector size	1-1/2"Inner screw	Radius	22-41m
Spray angle	Main nozzle,0°-48 ° adjustable,secondary nozzle universal adjustable	Sprinkler type	360°Gear adjustable

Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
12	0.2	9.5	22
	0.3	11.6	25
	0.4	13.4	28
	0.5	15.1	31
14	0.2	11.7	24
	0.3	15	27
	0.4	17.4	30
	0.5	19.4	33
16	0.2	15.4	26
	0.3	18.9	29
	0.4	21.8	32
	0.5	24.3	35
18	0.2	19	28
	0.3	24.2	31
	0.4	28.3	34
	0.5	31.3	37
20	0.2	21.2	30
	0.3	29.4	33
	0.4	34.3	37
	0.5	37	41



Main nozzle spray angle adjustable
Secondary nozzle universal adjustable



FSW45

Turbine spray sprinkler (Screw type)

Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.2-0.7MPa
Useage	Agriculture,forestry,garden, Industrial dust removal	Flow	9.5-49.8m³/h
Connector size	1.5"/2"Inner screw	Radius	22-51m
Spray angle	24°	Sprinkler type	360°Gear adjustable

Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
12	0.2	9.5	22
	0.3	11.6	25
	0.4	13.4	28
	0.5	15.1	31
14	0.2	11.7	24
	0.3	15	27
	0.4	17.4	30
	0.5	19.4	33
16	0.2	15.4	26
	0.3	18.9	29
	0.4	21.8	32
	0.5	24.3	35
18	0.2	19	28
	0.3	24.2	31
	0.4	28.3	34
	0.5	31.3	37
20	0.2	21.2	30
	0.3	29.4	33
	0.4	34.3	37
	0.5	37	41
22	0.4	37.9	43
	0.5	42.5	46
	0.6	46.5	49.5
	0.7	49.8	51

FSW45

Turbine spray sprinkler (Flange type)

Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.2-0.7MPa
Useage	Agriculture,forestry,garden, Industrial dust removal	Flow	9.5-49.8m³/h
Connector size	40Flange	Radius	22-51m
Spray angle	24°	Sprinkler type	360°Gear adjustable



FSW45ADJ

Turbine spray sprinkler (Flange type)

Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.2-0.7MPa
Useage	Agriculture,forestry,garden, Industrial dust removal	Flow	9.5-49.8m³/h
Connector size	40Flange	Radius	22-51m
Spray angle	0°-48°Gear adjustable	Sprinkler type	360°Gear adjustable



Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
12	0.2	9.5	22
	0.3	11.6	25
	0.4	13.4	28
	0.5	15.1	31
14	0.2	11.7	24
	0.3	15	27
	0.4	17.4	30
	0.5	19.4	33
16	0.2	15.4	26
	0.3	18.9	29
	0.4	21.8	32
	0.5	24.3	35
18	0.2	19	28
	0.3	24.2	31
	0.4	28.3	34
	0.5	31.3	37
20	0.2	21.2	30
	0.3	29.4	33
	0.4	34.3	37
	0.5	37	41
22	0.4	37.9	43
	0.5	42.5	46
	0.6	46.5	49.5
	0.7	49.8	51



FSW45ADJ

Turbine spray sprinkler (Screw type)

Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.2-0.7MPa
Useage	Agriculture,forestry,garden, Industrial dust removal	Flow	9.5-49.8m³/h
Connector size	1.5"/2"Inner screw	Radius	22-51m
Spray angle	0°-48°Gear adjustable	Sprinkler type	360°Gear adjustable

FSN50

Turbine spray sprinkler (High speed type)



Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.2-0.8MPa
Useage	Agriculture,forestry,garden, Industrial dust removal	Flow	17.8-79.7m³/h
Connector size	2"Flange	Radius	26-56m
Spray angle	24°	Sprinkler type	360°Gear adjustable

Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
16	0.2	17.8	26
	0.3	21.8	28
	0.4	25.2	32
	0.5	28.1	35
18	0.3	27.1	32
	0.4	31.6	35
	0.5	35	38
	0.6	38.7	41
20	0.3	31.2	36
	0.4	36	40
	0.5	40.3	43
	0.6	44	46
22	0.4	42.2	41
	0.45	44.8	43
	0.5	47.3	45
	0.6	51.8	48
24	0.4	49.2	43
	0.45	52.2	45
	0.5	55	47
	0.6	60.3	50
26	0.5	62.3	47
	0.6	67.8	51
	0.7	74.9	53
	0.8	79.7	56


FSN50

Turbine spray sprinkler (Normal speed type)



FSN50ADJMulti-nozzle

Turbine spray sprinkler (Red)

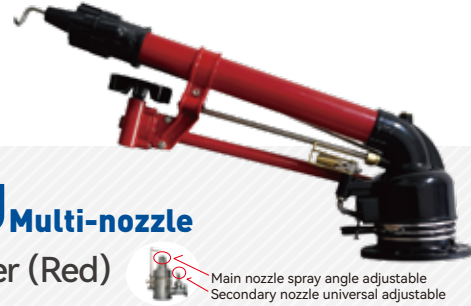

Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.2-0.8MPa
Useage	Agriculture,forestry,garden, Industrial dust removal	Flow	17.8-82.3m³/h
Connector size	2"Flange	Radius	26-56m
Spray angle	Main nozzle 0°-48° adjustable,secondary nozzle universal adjustable	Sprinkler type	360°Gear adjustable

Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
16	0.2	17.8	26
	0.3	21.8	28
	0.4	25.2	32
	0.5	28.1	35
18	0.3	27.1	32
	0.4	31.6	35
	0.5	35	38
	0.6	38.7	41
20	0.3	31.2	36
	0.4	36	40
	0.5	40.3	43
	0.6	44	46
22	0.4	42.2	41
	0.45	44.8	43
	0.5	47.3	45
	0.6	51.8	48
24	0.4	49.2	43
	0.45	52.2	45
	0.5	55	47
	0.6	60.3	50
26	0.5	62.3	47
	0.6	67.8	51
	0.7	74.9	53
	0.8	82.3	56



FSN50ADJMulti-nozzle

Multi nozzle Turbine spray sprinkler (Red)



Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.2-0.8MPa
Useage	Agriculture,forestry,garden, Industrial dust removal	Flow	17.8-82.3m³/h
Connector size	2"Flange	Radius	26-56m
Spray angle	Main nozzle 0°-48° adjustable,secondary nozzle universal adjustable	Sprinkler type	360°Gear adjustable
Rotating speed	Speed adjustable		

Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
16	0.2	17.8	26
	0.3	21.8	28
	0.4	25.2	32
	0.5	28.1	35
18	0.3	27.1	32
	0.4	31.6	35
	0.5	35	38
	0.6	38.7	41
20	0.3	31.2	36
	0.4	36	40
	0.5	40.3	43
	0.6	44	46
22	0.4	42.2	41
	0.45	44.8	43
	0.5	47.3	45
	0.6	51.8	48
24	0.4	49.2	43
	0.45	52.2	45
	0.5	55	47
	0.6	60.3	50
26	0.5	62.3	47
	0.6	67.8	51
	0.7	74.9	53
	0.8	82.3	56




FSN50ADJ Multi-nozzle

Multi nozzle Turbine spray sprinkler
(Yellow)

Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.2-0.7MPa
Useage	Agriculture,forestry,garden, Industrial dust removal	Flow	17.8-79.7m³/h
Connector size	2"Flange	Radius	26-56m
Spray angle	Main nozzle 0°-48° adjustable,secondary nozzle universal adjustable	Sprinkler type	360°Gear adjustable
Rotating speed	Speed adjustable		

Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
16	0.2	17.8	26
	0.3	21.8	28
	0.4	25.2	32
	0.5	28.1	35
18	0.3	27.1	32
	0.4	31.6	35
	0.5	35	38
	0.6	38.7	41
20	0.3	31.2	36
	0.4	36	40
	0.5	40.3	43
	0.6	44	46
22	0.4	42.2	41
	0.45	44.8	43
	0.5	47.3	45
	0.6	51.8	48
24	0.4	49.2	43
	0.45	52.2	45
	0.5	55	47
	0.6	60.3	50
26	0.5	62.3	47
	0.6	67.8	51
	0.7	74.9	53
	0.8	79.7	56



FSN50ADJ Multi-nozzle

Turbine spray sprinkler (Yellow)

Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.2-0.7MPa
Useage	Agriculture,forestry,garden, Industrial dust removal	Flow	17.8-79.7m³/h
Connector size	2"Flange	Radius	26-56m
Spray angle	Main nozzle 0°-48° adjustable,secondary nozzle universal adjustable	Sprinkler type	360°Gear adjustable

Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
16	0.2	17.8	26
	0.3	21.8	28
	0.4	25.2	32
	0.5	28.1	35
18	0.3	27.1	32
	0.4	31.6	35
	0.5	35	38
	0.6	38.7	41
20	0.3	31.2	36
	0.4	36	40
	0.5	40.3	43
	0.6	44	46
22	0.4	42.2	41
	0.45	44.8	43
	0.5	47.3	45
	0.6	51.8	48
24	0.4	49.2	43
	0.45	52.2	45
	0.5	55	47
	0.6	60.3	50
26	0.5	62.3	47
	0.6	67.8	51
	0.7	74.9	53
	0.8	79.7	56



FSN50ADJ

Turbine spray sprinkler (Green)

Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.2-0.7MPa
Useage	Agriculture,forestry,garden, Industrial dust removal	Flow	17.8-80m³/h
Connector size	2"Flange	Radius	26-53m
Spray angle	Main nozzle 0°-48°	Sprinkler type	360°Gear adjustable

Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
16	0.2	17.8	26
	0.3	21.8	28
	0.4	25.2	32
	0.5	28.1	35
18	0.3	27.1	32
	0.4	31.6	35
	0.5	35	38
	0.6	38.7	41
20	0.3	31.2	36
	0.4	36	40
	0.5	40.3	43
	0.6	44	46
22	0.4	42.2	41
	0.45	44.8	43
	0.5	47.3	45
	0.6	51.8	48
24	0.4	49.2	43
	0.45	52.2	45
	0.5	55	47
	0.6	60.3	50
26	0.4	56.7	45
	0.5	63.4	48
	0.6	69.6	51
	0.7	80	56



FSW55S Atomization King

Turbo Worm Gear Spray Gun with Multiple Nozzles

Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.2-0.8MPa
Useage	Agriculture,forestry,garden, Industrial dust removal	Flow	17.8-89.7m³/h
Connector size	2"Flange	Radius	26-56m
Spray angle	0°-48Gear adjustable	Sprinkler type	360°Gear adjustable

Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
16	0.2	17.8	26
	0.3	21.8	28
	0.4	25.2	32
	0.5	28.1	35
18	0.3	27.1	32
	0.4	31.6	35
	0.5	35	38
	0.6	38.7	41
20	0.3	31.2	36
	0.4	36	40
	0.5	40.3	43
	0.6	44	46
22	0.4	42.2	41
	0.45	44.8	43
	0.5	47.3	45
	0.6	51.8	48
24	0.4	49.2	43
	0.45	52.2	45
	0.5	55	47
	0.6	60.3	50
26	0.5	72.3	47
	0.6	77.8	51
	0.7	84.9	53
	0.8	89.7	56

FSW55S PRO Atomization King

Multi-nozzle Turbo Worm Drive Spray Gun

Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.2-0.8MPa
Useage	Agriculture,forestry,garden, Industrial dust removal	Flow	17.8-89.7m³/h
Connector size	2"Flange	Radius	26-56m
Spray angle	Main nozzle 0°-48° adjustable,secondary nozzle universal adjustable	Sprinkler type	360°Gear adjustable

Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
16	0.2	17.8	26
	0.3	21.8	28
	0.4	25.2	32
	0.5	28.1	35
18	0.3	27.1	32
	0.4	31.6	35
	0.5	35	38
	0.6	38.7	41
20	0.3	31.2	36
	0.4	36	40
	0.5	40.3	43
	0.6	44	46
22	0.4	42.2	41
	0.45	44.8	43
	0.5	47.3	45
	0.6	51.8	48
24	0.4	49.2	43
	0.45	52.2	45
	0.5	55	47
	0.6	60.3	50
26	0.5	72.3	47
	0.6	77.8	51
	0.7	84.9	53
	0.8	89.7	56



Multi-nozzle design



Dual-nozzle design with adjustable elevation angle
Dual water breakers with adjustable elevation angle



Dual spray tube design
One spray gun delivers two spraying effects

FSW60ADJ

Dual-nozzle Adjustable Elevation Angle Worm Gear Spray Gun

Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.2-0.7MPa
Useage	Agriculture,forestry,garden, Industrial dust removal	Flow	19-99.6m³/h
Connector size	2"Flange	Radius	22-51m
Spray angle	0°-48Gear adjustable	Sprinkler type	360°Gear adjustable

Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
12	0.2	19	22
	0.3	23.2	25
	0.4	26.8	28
	0.5	30.2	31
14	0.2	23.4	24
	0.3	30	27
	0.4	34.8	30
	0.5	38.8	33
16	0.2	30.8	26
	0.3	37.8	29
	0.4	43.6	32
	0.5	48.6	35
18	0.2	38	28
	0.3	48.4	31
	0.4	56.6	34
	0.5	62.6	37
20	0.2	42.4	30
	0.3	58.8	33
	0.4	68.6	37
	0.5	74	41
22	0.4	75.8	43
	0.5	85	46
	0.6	93	49.5
	0.7	99.6	51



Multifunctional Atomizing Water Channel



Dual Water Splitter with Adjustable Elevation Angle
Dual Nozzle Design with Adjustable Elevation Angle



FSW60ADJ PRO

Dual-nozzle Adjustable Elevation Angle Worm Gear Spray Gun

Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.2-0.7MPa
Useage	Agriculture,forestry,garden, Industrial dust removal	Flow	19-99.6m³/h
Connector size	2"Flange	Radius	22-51m
Spray angle	0°-48Gear adjustable	Sprinkler type	360°Gear adjustable

Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
12	0.2	19	22
	0.3	23.2	25
	0.4	26.8	28
	0.5	30.2	31
14	0.2	23.4	24
	0.3	30	27
	0.4	34.8	30
	0.5	38.8	33
16	0.2	30.8	26
	0.3	37.8	29
	0.4	43.6	32
	0.5	48.6	35
18	0.2	38	28
	0.3	48.4	31
	0.4	56.6	34
	0.5	62.6	37
20	0.2	42.4	30
	0.3	58.8	33
	0.4	68.6	37
	0.5	74	41
22	0.4	75.8	43
	0.5	85	46
	0.6	93	49.5
	0.7	99.6	51

FSW65ADJ

Turbo Worm Gear Spray Gun with Multiple Nozzles



Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.2-0.8MPa
Useage	Agriculture,forestry,garden, Industrial dust removal	Flow	17.8-89.7m³/h
Connector size	2"Flange	Radius	26-56m
Spray angle	0°-48Gear adjustable	Sprinkler type	360°Gear adjustable

Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
16	0.2	17.8	26
	0.3	21.8	28
	0.4	25.2	32
	0.5	28.1	35
18	0.3	27.1	32
	0.4	31.6	35
	0.5	35	38
	0.6	38.7	41
20	0.3	31.2	36
	0.4	36	40
	0.5	40.3	43
	0.6	44	46
22	0.4	42.2	41
	0.45	44.8	43
	0.5	47.3	45
	0.6	51.8	48
24	0.4	49.2	43
	0.45	52.2	45
	0.5	55	47
	0.6	60.3	50
26	0.5	72.3	47
	0.6	77.8	51
	0.7	84.9	53
	0.8	89.7	56

FSW65ADJ PRO

Multi-nozzle Turbo Worm Drive Spray Gun



Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.2-0.8MPa
Useage	Agriculture,forestry,garden, Industrial dust removal	Flow	17.8-89.7m³/h
Connector size	2"Flange	Radius	26-56m
Spray angle	0°-48Gear adjustable	Sprinkler type	360°Gear adjustable

FSW70

Turbine spray sprinkler



Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.2-0.8MPa
Useage	Agriculture,forestry,garden, Industrial dust removal	Flow	20.5-144m³/h
Connector size	70Flange	Radius	27-72m
Spray angle	24°	Sprinkler type	360°Gear adjustable

Nozzle diameter	Pressure	Flow	Range	Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m	mm	MPa	m³/h	m
18	0.2	20.5	27	28	0.4	63.7	49.5
	0.3	25.1	34		0.5	71.3	52
	0.4	29	39		0.6	78	56
	0.5	32.5	43		0.7	84	59.5
20	0.2	24.6	29	30	0.4	72.4	50
	0.3	30	35		0.5	81	54
	0.4	34.8	41		0.6	88.7	58
	0.5	38.9	45		0.7	95.6	62.5
22	0.2	29	31	32	0.4	81.7	52
	0.3	35.4	37		0.5	91.3	56
	0.4	41	42		0.6	100	59.5
	0.5	45.9	47		0.7	107.9	63
24	0.3	41.4	38	34	0.5	102.5	57.5
	0.4	48	44		0.6	112.3	61
	0.5	53.7	49		0.7	121	64.5
	0.6	58.8	52		0.8	129.7	68
26	0.3	48	42	36	0.5	115	59.5
	0.4	55.5	47		0.6	124.5	63
	0.5	62.2	51		0.7	135	67.5
	0.6	68.1	54		0.8	144	72

FSW70ADJ

Turbine spray sprinkler



Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.4-0.8MPa
Useage	Agriculture,forestry,garden, Industrial dust removal	Flow	63.7-144m³/h
Connector size	70Flange	Radius	49.5-72m
Spray angle	0°-48Gear adjustable	Sprinkler type	360°Gear adjustable

FSW70-43°

Turbine spray sprinkler



Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.2-0.9MPa
Useage	Industrial dust removal (Dock,power plant,coal mine)	Flow	20.5-152m³/h
Connector size	70Flange	Radius	27-70m
Spray angle	43°	Sprinkler type	360°Gear adjustable

Nozzle diameter	Pressure	Flow	Range	Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m	mm	MPa	m³/h	m
18	0.2	20.5	27	28	0.4	63.7	49.5
	0.3	25.1	34		0.5	71.3	52
	0.4	29	39		0.6	78	56
	0.5	32.5	43		0.7	84	59.5
20	0.2	24.6	29	30	0.4	72.4	50
	0.3	30	35		0.5	81	54
	0.4	34.8	41		0.6	88.7	58
	0.5	38.9	45		0.7	95.6	62.5
22	0.2	29	31	32	0.4	81.7	52
	0.3	35.4	37		0.5	91.3	56
	0.4	41	42		0.6	100	59.5
	0.5	45.9	47		0.7	107.9	63
24	0.3	41.4	38	34	0.5	102.5	57.5
	0.4	48	44		0.6	112.3	61
	0.5	53.7	49		0.7	121	64.5
	0.6	58.8	52		0.8	129.7	68
26	0.3	48	42	36	0.6	121	62
	0.4	55.5	47		0.7	133	64.8
	0.5	62.2	51		0.8	145	68.2
	0.6	68.1	54		0.9	152	70

FSW75ADJMulti-nozzle

Turbine spray sprinkler



Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.2-0.8MPa
Useage	Agriculture,forestry,garden, Industrial dust removal	Flow	20.5-144m³/h
Connector size	75Flange	Radius	27-72m
Spray angle	Main nozzle 0°-48° adjustable,secondary nozzle universal adjustable	Sprinkler type	360°Gear adjustable

Nozzle diameter	Pressure	Flow	Range	Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m	mm	MPa	m³/h	m
18	2	20.5	27	28	4	63.7	49.5
	3	25.1	34		5	71.3	52
	4	29	39		6	78	56
	5	32.5	43		7	84	59.5
20	2	24.6	29	30	4	72.4	50
	3	30	35		5	81	54
	4	34.8	41		6	88.7	58
	5	38.9	45		7	95.6	62.5
22	2	29	31	32	4	81.7	52
	3	35.4	37		5	91.3	56
	4	41	42		6	100	59.5
	5	45.9	47		7	107.9	63
24	3	41.4	38	34	5	102.5	57.5
	4	48	44		6	112.3	61
	5	53.7	49		7	121	64.5
	6	58.8	52		8	129.7	68
26	3	48	42	36	5	115	59.5
	4	55.5	47		6	124.5	63
	5	62.2	51		7	135	67.5
	6	68.1	54		8	144	72

FSW80

Turbine spray sprinkler



Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.3-0.9MPa
Useage	Agriculture,forestry,garden, Industrial dust removal	Flow	31.3-198.8m³/h
Connector size	80Flange	Radius	23.3-85.7m
Spray angle	24°	Sprinkler type	360°Gear adjustable

Nozzle diameter	Pressure	Flow	Range	Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m	mm	MPa	m³/h	m
22	0.3	31.3	23.3	32	0.4	76.9	54.2
	0.4	36.2	25		0.5	85.9	58
	0.5	40.5	29.4		0.6	94.2	62.9
	0.6	44.4	32		0.7	101.6	66
24	0.3	37.3	27.9	34	0.5	97.1	59.1
	0.4	43.2	32		0.6	106.4	64
	0.5	48.3	36.1		0.7	114.8	68.2
	0.6	52.9	39		0.8	122.8	72
26	0.3	43.9	29.2	36	0.5	108.8	61.5
	0.4	50.7	33		0.6	119.3	66
	0.5	56.7	37.3		0.7	128.6	70.2
	0.6	62.2	41		0.8	137.7	74
28	0.3	50.9	30	38	0.5	121.3	63
	0.4	58.8	35.7		0.6	132.9	68.1
	0.5	65.7	39		0.7	143.4	72
	0.6	72.1	43.2		0.8	153.5	76.3
30	0.3	58.4	37	40	0.6	148	69
	0.4	67.6	41.4		0.7	165.2	75.2
	0.5	75.6	45		0.8	174	80
	0.6	82.8	48.6		0.9	198.8	85.7

PY30

Rain gun



Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper, nodular cast iron,ss,nylon	Work pressure	0.2-0.45MPa
Useage	Agriculture,forestry,garden, Industrial dust removal	Flow	7.1-9.3m³/h
Connector size	1-1/2"Inner screw	Radius	19.5-25.3m
Inlet	Copper core/Aluminum core	Sprinkler type	360°Gear adjustable

PY40

Rain gun



Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper, nodular cast iron,ss,nylon	Work pressure	0.3-0.5MPa
Useage	Agriculture,forestry,garden, Industrial dust removal	Flow	15.2-25.5m³/h
Connector size	2"Inner screw	Radius	25.1-30.3m
Inlet	Copper core/Aluminum core	Sprinkler type	360°Gear adjustable

PY40 PRO

Rain gun

Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper, nodular cast iron,ss,nylon	Work pressure	0.3-0.5MPa
Useage	Agriculture,forestry,garden, Industrial dust removal	Flow	20.2-33.9m³/h
Connector size	2"Inner screw	Radius	25.1-30.3m
Inlet	Copper core/Aluminum core	Sprinkler type	360°Gear adjustable



PY50

Rain gun

Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper, nodular cast iron,ss,nylon	Work pressure	0.3-0.55MPa
Useage	Agriculture,forestry,garden, Industrial dust removal	Flow	28.6-36.5m³/h
Connector size	2.5"Inner screw	Radius	30-42m
Inlet	Copper core/Aluminum core	Sprinkler type	360°Gear adjustable



PY50 PRO

Rain gun

Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper, nodular cast iron,ss,nylon	Work pressure	0.3-0.55MPa
Useage	Agriculture,forestry,garden, Industrial dust removal	Flow	38-48.5m³/h
Connector size	2.5"Inner screw	Radius	30-42m
Inlet	Copper core/Aluminum core	Sprinkler type	360°Gear adjustable



FSW45ADJ-S

Multi nozzle Turbine spray sprinkler
(Luxury edition)



Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.2-0.7MPa
Useage	Agriculture,forestry,garden,Industrial dust removal	Flow	9.5-49.8m³/h
Connector size	1.5"/2"Inner screw/40flange	Radius	22-51m
Spray advantage	Main nozzle 0°-48°adjustable,secondary nozzle universal adjustable	Sprinkler type	360°Gear adjustable
		Rotating speed	Fast/slow gear shifting+speed adjustable

Patent

Adjustable speed and slow

Main nozzle spray angle adjustable
Secondary nozzle universal adjustable


CVT

Design of groove nozzle

Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
12	0.2	9.5	22
	0.3	11.6	25
	0.4	13.4	28
	0.5	15.1	31
14	0.2	11.7	24
	0.3	15	27
	0.4	17.4	30
	0.5	19.4	33
16	0.2	15.4	26
	0.3	18.9	29
	0.4	21.8	32
	0.5	24.3	35
18	0.2	19	28
	0.3	24.2	31
	0.4	28.3	34
	0.5	31.3	37
20	0.2	21.2	30
	0.3	29.4	33
	0.4	34.3	37
	0.5	37	41
22	0.4	37.9	43
	0.5	42.5	46
	0.6	46.5	49.5
	0.7	49.8	51

FSW45ADJ-S

Multi nozzle Turbine spray sprinkler
(Exalted edition)

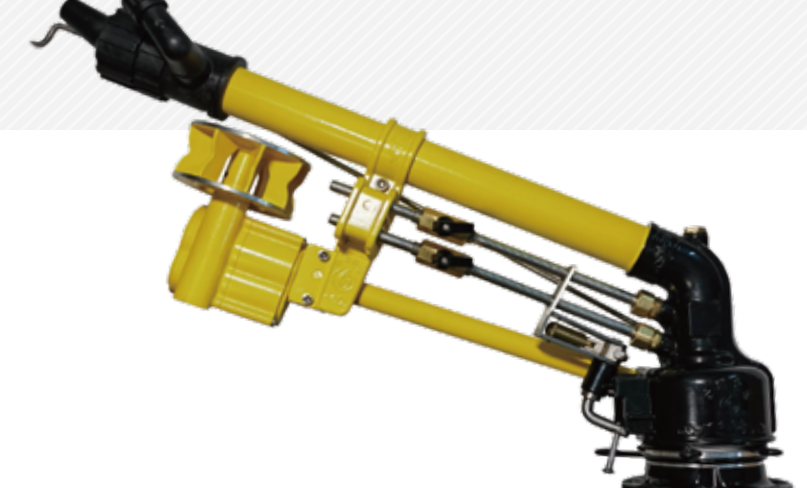

Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.2-0.7MPa
Useage	Agriculture,forestry,garden,Industrial dust removal	Flow	9.5-49.8m³/h
Connector size	1.5"/2"Inner screw/40flange	Radius	22-51m
Spray advantage	Main nozzle 0°-48°adjustable,secondary nozzle universal adjustable	Sprinkler type	360°Gear adjustable
		Rotating speed	Multi gear shifting+CVT adjustable

Patent

Double-impeller, large bearing area

Main nozzle spray angle adjustable
Secondary nozzle universal adjustable

Double-CVT technology

Multi gear shifting box

Design of groove nozzle

Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
12	0.2	9.5	22
	0.3	11.6	25
	0.4	13.4	28
	0.5	15.1	31
14	0.2	11.7	24
	0.3	15	27
	0.4	17.4	30
	0.5	19.4	33
16	0.2	15.4	26
	0.3	18.9	29
	0.4	21.8	32
	0.5	24.3	35
18	0.2	19	28
	0.3	24.2	31
	0.4	28.3	34
	0.5	31.3	37
20	0.2	21.2	30
	0.3	29.4	33
	0.4	34.3	37
	0.5	37	41
22	0.4	37.9	43
	0.5	42.5	46
	0.6	46.5	49.5
	0.7	49.8	51

FSN50ADJ-S

Multi nozzle Turbine spray sprinkler
(Luxury edition)



Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.2-0.8MPa
Useage	Agriculture,forestrygarden, Industrial dust removal	Flow	17.8-79.7m³/h
Connector size	2"Flange	Radius	26-56m
Spray advantage	Main nozzle 0°-48°adjustable, secondary nozzle universal adjustable	Sprinkler type	360°Gear adjustable
		Rotating speed	Multi gear shifting+ CVT adjustable

Patent



Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
16	0.2	17.8	26
	0.3	21.8	28
	0.4	25.2	32
	0.5	28.1	35
18	0.3	27.1	32
	0.4	31.6	35
	0.5	35	38
	0.6	38.7	41
20	0.3	31.2	36
	0.4	36	40
	0.5	40.3	43
	0.6	44	46
22	0.4	42.2	41
	0.45	44.8	43
	0.5	47.3	45
	0.6	51.8	48
24	0.4	49.2	43
	0.45	52.2	45
	0.5	55	47
	0.6	60.3	50
26	0.5	62.3	47
	0.6	67.8	51
	0.7	74.9	53
	0.8	79.7	56


FSN55ADJ-S

Multi nozzle Turbine spray sprinkler
(Exalted edition)



Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.2-0.8MPa
Useage	Agriculture,forestrygarden, Industrial dust removal	Flow	17.8-79.7m³/h
Connector size	2"Flange	Radius	26-56m
Spray advantage	Main nozzle 0°-48°adjustable	Sprinkler type	360°Gear adjustable
Multi nozzle	Secondary nozzle universal adjustable	Rotating speed	Multi gear shifting+ CVT adjustable

Patent

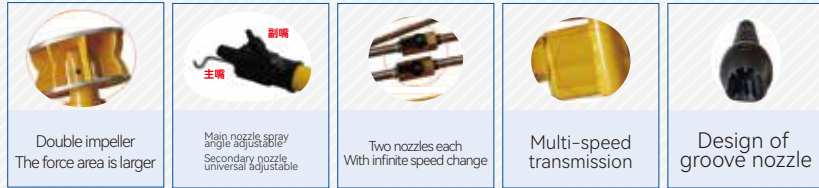

Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m
16	0.2	17.8	26
	0.3	21.8	28
	0.4	25.2	32
	0.5	28.1	35
18	0.3	27.1	32
	0.4	31.6	35
	0.5	35	38
	0.6	38.7	41
20	0.3	31.2	36
	0.4	36	40
	0.5	40.3	43
	0.6	44	46
22	0.4	42.2	41
	0.45	44.8	43
	0.5	47.3	45
	0.6	51.8	48
24	0.4	49.2	43
	0.45	52.2	45
	0.5	55	47
	0.6	60.3	50
26	0.5	62.3	47
	0.6	67.8	51
	0.7	74.9	53
	0.8	79.7	56

FSW70ADJ-S

Multi nozzle Turbine spray sprinkler
(Luxury edition)



Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.2-0.8MPa
Useage	Agriculture,forestry,garden, Industrial dust removal	Flow	20.5-144m³/h
Connector size	70Flange	Radius	27-72m
Spray advantage	Main nozzle 0°-48°adjustable,secondary nozzle universal adjustable	Sprinkler type	360°Gear adjustable
		Rotating speed	Multi gear shifting+ CVT adjustable

Patent

Adjustable speed
and slow

Main nozzle spray
angle adjustable
Secondary nozzle
universal adjustable

CVT

Design of
groove nozzle

Nozzle diameter	Pressure	Flow	Range	Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m	mm	MPa	m³/h	m
18	0.2	20.5	27	28	0.4	63.7	49.5
	0.3	25.1	34		0.5	71.3	52
	0.4	29	39		0.6	78	56
	0.5	32.5	43		0.7	84	59.5
20	0.2	24.6	29	30	0.4	72.4	50
	0.3	30	35		0.5	81	54
	0.4	34.8	41		0.6	88.7	58
	0.5	38.9	45		0.7	95.6	62.5
22	0.2	29	31	32	0.4	81.7	52
	0.3	35.4	37		0.5	91.3	56
	0.4	41	42		0.6	100	59.5
	0.5	45.9	47		0.7	107.9	63
24	0.3	41.4	38	34	0.5	102.5	57.5
	0.4	48	44		0.6	112.3	61
	0.5	53.7	49		0.7	121	64.5
	0.6	58.8	52		0.8	129.7	68
26	0.3	48	42	36	0.5	115	59.5
	0.4	55.5	47		0.6	124.5	63
	0.5	62.2	51		0.7	135	67.5
	0.6	68.1	54		0.8	144	72

FSW75ADJ-S

Multi nozzle Turbine spray sprinkler
(Exalted edition)



Specification	Parameters	Specification	Parameters
Main material	Aluminum,copper,ss,nylon	Work pressure	0.2-0.7MPa
Useage	Agriculture,forestry,garden, Industrial dust removal	Flow	9.5-149.5m³/h
Connector size	70Flange	Radius	27-73.5m
Spray advantage	Main nozzle 0°-48°adjustable	Sprinkler type	360°Gear adjustable
Multi nozzle	secondary nozzle universal adjustable	Rotating speed	Multi gear shifting+ CVT adjustable

Patent

Double impeller
The force area is larger

Main nozzle spray
angle adjustable
Secondary nozzle
universal adjustable


Two nozzles each
With infinite speed change

Multi-speed
transmission

Design of
groove nozzle

Nozzle diameter	Pressure	Flow	Range	Nozzle diameter	Pressure	Flow	Range
mm	MPa	m³/h	m	mm	MPa	m³/h	m
18	0.3	20.5	27	28	0.4	63.7	49.5
	0.4	25.1	34		0.5	71.3	52
	0.5	29	39		0.6	78	56
	0.6	32.5	43		0.7	84	59.5
20	0.3	24.6	29	30	0.4	72.4	50
	0.4	30	35		0.5	81	54
	0.5	34.8	41		0.6	88.7	58
	0.6	38.9	45		0.7	95.6	62.5
22	0.3	29	31	32	0.4	81.7	52
	0.4	35.4	37		0.5	91.3	56
	0.5	41	42		0.6	100	59.5
	0.6	45.9	47		0.7	107.9	63
24	0.3	41.4	38	34	0.5	102.5	57.5
	0.4	48	44		0.6	112.3	61
	0.5	53.7	49		0.7	121	64.5
	0.6	58.8	52		0.8	129.7	68
26	0.3	48	42	36	0.5	115	59.5
	0.4	55.5	47		0.6	124.5	63
	0.5	62.2	51		0.7	140	69.7
	0.6	68.1	54		0.8	149.5	73.5

Fixed Sprinkler Guns Pipeline Layout & Sprinkling Parameter Table

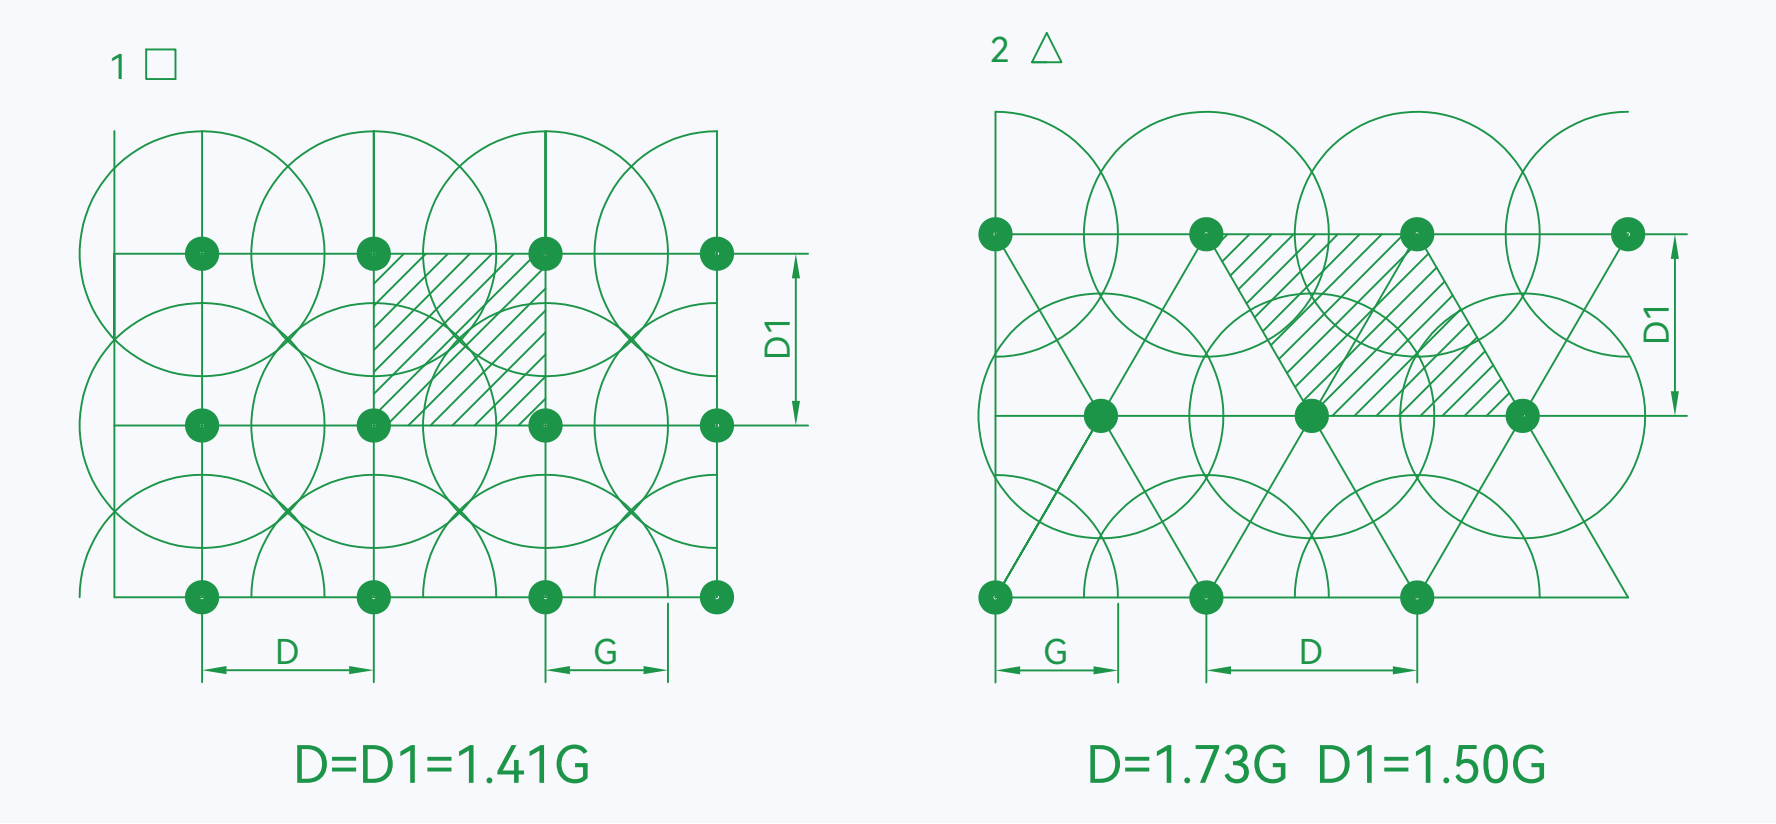

U Nozzle diameter	P Pressure	G Range	Q Flow		○ Single nozzle		□ Square layout			△ Triangular layout			
					S Spraying Area	I Spraying Intensity	D ₁ Water supply pipe spacing	S Spraying Area	I Spraying Intensity	D Spray gun spacing	D ₁ Water supply pipe spacing	S Spraying Area	I Spraying Intensity
mm	kg/cm ²	m	l/min	m ³ /h	m ²	mm/h	m	m ²	mm/h	m	m	m ²	mm/h
14	2	25	210	12.9	1962	6.5	35	1225	10.5	43	37	1591	8.1
	3	27.5	258	15.4	2374	6.4	38	1444	10.6	47	41	1927	8
	4	30.5	298	17.8	2920	6.1	43	1849	9.6	52	45	2340	7.6
	5	33.5	333	19.9	3523	5.6	47	2209	9	57	50	2650	7
16	2	26	262	15.7	2122	7.4	36	1296	12.1	44	39	1716	9.1
	3	29.5	322	19.3	2732	7	41	1681	11.4	51	44	2244	8.6
	4	33	372	22.3	3419	6.5	46	2116	10.5	57	49	2793	8
	5	36.5	416	24.9	4183	5.9	51	2601	9.5	63	54	3402	7.3
18	3	33	396	23.7	3419	6.9	46	2116	11.2	57	49	2793	8.4
	4	36	458	27.4	4069	6.7	50	2500	10.9	62	54	3348	8.1
	5	40	511	30.6	5024	6.1	56	3136	9.7	69	60	4140	7.4
	6	43	561	33.6	5805	5.8	60	3600	9.3	74	64	4736	7.1
20	3	35	478	22.6	3486	7.4	49	2401	11.9	60	52	3120	9.1
	4	38.5	553	33	4654	7.1	54	2916	11.3	66	57	3792	8.7
	5	42.5	618	37	5671	6.5	59	3481	10.6	73	63	4599	8
	6	46	678	40.6	6644	6.1	64	4096	9.9	79	69	5451	7.4
22	3	36.5	568	34	4183	8.1	51	2601	13	63	54	3402	10
	4	40.5	658	39.4	5150	7.6	57	3249	12.1	70	60	4200	9.4
	5	44.5	735	44.1	6217	7.1	62	3844	11.4	76	66	5016	8.8
	6	47.5	805	48.3	7084	6.8	66	4356	11	82	71	5822	8.3
24	3	38	669	40.1	4534	8.8	53	2809	14.2	66	57	3705	10.8
	4	42	773	46.3	5538	8.3	59	3481	13.3	72	63	4536	10.2
	5	46.5	864	51.8	6789	7.6	65	4225	12.2	80	69	5520	9.3
	6	50	947	56.8	7850	7.2	70	4900	11.5	86	75	6450	8.8
26	3	39	777	46.6	4775	9.7	54	2916	15.9	67	58	3886	12
	4	44.5	899	53.9	6217	8.6	62	3844	14	76	66	5016	10.7
	5	48	1005	60.3	7234	8.3	67	4489	13.4	83	72	5976	10.1
	6	52.5	1102	66.1	8654	7.6	74	5476	12	90	78	7020	9.4
28	4	47	1034	62	6936	8.9	66	4356	14.2	79	69	5451	11.3
	5	50.5	1155	69.3	8007	8.6	71	5041	13.7	86	75	6450	10.7
	6	54	1266	75.9	9156	7.9	76	5776	13.1	93	81	7533	10
	7	57.5	1366	81.9	10381	7.8	81	6561	12.4	99	86	8514	9.6

Note: Our company reserves the final right to interpret all sprinkler gun parameters.

Electrical powered equipment

QJ/QS Type

Submersible pump

150QJ、175QJ、200QJ、250QJ、300QJ

Submersible pump

Applicable fields: Agriculture irrigation,
drinking water for people&

livestock in mountainous areas

Useage: Deep well,canals,reservoirs



Electrical pump truck



Big power diesel pump truck



195

195 Diesel integrated pump



Triop stand

Every sprinkler has the fit triop stand



Sprinkler stand

Double wheels single

Priority adaptation flange sprinkler



Double wheels multi-sprinklers stand

2 Turbine sprinklers

+1 Small impact sprinkler

3 Sprinklers can work together at same time



FSY50

Metal circle sprinkler



Specification	Parameters	Specification	Parameters
Main material	304 SS	Flow	15-25m³/h
Useage	Agriculture irrigation,Urban green land	Range	14-23M
Connector size	2"Inner screw	Rotating angle	360°
Work pressure	0.2-0.4MPa		

Israel bermad Electromagnetic valve

First choice in industrial dust reduction



Size	Connection	Electrical type	
2"	Flange/screw optional	24VAC	Optional
2.5"		24VDC	
3"		220VAC	
4"		220VDC	

Inlet Drain valve



Material	压力	接口	Useage
Copper	Automatic drainage when pressure below 21kMpa	1/2"Out screw	To prevent freezing and cracking

Reel type sprinkler

Model	Pipe dia (mm)	Pipe length (m)	Drive type
JP50-180	50	180	Water/Eletric optional
JP65-250	65	250	
JP75-300	75	300	
JP75-400	75	400	
JP90-300	90	300	



High-pressure irrigation hose

Model	Diameter mm	Length m	Bear pressure Mpa	Broken pressure Mpa	Material	Advantage
10-50-20	50	20	1.0	3.0	Polyester filament polyurethane	High pressure & aging resistance
13-50-20	50	20	1.3	3.9		
16-50-20	50	20	1.6	4.8		
10-65-20	65	20	1.0	3.0		
13-65-20	65	20	1.3	3.9		
16-65-20	65	20	1.6	4.8		
10-80-20	80	20	1.0	3.0		
13-80-20	80	20	1.3	3.9		
16-80-20	80	20	1.6	4.8		



Plastic coated hose


Size	Length/roller m	Bear pressure Mpa	Broken pressure Mpa	Material
1"	15/20/50/100	0.2/0.3/0.6/1.0	0.6/0.9/1.8/3.0	Cotaing material PVC/PU/PE Macromolecule
1.2"	15/20/50/100			
1.5"	15/20/50/100			
2"	15/20/50/100			
2.5"	15/20/50/100			
3"	15/20/50/100			
3.5"	15/20/50/100			
4"	15/20/50/100			
4.5"	15/20/50/100			
5"	15/20/50/100			
6"	15/20/50/100			
8"	15/20/50/100			
10"	15/20/50/100			
12"	15/20/50/100			
14"	15/20/50/100			

*Any request on spec, length ,pressure be acceptable




Joints and clamps

Name	型号	Bear pressure (Mpa)
Connectors	2"	1.6
	2.5"	1.6
	3"	1.6
Clamp	2"	1.6
	2.5"	1.6
	3"	1.6

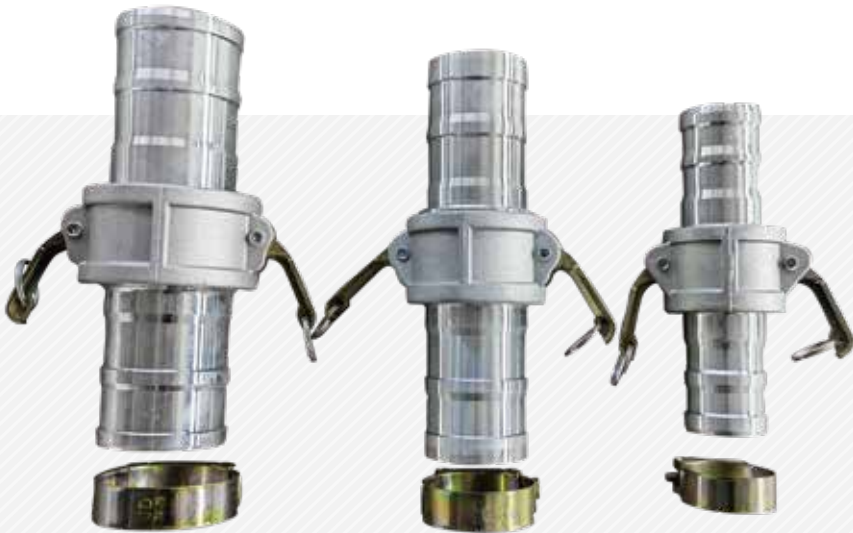

Double wings micro spray belt



Spray effect

Product features

- Front & back have the same spray range,not roll over
- Wear resistant,drag resistant and aging resistant,5-8 years work life
- Spray range 5m-12m,no blind area, twice as mush as other products
- Widely usage,can be hung up or used on the inside & outside of greenhouses
- Longer laying length,labor-saving, time-saving,esay to operate
- High-pressure resistance,twice as much as other products
- Nylon material , prevent enlarged holes



Prevent roll over
Wear resistance

Specialized accessories
Double wings' valve



Luminous strip
visible at night



*Snap connector,inner wire docking on connectors, and reducing variable diameter connectors are all available

Nano nylon hose



High strength nylon light blue water hose



High strength nylon black water hose



High strength nylon silver hose



High strength nylon red hose

Prouct features

- Made by modifying with fiber-reinforced nylon and other high-quality materials
- Internal and external double-layer composite process, resistant to aging and high pressure
- Out layer has a reflective effect and does not burn crops
- Inner layer is resistant to microbial growth and has strong antibacterial propeties without moss growth
- Sun protection and anti-aging, normal work life 5-8 years.

Any color request accepatable



Silver
Reflective
Not burn crops



Three layer co extrusion
1.Reflective layer
2.Anti aging layer
3.Corrosion resistant layer




Agriculture drip irrigation belt with perforated main water belt

Product features

- Labor-saving
- Easy install accessories

Customized distance & size of holes

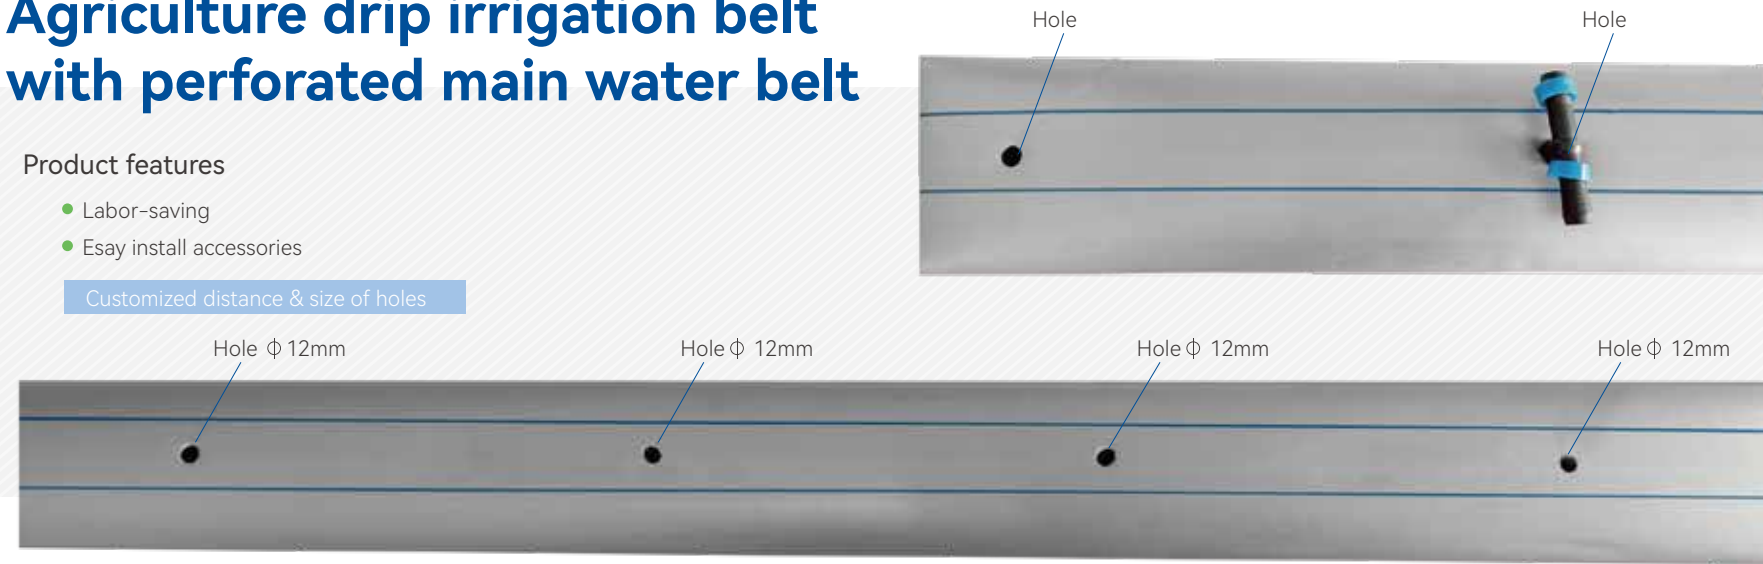


Winged hose

Product features

- Work life 3-5 years
- Can be used multiple times without damage
- Prevent mice from biting and insects from gnawing
- High strength nylon material

Can be customized according to customer requirements color and specifications

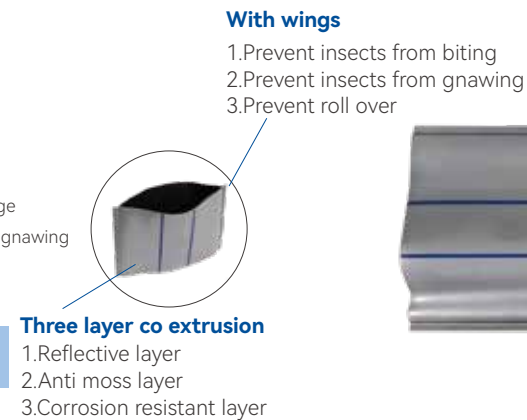

Micro-spraying hose

Product features

- Drip hole vacuum integral hot pressing molding, good adhesion, high manufacturing accuracy
- Turbulent flow with multiple outlets, strong anti clogging ability
- Uniform water output, reaching over 85%, and laying up to 80m
- Lightweight, easy to install and manage, low cost of manual installation



Reasonable design

Scientific and reasonable design of spray hole distance
Uniform water flow, not easily blocked



Enough length & thickness, improve work efficiency
High quality

Spray evenly


Smooth inner wall and smooth spraying
Spraying like a drizzle, covering a large area of crops



Micro-spray belt under film

Micro-spray belt under film was designed by our company based on the planting characteristics of watermelon and strawberry crops . The main feature is that it does not stick to the film during winding , the spraying effect is excellent.

Not stick film
Prevent burn



PRODUCTION ENVIRONMENT

生产环境



Office building



Product stock



Oriental lucky clouds stock



Pump



CNC lathe



CNC lathe



Machining center



Aluminum alloy die-casting



Machining center



Injection molding machine



Spray curing assembly line



Finished and semi-finished products



Oriental lucky clouds stock



Centrifugal pump



Pump truck in stock



Finished and semi-finished products



Centrifugal pump



USER CENTERED APPROACH
PRODUCE THE PRODUCTS SATISFIED USER

