



PRODUCT CATALOGUE



Facebook



Official website

☎ 86-574-63333031; +86-574-63326028
✉ service@cnhuaguang.com; kate@cnhuaguang.com
🌐 www.cnhuaguang.com
🏢 Zhejiang Huaguang Electric Appliance Group Co.,Ltd.
📍 Zhoushang Industrial Development Zone, Cixi City,Ningbo,China

COLLECTION 2025

About HG

TO BE THE LEADER OF STEAM-RELATED TECHNOLOGY IN THE WORLD

Time is firewood, steam is the seasoning. Huaguang has been dedicated to exploring the infinite possibilities of steam life for 40 years. Making better steam household appliances and providing consumers with higher quality of life has always been the pursuit of Huaguang. Since its establishment, it has been committed to the research of steam technology from beginning to end, with independent innovation laboratories and leading industry technology levels in intelligent control technology, core module research, ergonomics research, and other areas. At present, Huaguang Electric Appliances Group has applied for and obtained over 500 national and international patents related to appearance, utility models, and invention scope, mastering the core technology of steam appliances. Established the foundation for Huaguang Electric Appliances in China's steam small home appliance industry



Company History

1985

Foundation of Zhejiang Cixi Household Electric Appliance Co.,Ltd

1998

Acquired HG brand and change company name to Ningbo Huaquang Electric Appliance Co.,Ltd.

2003

Started projects of oversea-oriented steam station

2006

Annual sales volume reached million pcs for steam station, covering 60% of Italian market share

2007

Made a transition—opened up domestic market and developed derivative products: garment steamer

2009

Awarded China famous brand

2010

Ranked 2nd in China market

2012

Developed e-commerce in all channels

2015

Participated in IFA Berlin Show; New designs came

2017

Development in an all-around products

2020-2024

Rated as one of the top ten electric iron export enterprises in China
Awarded CF design

Company History



100^{+PCS}

Country of sale

500^{+item}

Patent

100^{+bit}

R&d personnel

38600^{m²}

Factory floor space

China's top ten electric iron import and export enterprises.

Huaguang Appliances focus on steam technology, continue to introduce better steam home appliances, to be the leader of the steam home appliances industry.

● NORTH AMERICA

USA. Canada.

● Europe

France. Italy.
Sweden. Germany.
Holland.

● Oceania

Australia.

● Asia

China. Japan.
Korea. Singapore.

Certifications



Huaguang Electric has more than 100 senior R&D engineers and advanced independent innovation laboratories, leading the industry's technical level in intelligent control technology, steam technology research, ergonomics research, etc. A total of more than 500 patents have been applied for and obtained, including 3 international patents, 16 invention patents and 262 utility model patents. The products have won the International IF Design Gold Award, CF Design Gold Award, Ningbo Appearance Design Gold Award, etc.




Research and development



Laboratory

Our Strength

We have a number of independent steam technology, intelligent control technology and other production research development laboratories, as well as international certification Intertek laboratory

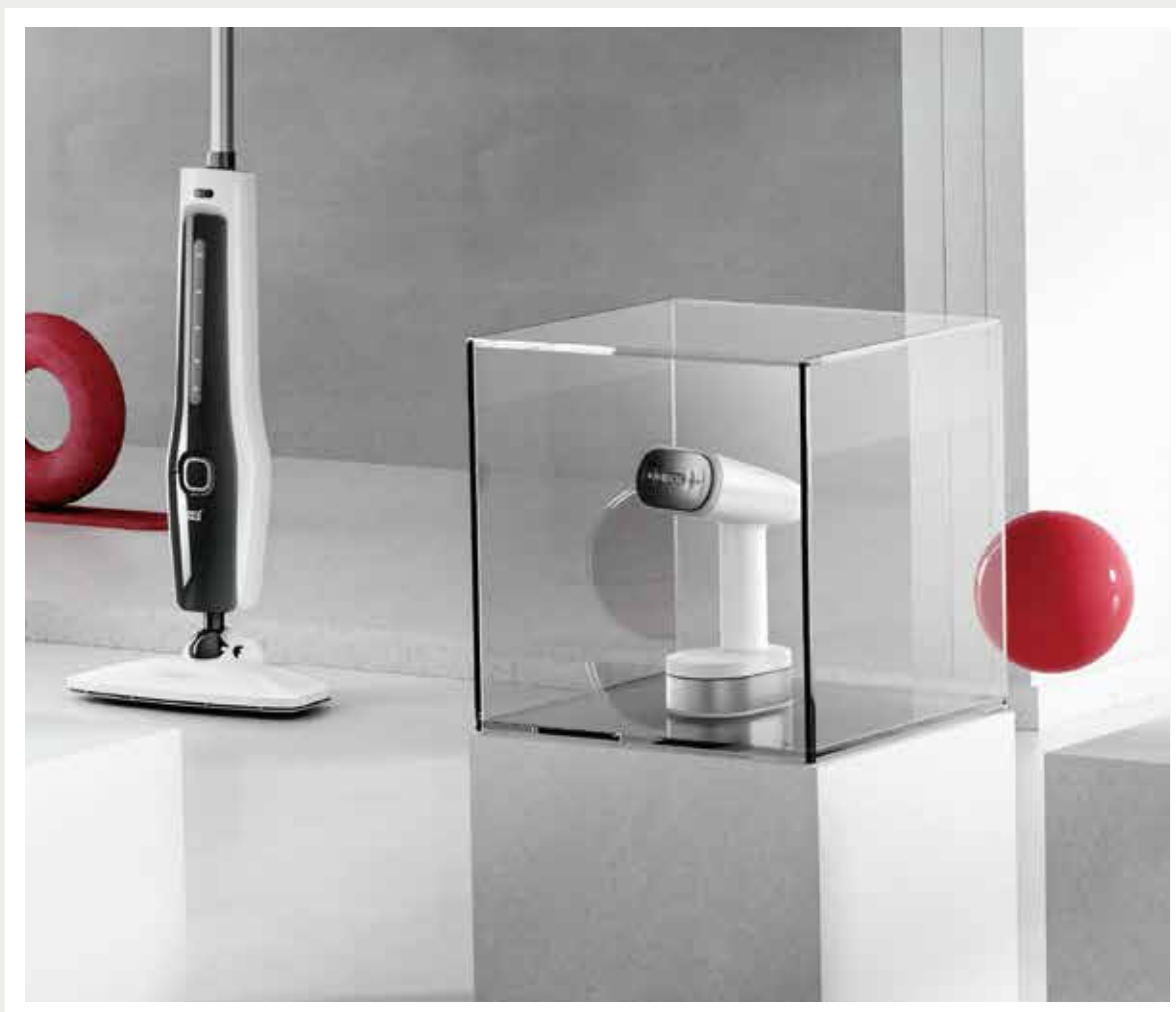


CONTENTS



Steam Garment Care

Handheld Garment Steamer	11
Steam Iron	31
Table Iron	37
Garment Steamer.....	41
Clothing Care	53




Steam Personal Care

Foot Spa Tub	73
--------------------	----



Steam Cleaning

Cleaning Machine	63
Mop	67



Steam Kitchen

Capsule Coffee Machine	77
Espresso Coffee Machine	89
American Coffee Machine	97
Coffee Machine Periphery	99

Steam Garment Care



Art of steam



Model:T31 Series

new



Dry and wet ironing



Flat hung two ironing



Portable and compact



Heat proof mat



Fabric Brush

Power	220-240V 50/60Hz 1300W
Steam Rate	15±5 g/min
Heating Time	30s
Steam Pressure	1.0bar
Working Time	7-11min
Steam Temperature	140-180°C
Water Tank Capacity	105ml
Steam Level	1
Product Dimension	255*65*89mm
20'GP/40'GP/40HQ	5840/12224/14456PCS

Optional function:
with or without self-cleaning function
The color of the picture is spray paint, and injection molding process is optional



Rotational panel at 90° /Rotational Rotatable panel for a variety of scenarios



Seven hole jet
Wrinkle removal is faster



Comes with intelligent cleaning system
Hold down the 5s button to enable the self-cleaning mode



Removable water tank
Say goodbye to the trouble of adding water

Model:T22



-  Dry and wet ironing
-  Flat hung two ironing
-  Portable and foldable



Fur Brush

Power	220-240V 50/60Hz 1400W
Steam Rate	18±4 g/min
Heating Time	20-30s
Steam Pressure	1.0bar
Working Time	8-13min
Steam Temperature	160-190°C
Water Tank Capacity	185ml
Steam Level	1
Product Dimension	133.5*101.5*231mm
20'GP/40'GP/40HQ	3789/7578/9543PCS



Foldable head takes up less space



185mL capacity water tank
Pull out the silicone and fill the water tank



Stainless steel panel
7 holes for steam and different radiations



Power indicator light
Working status at a glance

Model:T21 Series



-  Dry and wet ironing
-  Flat hung two ironing
-  Portable and foldable



Power	220-240V 50/60Hz 1200W
Steam Rate	17±4 g/min
Heating Time	25±5s
Steam Pressure	1.0bar
Working Time	4-7min
Steam Temperature	110-160°C
Water Tank Capacity	100 ml
Steam Level	1
Product Dimension	178*82*252mm
20'GP/40'GP/40HQ 6545/13090/16484PCS	
Optional panel materials: Stainless steel panel/Aluminum panel	



Chestnut panel, 5110mm² ironing area, double runner
With "beauty tip" design, easy to iron clothes dead corners



100ml removable, visual water tank
Surplus water at a glance



Fuselage tilt Angle 4°
Steam reflux is not hot



Handle folding design, portable storage; Compact and portable after folding, optimize storage space



Fabric Brush

Static Brush

T02

Power	220-230V 50/60Hz 800W
Steam Rate	15±3 g/min
Heating Time	45±5s
Steam Pressure	1.0bar
Working Time	6-9min
Steam Temperature	150-170°C
Water Tank Capacity	110ml
Steam Level	1
Product Dimension	180*99*208mm
20'GP/40'GP/40HQ	4695/9391/11826PCS



Static Brush

T06

Power	220-230V 50/60Hz 1000W
Steam Rate	16±3 g/min
Heating Time	45±5s
Steam Pressure	1.0bar
Working Time	6-9min
Steam Temperature	110-150°C
Water Tank Capacity	120ml
Steam Level	1
Product Dimension	135*95*245mm
20'GP/40'GP/40HQ	5208/10046/12650PCS

T03

Power	220-230V 50/60Hz 1000W
Steam Rate	17±3 g/min
Heating Time	45±5s
Steam Pressure	1.0bar
Working Time	7-11min
Steam Temperature	150-170°C
Water Tank Capacity	150ml
Steam Level	1
Product Dimension	170*99*228mm
20'GP/40'GP/40HQ	5170/10340/13021PCS



Fur Brush



Fur Brush

T07

Power	220-230V 50/60Hz 1000W
Steam Rate	17±3 g/min
Heating Time	45±5s
Steam Pressure	1.0bar
Working Time	15-22min
Steam Temperature	160-190°C
Water Tank Capacity	300ml
Steam Level	1
Product Dimension	170*99*225mm
20'GP/40'GP/40HQ	3375/6750/8500PCS

T05

Power	220-230V 50/60Hz 1500W
Steam Rate	15±3 g/min
Heating Time	30±5s
Steam Pressure	1.0bar
Working Time	6-8min(Large range)
Steam Temperature	120-150°C
Water Tank Capacity	90ml
Steam Level	3
Product Dimension	325*150*100mm
20'GP/40'GP/40HQ	3756/7848/9288PCS



Fur Brush

Fabric Brush

Assemble Line Clip



Measuring Cup

T11

Power	220-230V 50/60Hz 1000W
Steam Rate	14±3 g/min
Heating Time	40±5s
Steam Pressure	1.0bar
Working Time	5-9min
Steam Temperature	140-180°C
Water Tank Capacity	90±5ml
Steam Level	1
Product Dimension	180*99*208mm
20'GP/40'GP/40HQ	4736/9437/11724PCS



Static Brush

T12

Power	220-240V 50Hz 800W
Steam Rate	14±3 g/min
Heating Time	35±5s
Steam Pressure	1.0bar
Working Time	10-16min
Steam Temperature	110-140°C
Water Tank Capacity	180ml
Steam Level	1
Product Dimension	113*94*205mm
20'GP/40'GP/40HQ	3428/6857/8634PCS



Fur Brush

QH02D

Power	220-240V 50/60Hz 600W
Steam Rate	15±3 g/min
Heating Time	35±5s
Steam Pressure	1.0bar
Working Time	7-8min
Steam Temperature	95±3°C
Water Tank Capacity	100ml
Steam Level	1
Product Dimension	180*90*200mm
20'GP/40'GP/40HQ	4480/8650/10890PCS

QH01B

Power	220-240V 50/60Hz 600W
Steam Rate	15±3 g/min
Heating Time	35±5s
Steam Pressure	1.0bar
Working Time	7-8min
Steam Temperature	95±3°C
Water Tank Capacity	100ml
Steam Level	1
Product Dimension	180*90*200mm
20'GP/40'GP/40HQ	5570/11500/14040PCS



Fur Brush



Fur Brush

QH05B

Power	220-240V 50/60Hz 800W
Steam Rate	18±3 g/min
Heating Time	60±5s
Steam Pressure	1.0bar
Working Time	4-8min
Steam Temperature	97±3°C
Water Tank Capacity	100ml
Steam Level	1
Product Dimension	223*90*143mm
20'GP/40'GP/40HQ	4324/8648/10890PCS

QH01C

Power	220-240V 50/60Hz 600W
Steam Rate	15±3 g/min
Heating Time	35±5s
Steam Pressure	1.0bar
Working Time	7-8min
Steam Temperature	95±3°C
Water Tank Capacity	100ml
Steam Level	1
Product Dimension	180*90*200mm
20'GP/40'GP/40HQ	4420/8520/10730PCS



Fur Brush



Measuring Cup



Fur Brush

S01

Power	220V 50Hz 600W
Steam Rate	15±3 g/min
Heating Time	25±5s
Steam Pressure	1.0bar
Working Time	5-6min
Steam Temperature	98±3°C
Water Tank Capacity	80ml
Steam Level	1
Product Dimension	126*105*238mm
20'GP/40'GP/40HQ	3970/7941/10000PCS

Model:E23 Series

new



Dry and wet ironing



Flat hung two ironing



Portable and compact



Fur Brush

Power	220~240V 50/60Hz 1800W
Steam Rate	28±4 g/min
Heating Time	30±5s
Steam Pressure	1.0bar
Working Time	9-13min
Steam Temperature	140-180°C
Water Tank Capacity	300ml
Steam Level	2
Product Dimension	165.5*117*259mm
20'GP/40'GP/40HQ	/
Optional panel materials: Stainless steel panel/Aluminum panel	



Cast aluminum panel / care for clothes
7 steam outlet positions / efficient ironing



1800W high power, micro pressure steam
one ironing double effect



Two-Stage Steam Adjustment, easy to operate
Can be switched between flat ironing and hanging ironing



Removable water tank
Say goodbye to the trouble of adding water

Model:E17



 Portable and foldable



Power	220-240V 50/60Hz 1800W
Steam Rate	28±4 g/min
Heating Time	25±5s
Steam Pressure	1.0bar
Working Time	8-11min
Steam Temperature	140-180°C
Water Tank Capacity	260ml
Steam Level	2
Product Dimension	200*113*260mm
20'GP/40'GP/40HQ	2842/5684/7157PCS



Foldable head takes up less space



Press the tank button to pull out the tank



Cast aluminum ceramic panel
7 holes out steam & different arcs



Intelligent control panel
Dry Ironing Mode (1st Level) + Dual-Steam Modes

Model:E16



- 

Dry and wet ironing
- 

Flat hung two ironing
- 

Portable and compact



Power	220-240V 50/60Hz 1800W
Steam Rate	28±3 g/min
Heating Time	25±5s
Steam Pressure	1.0bar
Working Time	9-12min
Steam Temperature	140-180°C
Water Tank Capacity	300ml
Steam Level	2
Product Dimension	184*118.5*261mm
20'GP/40'GP/40HQ	2541/5082/6400PCS



Cast aluminum ceramic panel, constant temperature does not hurt clothes



Press the tank button to pull out the tank



Intelligent control Dry Ironing Mode (1st Level) | Dual-Steam Modes,Independent steam key



Two ways of getting steam out Short press: release the hand to stop, lock: continuous steam



Fabric Brush

Fur Brush

E10

Power	220-240V 50/60Hz 1600W
Steam Rate	26±3 g/min
Heating Time	30±5s
Steam Pressure	1.5bar
Working Time	7-13min
Steam Temperature	120-170°C
Water Tank Capacity	250ml
Steam Level	1
Product Dimension	145*106*250mm
20'GP/40'GP/40HQ	3085/6171/7771PCS



Fur Brush

E15E

Power	220-240V 50/60Hz 1800W
Steam Rate	30±5 g/min
Heating Time	30±5s
Steam Pressure	1.0bar
Working Time	7-11min
Steam Temperature	110-145°C
Water Tank Capacity	260ml
Steam Level	1
Product Dimension	146*101*232mm
20'GP/40'GP/40HQ	3857/7714/9714PCS



Fabric Brush

Fur Brush

E10pro

Power	220-240V 50/60Hz 1600W
Steam Rate	26±3 g/min
Heating Time	30±5s
Steam Pressure	1.5bar
Working Time	8-11min
Steam Temperature	120-170°C
Water Tank Capacity	250ml
Steam Level	2
Product Dimension	145*106*250mm
20'GP/40'GP/40HQ	3085/6171/7771PCS



Static Brush

Fur Brush

E15

Power	220-240V 50/60Hz 1800W
Steam Rate	30±5 g/min
Heating Time	30±5s
Steam Pressure	1.0bar
Working Time	7-11min
Steam Temperature	110-145°C
Water Tank Capacity	260ml
Steam Level	1
Product Dimension	146*101*232mm
20'GP/40'GP/40HQ	4595/9191/11574PCS



Fur Brush

QH03

Power	220-240V 50/60Hz 1000W
Steam Rate	18±3 g/min
Heating Time	40s
Steam Pressure	1.5 bar
Working Time	7-8min
Steam Temperature	97±3°C
Water Tank Capacity	260ml
Steam Level	1
Product Dimension	125*120*255mm
20'GP/40'GP/40HQ	3529/7058/8888PCS

QH03E

Power	220-240V 50/60Hz 1200W
Steam Rate	18±3 g/min
Heating Time	40s
Steam Pressure	1.5 bar
Working Time	7-8min
Steam Temperature	97±3°C
Water Tank Capacity	260ml
Steam Level	1
Product Dimension	125*120*255mm
20'GP/40'GP/40HQ	3540/7080/8519PCS



Static Brush

Fur Brush



Fabric Brush

Fur Brush

QH08AK

Power	220-240V 50/60Hz 1500W
Steam Rate	27±3 g/min
Heating Time	25s
Steam Pressure	1.0bar
Working Time	10-15min
Steam Temperature	97±3°C
Water Tank Capacity	300ml
Steam Level	1
Product Dimension	176*133*325mm
20'GP/40'GP/40HQ	2541/5082/6400PCS



Static Brush

QH09E

Power	220-230V 50/60Hz 1500W
Steam Rate	23±3 g/min
Heating Time	30±5s
Steam Pressure	1.5bar
Working Time	10-15min
Steam Temperature	140-160°C
Water Tank Capacity	300ml
Steam Level	1
Product Dimension	200*117*247mm
20'GP/40'GP/40HQ	2752/5760/6808PCS



Fabric Brush

Fur Brush

QH08BK

Power	220-240V 50/60Hz 1500W
Steam Rate	27±3 g/min
Heating Time	25s
Steam Pressure	1.0bar
Working Time	10-15min
Steam Temperature	97±3°C
Water Tank Capacity	300ml
Steam Level	1
Product Dimension	119.5*117.1*280.2mm
20'GP/40'GP/40HQ	3223/6447/7884PCS



Static Brush



Fabric Brush



Fur Brush

QH09

Power	220-230V 50/60Hz 1500W
Steam Rate	23±3 g/min
Heating Time	30±5s
Steam Pressure	1.5bar
Working Time	10-15min
Steam Temperature	140-160°C
Water Tank Capacity	300ml
Steam Level	2
Product Dimension	200*117*247mm
20'GP/40'GP/40HQ	2666/5333/6716PCS

**S06**

Power	220V 50Hz 800W
Steam Rate	18±3 g/min
Heating Time	60±5s
Steam Pressure	1.0bar
Working Time	9-13min
Steam Temperature	97±3°C
Water Tank Capacity	170ml
Steam Level	1
Product Dimension	125*120*255 mm
20'GP/40'GP/40HQ	8437/16874/21250PCS

Model:MR01 Series



- Dry and wet ironing
- Flat hung two ironing
- Large panel
- self cleaning



Heat proof mat

Power	220-240V 50Hz 1200W
Steam Rate	14±3 g/min
Heating Time	45±5s
Steam Pressure	1.0bar
Working Time	5-9min
Steam Temperature	140-180°C
Water Tank Capacity	100ml
Steam Level	4
Product Dimension	185*75*117mm
20'GP/40'GP/40HQ	5890/11781/14836PCS

Optional function:
Intelligent screen display+four levels of steam+self cleaning/mechanical buttons+two levels of steam




Cast aluminum ceramic panel,constant temperature does not hurt clothes



Press the tank button to pull out the tank



Intelligent control, simple operation
Dry and wet ironing, with self-cleaning function

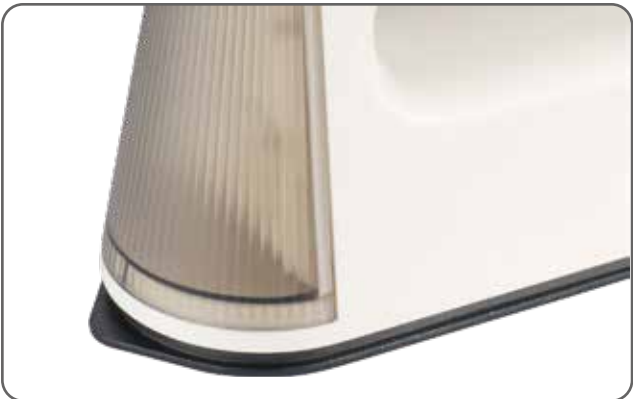

"Beauty Tip" design, Iron collars, cuffs buttons and other difficult parts with precision

Model:MR03

new



- Dry and wet ironing
- Flat hung two ironing
- Large panel
- self cleaning



Power	220-240V 50/60Hz 1400W
Steam Rate	20±4 g/min
Heating Time	35±5s
Steam Pressure	1.0bar
Working Time	6-10min
Steam Temperature	140-180°C
Water Tank Capacity	130ml
Steam Level	1
Product Dimension	199*81*125mm
20'GP/40'GP/40HQ	4112/7930/9986PCS



180° Rotatable Handle
Flat hanging dual-use



Multi-fabric dry/wet dual use, Dry Ironing - Professional styling, Wet Ironing - Quick wrinkle removal



Max 24g/min, Powerful steam volume
Remove wrinkles and set clothes in one go



175mm Large Full-Surface Panel
Cast aluminum panel



Measuring Cup



Heat proof mat

SR01A

Power	220-240V 50/60Hz 1000W
Steam Rate	0.5±0.2 g/once
Heating Time	30±5s
Steam Pressure	1.0bar
Working Time	85-200/once
Steam Temperature	110-160°C
Water Tank Capacity	60ml
Steam Level	1
Product Dimension	237*81*89mm
20'GP/40'GP/40HQ	9380/18090/22780PCS



Measuring Cup



Heat proof mat

SR01B

Power	220-240V 50/60Hz 1000W
Steam Rate	0.5±0.2 g/once
Heating Time	30±5s
Steam Pressure	1.0bar
Working Time	85-200/once
Steam Temperature	110-160°C
Water Tank Capacity	60ml
Steam Level	1
Product Dimension	237*81*89mm
20'GP/40'GP/40HQ	9380/18090/22780PCS



Measuring Cup



Heat proof mat

SR02

Power	220-240V 50/60Hz 800W
Steam Rate	0.3±0.1 g/once
Heating Time	30±5s
Steam Pressure	1.0bar
Working Time	125-250/once
Steam Temperature	90-130°C
Water Tank Capacity	50ml
Steam Level	1
Product Dimension	132.5*131.5*90.5mm
20'GP/40'GP/40HQ	11416/23646/27724PCS



Brush



Storage bag



Watering can



USB cable

D1

Power	Ironing Board 130W (Hairball 2W)
Steam Rate	/
Heating Time	/
Steam Pressure	/
Working Time	ironing30-45min/shaving 5H
Steam Temperature	/
Water Tank Capacity	/
Steam Level	/
Product Dimension	62*68*175mm
20'GP/40'GP/40HQ	8571/17142/24587PCS

Model:SE01A



- Secondary heating
- self cleaning
- Power cord storage



Power	220V 50Hz 2180W/230V 50Hz 2280W
Steam Rate	40±5 g/min
Heating Time	60±5s
Steam Pressure	2.5bar
Working Time	13-17min(Large range)
Steam Temperature	140-160°C
Water Tank Capacity	600ml
Steam Level	5
Product Dimension	276*276*170mm
20'GP/40'GP/40HQ	1022/2120/2484PCS



Five speed steam control
For different kinds of fabrics



600ml detachable tank with detachable filter element



Dual heating system, 160°C high temperature panel
secondary heating without wetting clothes



Large space clamshell storage box
All power lines and hoses are collected

Model:HG528 Series



 Secondary heating

 Power cord storage



Power	220-240V 50/60Hz 2200W
Steam Rate	38±5 g/min
Heating Time	60±5s
Steam Pressure	1.5bar
Working Time	17-22min
Steam Temperature	150-180°C
Water Tank Capacity	750ml
Steam Level	3
Product Dimension	355*231*230mm
20'GP/40'GP/40HQ	940/1940/2280PCS
Optional function: Secondary heating of double heating element	



Without steam, Only need high temperature panel to achieve dry ironing effect



750ml water tank capacity
Detachable tank design



You can put it in the closet when you are done



3 gear ironing mode
Easily handle all kinds of fabrics

Model:GE01 Pro

new



- Secondary heating
- Three gear adjustment
- Three-speed ironing Angle adjustment



Power	220-240V 50/60Hz 2280W
Steam Rate	40±5 g/min(Large range)
Heating Time	60±5s
Steam Pressure	2.5bar
Working Time	37-48min(Large range)
Steam Temperature	140-160°C
Water Tank Capacity	1700ml
Steam Level	3
Product Dimension	447.3*326.6*1640mm
20'GP/40'GP/40HQ	243/469/590PCS



Cast aluminum ceramic coating ironing panel
Micro dry cleaning,handle button 3 gears



Upgrade and enlarge the ironing board
Flat, inclined and vertical integrated large ironing panel



1.7L large water tank, 40 minutes + ironing time
See through the tank window, clearly visible



Small roller design is added to the bottom of the main engine
No need to carry the machine, the site can be switched at will

Model:GE01



- Secondary heating
- Three gear adjustment
- Three-speed ironing Angle adjustment



Power	220-240V 50/60Hz 2280W
Steam Rate	40±5 g/min(Large range)
Heating Time	60±5s
Steam Pressure	2.5bar
Working Time	37-48min(Large range)
Steam Temperature	140-160°C
Water Tank Capacity	1700ml
Steam Level	3
Product Dimension	447.3*326.6*1550mm
20'GP/40'GP/40HQ	312/646/758PCS



Cast aluminum ceramic coating ironing panel
Micro dry cleaning,handle button 3 gears



Three modes of free ironing
Flat, inclined and vertical integrated large ironing panel



1.7L large water tank, 40 minutes + ironing time
See through the tank window, clearly visible



Small roller design is added to the bottom of the main engine
No need to carry the machine, the site can be switched at will

Model:GS01B



2.5 bar 2.5bar pressurized steam Three-speed ironing Angle adjustment



Power	220-240V 50/60Hz 2000W
Steam Rate	42±5 g/min(Large range)
Heating Time	35±5s
Steam Pressure	1bar
Working Time	36-46min
Steam Temperature	97±3℃
Water Tank Capacity	1700ml
Steam Level	3
Product Dimension	512.5*326.6*1550mm
20'GP/40'GP/40HQ	312/646/758PCS
Optional function: Oversized ironing board	



Large power of 2000W
3 steam levels allows ironing different kinds of clothing



Ironing board adjustable in 3 angles :
Vertical, 45°and Horizontal



Stainless steel coating soleplate with triangle design
Strong steam with practical performance



1.7L large water tank capacity
Continuous using for over 40mins

Model:GS01C



2.5 bar 2.5bar pressurized steam Three-speed ironing Angle adjustment



Power	220-240V 50/60Hz 2000W
Steam Rate	42±5 g/min(Large range)
Heating Time	35±5s
Steam Pressure	1bar
Working Time	36-46mim
Steam Temperature	97±3℃
Water Tank Capacity	1700ml
Steam Level	5
Product Dimension	512.5*326.6*1550mm
20'GP/40'GP/40HQ	312/646/758PCS
Optional function: Oversized ironing board	



Large power of 2000W
5 steam levels allows ironing different kinds of clothing



Ironing board adjustable in 3 angles :
Vertical, 45°and Horizontal



Stainless steel coating soleplate with triangle design
Strong steam with practical performance



1.7L large water tank capacity
Continuous using for over 40mins

Model:QZ66-XDV Series




 Secondary heating

 Liquid crystal display screen



Power	220-240V 50/60Hz 2180W
Steam Rate	35±5 g/min
Heating Time	50±5s
Steam Pressure	2.5bar
Working Time	37-50min
Steam Temperature	140-160°C
Water Tank Capacity	1500ml
Steam Level	5
Product Dimension	330*340*1700mm
20'GP/40'GP/40HQ 296/612/718PCS 329/658/829PCS	
Optional function: Quick take-up with foot/Two or three ironing angles	

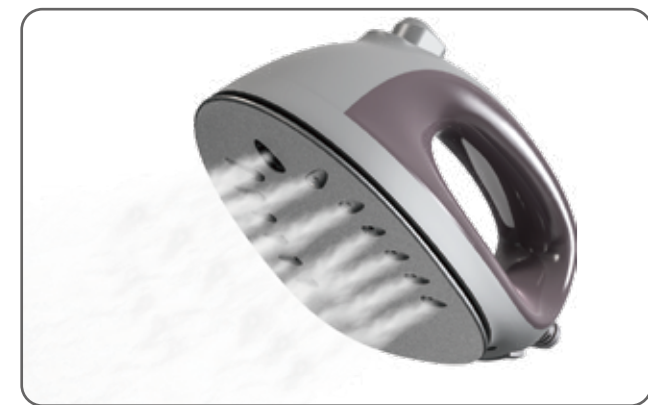

2180W supercharged high-power system
fast steam output



Dry ironing to set, wet ironing to remove wrinkles
Wrinkle removal for different needs



LCD five-speed adjustment, suitable for a variety of fabrics
Select the gear accurately for different fabrics



1500ml visual water tank
Real-time view of water volume to avoid dry burning risk

Model:QY66 Series



-  Multi-gear adjustment
-  Multi-scenario application
-  Three-speed ironing Angle adjustment



Power	220-240V 50/60Hz 1580W
Steam Rate	35±5 g/min
Heating Time	60±5s
Steam Pressure	1.0bar
Working Time	37-50min
Steam Temperature	97±3℃
Water Tank Capacity	1500ml
Steam Level	10
Product Dimension	330*340*1700mm
20'GP/40'GP/40HQ 296/612/718PCS 340/704/825PCS	
Optional function: Two ironing angles/Three ironing angles	



Flat/hanging/slanted pressing in one
Meet a variety of ironing positions



Stainless steel ironing panel, ironing silky smooth
Uniform heat conduction without damaging the fabric



10 speed adjustment, accurate control of steam content
Select the gear accurately for different fabrics



1500ml visual water tank
Real-time view of water volume to avoid dry burning risk



Fur Brush

QY65-HDV

Power	220-240V 50/60Hz 1580W
Steam Rate	35±5 g/min
Heating Time	60±5s
Steam Pressure	1.0bar
Working Time	35-46min
Steam Temperature	97±3°C
Water Tank Capacity	1400ml
Steam Level	10
Product Dimension	350*350*1650mm
20'GP/40'GP/40HQ	369/739/931PCS



Fur Brush

QY69-HDV

Power	220-240V 50/60Hz 1580W
Steam Rate	35±5 g/min
Heating Time	60±5s
Steam Pressure	1.0 bar
Working Time	32-43min
Steam Temperature	97±3°C
Water Tank Capacity	1300ml
Steam Level	3
Product Dimension	300*300*1730mm
20'GP/40'GP/40HQ	548/1134/1328PCS

Optional function:
LCD pointy hot brush/Knob Type D hot brush



Fur Brush

QY56-HDV

Power	220-240V 50/60Hz 1580W
Steam Rate	35±5 g/min
Heating Time	60±5s
Steam Pressure	1.0bar
Working Time	33-45min
Steam Temperature	97±3°C
Water Tank Capacity	1350ml
Steam Level	9
Product Dimension	339*315*1635mm
20'GP/40'GP/40HQ	331/686/804PCS



Fur Brush

QY20-D

Power	220-240V 50/60Hz 1800W
Steam Rate	35±5 g/min
Heating Time	60±5s
Steam Pressure	1.0bar
Working Time	67-90min
Steam Temperature	97±3°C
Water Tank Capacity	2700ml
Steam Level	4
Product Dimension	350*255*1700mm
20'GP/40'GP/40HQ	576/1194/1400PCS



Fur Brush

QY50-H

Power	220-240V 50/60Hz 1580W
Steam Rate	35±5 g/min
Heating Time	60±5s
Steam Pressure	1.0bar
Working Time	33-45min
Steam Temperature	97±3°C
Water Tank Capacity	1350ml
Steam Level	4/Infinite
Product Dimension	339*315*1635mm
20'GP/40'GP/40HQ	332/687/806PCS



Fur Brush

QY60-DS

Power	220-240V 50/60Hz 1580W
Steam Rate	35±5 g/min
Heating Time	60±5s
Steam Pressure	1.0bar
Working Time	37-50min
Steam Temperature	97±3°C
Water Tank Capacity	1500ml
Steam Level	1
Product Dimension	340*235*1635mm
20'GP/40'GP/40HQ	634/1316/1542PCS

Model:V05

new

- 

6-Blade
Cutter Head
- 

Suction and
shaving



Power	5W
Cutter Bits:	6-Blade Cutter Head
Rotate Speed:	7500 rpm/min
Working Time:	60min
Product Dimension	210*73*80mm
20'GP/40'GP/40HQ	13160/27240/31960PCS
Optional version: Dry battery /usb charger	



68mm steel mesh cover



Integrated suction and shaving



Electrostatic brush
Removable wool storage bin



Dry cell and Rechargeable edition
Buy according to demand

Model:V02



- usb charging
- Suction and shaving



- Cleaning Brush
- Charging Cable

Power	2W
Cutter Bits:	3-Blade Cutter Head
Rotate Speed:	7000 rpm/min
Working Time:	40min
Product Dimension	130*67*77mm
20'GP/40'GP/40HQ	16000/33500/38840PCS



Rechargeable Ni-MH battery with 1200mA
Detachable stainless steel blade



Suitable for all kinds of fabric such as cotton
wool, linen etc



Small size 130*67*77mm
Convenient travel



Power indicator light
On/off switch

Model:V03



usb
charging

Suction and
shaving



Power	2W
Cutter Bits:	3-Blade Cutter Head
Rotate Speed:	7000 rpm/min
Working Time:	40min
Product Dimension	128*66*57mm
20'GP/40'GP/40HQ	17700/35572/41996PCS



Convenient for travel with small size 128*66*57mm
Power indicator light and ON/OFF switch



3 stainless steel blades,
7000r/min strong power



Removable back cover
with hidden electrostatic brush



USB rechargeable, Long standby
time of more than 2 weeks

Steam Cleaning



Art of steam



Model:C5



5
kind

5 kinds of
cleaning sprinkler



Power	220-240V 50/60Hz 1000W
Steam Rate	25±3 g/min
Heating Time	5±1min
Steam Pressure	2-3bar
Working Time	11-15min
Steam Temperature	100-120°C
Water Tank Capacity	300ml
Product Dimension	168*132*285mm
20'GP/40'GP/40HQ	2038/3953/4688PCS



Pneumatic helmet, can not be unscrewed when the chassis is working at high pressure



The kitchen area is fully covered to accurately break different stains



300ml water tank capacity
Work can last 11-15 minutes



1 meter long hose with 3 meter long wire can cover the whole area of small and medium-sized kitchen

Model:Q930



 One machine with multiple functions

 decontamination sterilize



Power	220-240V 50/60Hz 1300W
Steam Rate	45±5 g/min
Heating Time	4-6min
Steam Pressure	3.5bar
Working Time	15-18min
Steam Temperature	98±3℃
Water Tank Capacity	800ml
Product Dimension	345*273*230mm
20'GP/40'GP/40HQ	674/1396/1638PCS



100℃ high temperature
Descaling and sterilization are effortless



decontamination
One machine with multiple functions



The bottom is equipped with a universal wheel



3.5bar strong steam

Model:M3pro



5
kind

5 kinds of
cleaning sprinkler



Power	220-240V 50/60Hz 1500W
Steam Rate	25±5 g/min
Heating Time	45±5s
Steam Pressure	1.5bar
Working Time	10-18min
Steam Temperature	80-110°C
Water Tank Capacity	350ml
Steam Level	1
Product Dimension	1200*220*325mm
20'GP/40'GP/40HQ	995/2062/2418PCS



2 in 1:
Steam Mop+Steam Cleaner



One click to switch the direction of steam injection
Better floor care



Large detachable water tank Water level at a glance,to
meet the whole house clean use



Safety clips. Cleaning accessories can be easily
replaced with a single press.

Model:MAA3-D



 Three speed steam control

 90° free control



Power	220-240V 50/60Hz 1300W
Steam Rate	28±4 g/min
Heating Time	45±5s
Steam Pressure	1.5bar
Working Time	14-19min
Steam Temperature	90-110°C
Water Tank Capacity	450ml
Steam Level	/
Product Dimension	270*215*1140mm
20'GP/40'GP/40HQ	1202/2490/2920PCS



3 gears are adjustable
Suitable for a variety of ground



90° free adjustment
There is no bending over to mop the floor



Removable design



Fine fiber cleaning cloth
Care for the floor at the same time more durable

Steam Personal Care



Art of steam



Model:Z1



Power	220-240V 50/60Hz 400W
Steam Rate	/
Heating Time	50±5s
Steam Pressure	/
Working Time	26min(Third gear)
Steam Temperature	35-50℃
Water Tank Capacity	240ml
Steam Level	3
Product Dimension	385*385*278mm
20'GP/40'GP/40HQ	396/820/962PCS



Digital touch panel for easy operation.Power indicator light.Fast heating up in 50 seconds.



With independent herbal essential oil, add essential oil when using, deep fumigation conditioning



Detachable water tank.Powerful&continuous steam output.26mins working time per the highest temperature.



2 sets of double-row balls, 112 bionic pressing columns, covering the soles of the feet

Steam Kitchen



Art of steam



new

Model:CM-C07 Series



- 20 BAR
- Pump Pressure
- Lighting during extraction
- small cup 40ml
- large cup 110ml



Power	220-240V 50/60Hz 1400W
Boiler type	Instant type
Heating Time	40s
Extraction Pressure	20Bar
Extraction Cup Size	40ml & 110ml
Water Tank Capacity	1000ml
Product Dimension	372.5*112*242mm
20'GP/40'GP/40HQ	1346/2788/3270PCS
Optional function: Plastic wrench/metal wrench Mechanical buttons/touch buttons	



Mobile waste tray suitable for cups of different heights



Lighting design
Real time observation of coffee extraction status



Key operation
Two cup sizes to choose from



1000ml detachable water tank
Visualization of water level,8-10 cups of coffee water

new

Model:CM-C08 Series



20 BAR Pump Pressure small cup 40ml middle cup 80ml large cup 110ml



Power	220-240V 50/60Hz 1400W
Boiler type	Instant type
Heating Time	40s
Extraction Pressure	20Bar
Extraction Cup Size	40ml & 80ml & 110ml
Water Tank Capacity	600ml
Product Dimension	356*86*220mm
20'GP/40'GP/40HQ	1626/3368/3948PCS
Optional function: Intelligent display 	



Visualize the waste capsule compartment and replace it promptly when it is full



Button operation
Selection of large, medium, and small cups



Detachable water storage box



600ml water tank detachable
Water level visualization

Model:CM-C01



-  Visual large water tank
-  small cup 40ml
-  large cup 110ml



Power	220-240V 50/60Hz 1400W
Boiler type	Instant type
Heating Time	40s
Extraction Pressure	19Bar
Extraction Cup Size	40ml & 110ml
Water Tank Capacity	900ml
Product Dimension	350*112*241mm
20'GP/40'GP/40HQ	1368/2836/3326PCS



One click to extract a good cup of coffee



The wrench conforms to the human-machine design



900ml removable transparent large water tank



Retractable cup holder
Compatible with a variety of cup heights for daily use

Model:CM-C09

new

-  Self cleaning
-  small cup 40ml
-  middle cup 80ml
-  large cup 110ml



Power	220-240V 50/60Hz 1400W
Boiler type	Instant type
Heating Time	40s
Extraction Pressure	20Bar
Extraction Cup Size	40ml & 80ml & 110ml
Water Tank Capacity	950ml
Product Dimension	285*120*256mm
20'GP/40'GP/40HQ	1352/2804/3286PCS



Button operation,Selection of large, medium small cups and self-cleaning



950ml removable visual water tank
8-10 cups of coffee water



Removable waste liquid tray
Can accommodate taller cups



Brewing assembly:Nespresso+Dolce Gusto+Coffee powder and Coffee pod

Model:AC01

new

-  Self cleaning
-  small cup 40ml
-  large cup 110ml



Power	220-240V 50/60Hz 1400W
Boiler type	Instant type
Heating Time	40s
Extraction Pressure	20Bar
Extraction Cup Size	40ml & 110ml
Water Tank Capacity	850ml
Product Dimension	310*120*310mm
20'GP/40'GP/40HQ	1190/2464/2890PCS



Button operation
Selection of large and small cups



850ml removable water tank
Water level visualization



Detachable waste tray
can accommodate taller cups



With self-cleaning function
Extend product lifespan



Nespresso



Dolce Gusto

Coffee powder
and Coffee pod**CM-C03A**

Power	220-240V 50/60Hz 1400W
Boiler type	Instant type
Heating Time	40±5s
Extraction Pressure	20Bar
Extraction Cup Size	40ml & 110ml
Water Tank Capacity	700ml
Product Dimension	290*118*258mm
20'GP/40'GP/40HQ	1432/2968/3480PCS



Nespresso



Dolce Gusto

Coffee powder
and Coffee pod**CM-C05B**

Power	220-240V 50/60Hz 1400W
Boiler type	Instant type
Heating Time	40±5s
Extraction Pressure	20Bar
Extraction Cup Size	25ml & 40ml & 110ml
Water Tank Capacity	700ml
Product Dimension	301*115*257mmv
20'GP/40'GP/40HQ	1322/2740/3212PCS



Nespresso



Dolce Gusto

Coffee powder
and Coffee pod**CM-C03B**

Power	220-240V 50/60Hz 1400W
Boiler type	Instant type
Heating Time	40±5s
Extraction Pressure	20Bar
Extraction Cup Size	40ml & 110ml
Water Tank Capacity	700ml
Product Dimension	290*118*258mm
20'GP/40'GP/40HQ	1432/2968/3480PCS



Nespresso



Dolce Gusto

Coffee powder
and Coffee pod**CM-C06A**

Power	220-240V 50/60Hz 1400W
Boiler type	Instant type
Heating Time	40±5s
Extraction Pressure	20Bar
Extraction Cup Size	25ml & 40ml & 110ml
Water Tank Capacity	700ml
Product Dimension	301*115*257mm
20'GP/40'GP/40HQ	1322/2740/3212PCS



Nespresso



Dolce Gusto

Coffee powder
and Coffee pod**CM-C05A**

Power	220-240V 50/60Hz 1400W
Boiler type	Instant type
Heating Time	40±5s
Extraction Pressure	20Bar
Extraction Cup Size	25ml & 40ml & 110ml
Water Tank Capacity	700ml
Product Dimension	301*115*257mm
20'GP/40'GP/40HQ	1322/2740/3212PCS



Nespresso



Dolce Gusto

Coffee powder
and Coffee pod**CM-C06B**

Power	220-240V 50/60Hz 1400W
Boiler type	Instant type
Heating Time	40±5s
Extraction Pressure	20Bar
Extraction Cup Size	25ml & 40ml & 110ml
Water Tank Capacity	700ml
Product Dimension	301*115*257mm
20'GP/40'GP/40HQ	1322/2740/3212PCS

new

Model:CM-G03A Pro



- Rapid preheating
- Automatic foaming system
- Both hot and cold



Power	220-240V 50/60Hz 1400W
Boiler type	Instant type
Heating Time	40±5s
Extraction Pressure	20Bar
Extraction Cup Size	40±10ml & 110±20ml
Water Tank Capacity	1100ml
Product Dimension	280*157*314mm
20'GP/40'GP/40HQ	868/1798/2108PCS



Tilt design,Easy to operate and observe
Can accommodate larger cups



Automatic foam cup
One click milk, no longer afraid of manual milk



1.1L detachable water tank
Visualization of water level



Intelligent Digital display screen/real-time monitor
Touch control/Intelligent menu selection


Model:CM-G03A Series



- Rapid preheating
- Two panna cotta in one
- small cup 40±10ml
- large cup 110±20ml



Power	220-240V 50/60Hz 1400W
Boiler type	Instant type
Heating Time	40±5s
Extraction Pressure	15Bar
Extraction Cup Size	40±10ml & 110±20ml
Water Tank Capacity	1100ml
Product Dimension	280*157*314mm
20'GP/40'GP/40HQ	972/2014/2362PCS
Optional dials: Thermometer/Digital dial	

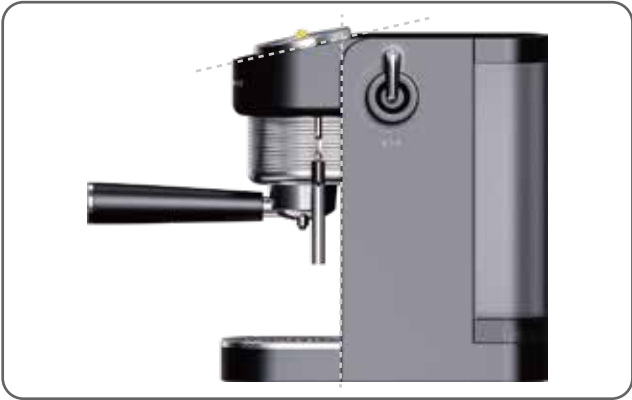

Tilt design,Easy to operate and observe
Can accommodate larger cups



51mm double filter powder bowl
With removable water tray



1.1L detachable water tank
Visualization of water level



Intelligent Digital display screen/real-time monitor
Touch control/Intelligent menu selection

Model:CM-G02A Pro



- Rapid preheating
- Two panna cotta in one
- small cup 40±10ml
- large cup 110±20ml



Power	220-240V 50/60Hz 1400W
Boiler type	Instant type
Heating Time	40±5s
Extraction Pressure	15Bar
Extraction Cup Size	40±10ml & 110±20ml
Water Tank Capacity	1800ml
Product Dimension	286*196*304mm
20'GP/40'GP/40HQ	912/1890/2216PCS



Operation keys function clearly



360° rotation of the steam stick



1.5L detachable water tank
Visualization of water level



Non-slip warm cup holder



CM-G02

Power	220-240V 50/60Hz 1050W
Boiler type	Water storage boiler
Heating Time	110±5s
Extraction Pressure	15Bar
Extraction Cup Size	200±20ml (1 min flow)
Water Tank Capacity	1800ml
Product Dimension	286*196*304mm
20'GP/40'GP/40HQ	912/1890/2216PCS



CM-G01A

Power	220-240V 50/60Hz 1400W
Boiler type	Instant type
Heating Time	40±5s
Extraction Pressure	15Bar
Extraction Cup Size	40±10ml & 110±20ml
Water Tank Capacity	1500ml
Product Dimension	265*180*325mm
20'GP/40'GP/40HQ	842/1684/2124PCS



CM-G02A

Power	220-240V 50/60Hz 1400W
Boiler type	Instant type
Heating Time	40±5s
Extraction Pressure	15Bar
Extraction Cup Size	40±10ml & 110±20ml
Water Tank Capacity	1800ml
Product Dimension	286*196*304mm
20'GP/40'GP/40HQ	912/1890/2216PCS



CM-G01

Power	2220-240V 50/60Hz 1050W
Boiler type	Water storage boiler
Heating Time	110±5s
Extraction Pressure	15Bar
Extraction Cup Size	200±20ml (1 min flow)
Water Tank Capacity	1500ml
Product Dimension	265*180*325mm
20'GP/40'GP/40HQ	842/1684/2124PCS

new

Model:CM-A01 Series

-  Rapid preheating
-  Multi-function accessories
-  Self cleaning



Power	220-240V 50/60Hz 1000W
Boiler type	Instant type
Heating Time	20S
Extraction Pressure	/
Extraction Cup Size	6 & 8 & 10 & 12OZ / 6 & 8 & 10OZ
Water Tank Capacity	850ml
Product Dimension	310*120*310mm
20'GP/40'GP/40HQ	1190/2464/2890PCS

Optional function:
Four concentrations, cup sizes optional and air pump
anti-drip design/three cup sizes, two concentrations
optional



Powerful functionality, with four concentrations and cup sizes to choose from, and self-cleaning function



850ml removable water tank
Water level visualization



Detachable waste tray
can accommodate taller cups



KCUP Brewing cup + coffee filter, Suitable for KCUP
American capsules+coffee powder/tea leaves/tea bags



Model:CM-MK01


new



-  Safety latch
-  Grinding state visualization
-  Power cord storage



Power	220-240V 50Hz 160W
Rotational speed	15000RPM
Silo capacity	150ml
Product Dimension	93*93*182mm
20'GP/40'GP/40HQ	/

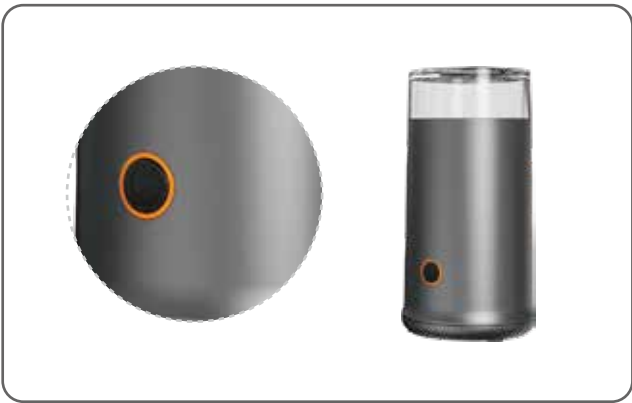

Press start
release stop



Safety lock buckle design
only when the lid is closed can it work



Real time observation of grinding status on top
transparent cover,304 stainless steel blade,15000RPM



Wrap the power cord around the bottom space for easier
storage