





BEARING UNITS



PILLOW BLOCKS - Low Shaft Height HCAK 200 Series

Normal Duty
Eccentric Collar Locking

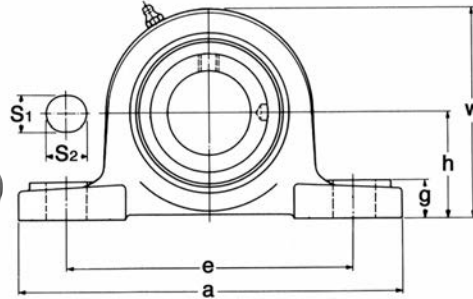

Unit No.	Shaft Dia.		Dimensions inch / mm										Bolt Size	Bearing No.	Housing No.	Weight Lbs kg
	In.	mm	h	a	e	b	S1	S2	g	w	L	n				
HCAK 201-8 202-10 204	1/2 5/8	20	1-1/4 31.8	5 127.0	3-25/32 96.0	1-39/64 40.9	1/2 12.7	5/8 15.9	9/16 14.3	2-15/32 62.7	1.713 43.5	0.669 17	3/8 M10	HC 201-8 202-10 204	AK204	1.63 0.74
204-12	3/4															
HCAK 205 205-14 205-15 205-16	7/8 15/16 1		1-5/16 33.3	5-1/2 139.7	4-1/8 104.8	1-49/64 44.8	1/2 12.7	3/4 19.1	19/32 15.1	2-5/8 66.7	1.744 44.3	0.685 17.4	3/8 M10	HC 205 205-14 205-15 205-16	AK205	2.07 0.94
HCAK 206 206-17 206-18 206-19 206-20	1-1/16 1-1/8 1-3/16 1-1/4S	30	1-9/16 36.7	6-5/16 160.3	4-49/64 121.0	1-3/4 44.5	9/16 14.3	3/4 19.1	5/8 15.9	3-1/8 79.4	1.902 48.3	0.717 18.2	1/2 M14	HC 206 206-17 206-18 206-19 206-20	AK206	3.30 1.50
HCAK 207 207-20 207-21 207-22 207-23	1-1/4 1-5/16 1-3/8 1-7/16		1-13/16 646.0	6-9/16 166.7	5 127.0	1-7/8 47.6	19/32 15.1	3/4 19.1	21/32 16.7	3-9/16 90.5	2.012 51.1	0.740 18.8	1/2 M14	HC 207 207-20 207-21 207-22 207-23	AK207	4.00 1.82
HCAK 208 208-24 208-25	1-1/2 1-9/16		1-15/16 49.2	7-3/32 180.2	5-11/32 135.7	2-1/16 52.4	19/32 15.1	13/16 20.6	23/32 18.3	3-55/64 98.0	2.219 56.4	0.844 21.4	1/2 M14	HC 208 208-24 208-25	AK208	4.84 2.20
HCAK 209 209-26 209-27 209-28	1-5/8 1-11/16 1-3/4	45	2-1/16 52.4	7-7/16 188.9	5-3/4 146.1	2-1/8 54.0	19/32 15.1	13/16 20.6	25/32 19.8	4-1/8 104.8	2.219 56.4	0.844 21.4	1/2 M14	HC 209 209-26 209-27 209-28	AK209	6.49 2.95
HCAK 210 210-30 210-31 210-32	1-7/8 1-15/16 2S		2-3/16 55.6	8-1/32 204.0	6-1/4 158.8	2-1/4 57.2	3/4 19.1	7/8 22.2	13/16 20.6	4-25/64 111.5	2.469 62.7	0.969 24.6	5/8 M16	HC 210 210-30 210-31 210-32	AK210	7.48 3.40
HCAK 211 211-32 211-34 211-35	2 2-1/8 2-3/16		2-7/16 61.9	8-17/32 216.7	6-25/32 172.2	2-3/8 60.3	3/4 19.1	7/8 22.2	7/8 22.2	4-27/32 123.0	2.811 71.4	1.091 27.7	5/8 M16	HC 211 211-32 211-34 211-35	AK211	11.33 5.15
HCAK 212 212-36 212-37 212-38 212-39	2-1/4 2-5/16 2-3/8 2-7/16	60	2-11/16 68.3	9-3/8 238.1	7-5/16 185.7	2-19/32 65.9	3/4 19.1	31/32 24.6	15/16 23.8	5-11/32 135.7	3.059 77.7	1.217 30.9	5/8 M16	HC 212 212-36 212-37 212-38 212-39	AK212	12.54 5.70